SCOPREGA
look beyond

SCOPREGA look beyond BRAVO ^EDR^

ITALIANO

VAI ALLA PAGINA

ENGLISH

GO TO THE PAGE

01. INTRO

- CHI SIAMO/COSA FACCIAMO
- APPLICAZIONI
- CERTIFICAZIONI & GARANZIA

02. GONFIATORI

- PANORAMICA
- GONFIATORI ELETTRICI 12V/24V
- GONFIATORI ELETTRICI 120V/230V
- GONFIATORI MANUALI
- GONFIATORI A PEDALE

03. SISTEMI

- Air10 Pro
- OKTOPLUS
- Manifold

04. REMI E PAGAIE

- PANORAMICA
- REMI
- PAGAIE

05. VALVOLE

- PANORAMICA
- VALVOLE
- RACCORDI

06. ACCESSORI

- MANOMETRI
- COMPONENTI NAUTICI

07. RICAMBI

- RACCORDI E TUBI
- VALVOLE E COMPONENTI
- ALIMENTAZIONE E BORSE

08. AERA

- PANORAMICA
- GONFIATORI ELETTRICI
- SUP KIT

2025

CHI SIAMO

Dal **1979** Scoprega progetta, realizza e commercializza in tutto il mondo **prodotti e accessori per il settore Nautico e degli Sport acquatici**, investendo costantemente in nuove tecnologie e avendo sempre cura e rispetto per l'ambiente.

Il **Made in Italy** firmato Scoprega è da sempre caratterizzato da **alta tecnologia, design ricercato, prestazioni affidabili** e tanta passione per quello che facciamo.

Il nostro motto, "Look beyond", rappresenta la visione di Scoprega: **guardare oltre, mirando al costante miglioramento dei nostri prodotti** e delle loro tecniche di produzione.

L'ottimizzazione del processo produttivo è integrata dai principi dell'ecosostenibilità ed è per questo che ci muoviamo nella direzione del risparmio energetico e del sempre maggiore **utilizzo di materiale riciclato a basse emissioni.**

CERTIFICAZIONI & GARANZIA

Il gruppo Scoprega S.p.A. imposta le proprie attività secondo determinati criteri previsti dalle varie normative, assicurando ai nostri clienti il raggiungimento di un determinato livello qualitativo e soprattutto il suo mantenimento nel tempo e ciò è molto importante. Lavorare giorno dopo giorno nel rispetto di tali standard qualitativi non è facile, ma è un continuo monito, per noi, ad agire in modo sempre più efficiente.

CRIBIS - Prime Company:
il riconoscimento di massima affidabilità commerciale Il riconoscimento è basato sul CRIBIS Rating, un indicatore dinamico e costantemente aggiornato sulla affidabilità dell'azienda Sales Leader.

ISO 9001:
È una certificazione standard internazionale applicabile da tutte le organizzazioni, operanti in qualsiasi settore di attività, basata sugli otto principi di gestione per la qualità, tutti indispensabili per una buona conduzione aziendale.

GPSR:
Tutti i prodotti realizzati dal Gruppo Scoprega sono conformi al regolamento Europero 2023/988 approvato sulla sicurezza generale dei prodotti.

GARANZIA - 2 Anni:
Ciascun prodotto realizzato dal Gruppo Scoprega è protetto per 2 anni a partire dalla data originale di acquisto.

COSA FACCIAMO

Siamo tra i **leader al mondo nella produzione di gonfiatori elettrici, a mano e a pedale, remi e pagaie, valvole di gonfiaggio e accessori per la nautica.**

Le continue ricerche tecniche diventano la base di partenza su cui vengono elaborati e progettati tutti i prodotti, accompagnando parallelamente un approfondito **studio sui materiali più idonei** a seconda dell'applicazione finale.

Lo scopo è quello di **combinare design, efficienza, affidabilità e performance** in prodotti di **facile utilizzo**.

Oltre al **Marine** e **Watersport**, i nostri prodotti sono molto richiesti ed apprezzati nelle applicazioni del settore **Militare** e del **Primo Soccorso**, e la **soddisfazione del cliente** è essenziale per l'implementazione di programmi di sviluppo o rinnovo del prodotto.

APPLICAZIONI

SUP

PIATTAFORME

KITES

CANOE

PICCOLE BARCHE

GRANDI BARCHE

PARABORDI

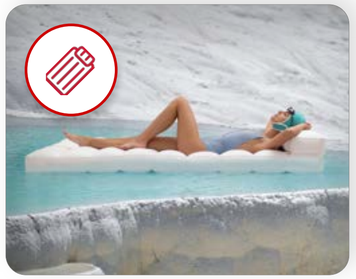

MATERASSINI

GIOCHI

GRANDI STRUTTURE

TENDE

BARRIERE

I nostri prodotti grazie alle loro prestazioni e dotazioni tecniche riescono a ricoprire le più svariate applicazioni del mercato.

In ogni pagina dedicata al gonfiatore e nei rispettivi manuali **saranno riportate le icone, per indicare le varie destinazioni d'uso del prodotto.**

02. GONFIATORI

- PANORAMICA
- GONFIATORI ELETTRICI 12V/24V
- GONFIATORI ELETTRICI 120V/230V
- GONFIATORI MANUALI
- GONFIATORI A PEDALE

PANORAMICA

Negli **anni 90'**, Scoprega ha dato inizio alla produzione di gonfiatori elettrici, ampliando ulteriormente la propria gamma prodotti, ed oggi **i gonfiatori elettrici rappresentano il core business.**

I nostri gonfiatori elettrici sono riconosciuti in tutto il mondo come **prodotti estremamente affidabili e altamente performanti.** Lo scopo è combinare design, efficienza, affidabilità e performance in prodotti di facile utilizzo.

Particolarmente di successo, i nostri gonfiatori elettrici per **SUP** e **KITE vantano le migliori prestazioni sul mercato** in termini assoluti di tempi di gonfiaggio.

Nella nostra gamma di gonfiatori elettrici è possibile trovare la **soluzione ideale per tutte le applicazioni di vari settori.** Oltre al **Marine** e **Watersport**, i nostri prodotti sono molto richiesti ed apprezzati nelle applicazioni del settore **Militare** e del **Primo Soccorso.**

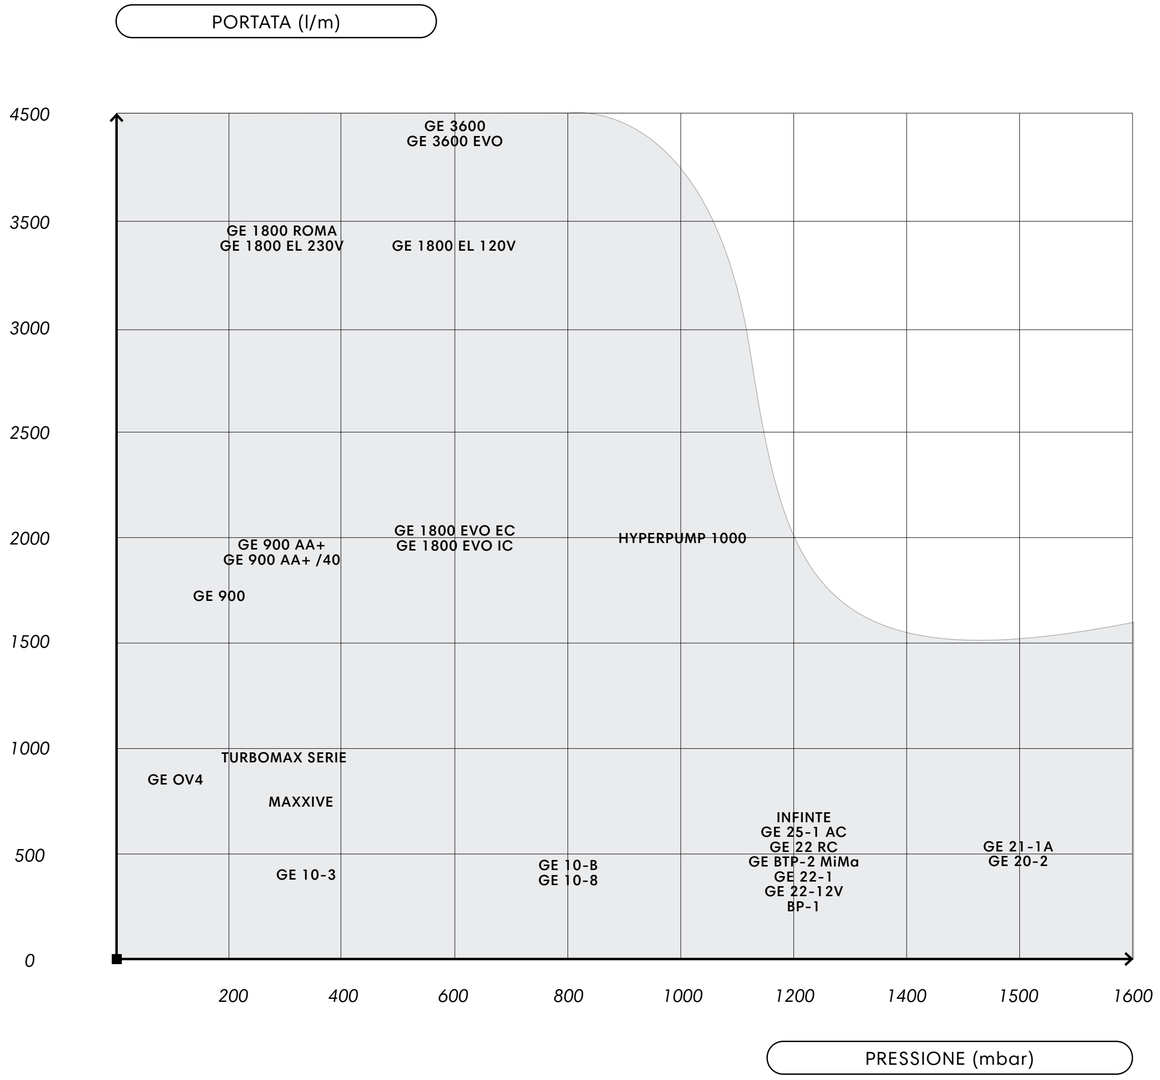

PRESSIONE / PORTATA

Pressione	Portata	12V - 24V	120V - 230V
Alta pressione (maggiore di 500 mbar)	Bassa portata (inferiore ai 500 l/m)	GE BP-1 GE 20-2 GE BTP-2	GE 25-1 AC
	Media portata (tra i 500 e i 1000 l/m)	GE 22 RC GE 22-1 GE 22-12V GE 24 INFINITE	
	Portata elevata (maggiore di 1000 l/m)		1800 EL 120V 1800 EVO 3600 3600 EVO HYPERPUMP 1000
Media pressione (tra i 300 e i 500 mbar)	Bassa portata (inferiore ai 500 l/m)	GE 10-3 GE 10-8 GE 10-B	
	Portata elevata (maggiore di 1000 l/m)		1800 EL 230V 1800 ROMA
Bassa pressione (inferiore ai 300 mbar)	Media portata (tra i 500 e i 1000 l/m)	MAXXIVE	
	Portata elevata (maggiore di 1000 l/m)	TURBOMAX TURBOMAX KIT	GE OV4 GE 900 GE 900 AA+ GE 900 AA+/40

PANORAMICA

Gruppo	Prodotto	Codice	Voltaggio	Pressione Massima	Portata massima	Controllo aut. pressione	Raccordi valvola	Tubo di gonfiaggio
GE 25	GE 25-1 AC	GE3S0009	230 Vac (50 hz)	1,2 bar (17.4 psi)	450 - 250 l/m	NO	SI	1,25 m - Ø 21 mm - EPDM
GE 22	GE 22 RC 12V	GE3S0008	9 ÷16 Vdc	1,25 bar (18,1 psi)	550 - 250 l/m	NO	SI	1,25 m - Ø 21 mm - EPDM
	GE 22 RC 24V	DISPONIBILE	18 ÷ 32 Vdc	1,25 bar (18,1 psi)	550 - 250 l/m	NO	SI	1,25 m - Ø 21 mm - EPDM
	GE 22-1	GE3S0019	110/230 V	1,25 bar (18,1 psi)	500-125 l/m	NO	SI	1,25 m - Ø 21 mm - EPDM
	GE 22 - 12V	GE3S0003	9 ÷16 Vdc	1,25 bar (18,1 psi)	500-125 l/m	NO	SI	1,25 m - Ø 21 mm - EPDM
GE 20-2	GE 20-2	K6130702	110/230 V	1,5 bar (22 psi)	125 l/m	NO	SI	1,25 m - Ø 21 mm - EPDM
GE BP-1	GE BP-1	K6131320	12 Vdc	1,2 bar (18 psi)	160 l/min	NO	SI	1,25 m - Ø 21 mm - EPDM
GE BTP-2 MiMa	GE BTP-2 MiMa	GE3S0004	12 Vdc	1,2 bar (18 psi)	420 - 120 l/m	NO	SI	1,25 m - Ø 21 mm - EPDM
GE 10	GE 10-3	K6131800	9 ÷16 Vdc	300 mbar (4.5 psi)	450 l/m	NO	SI	1,70 m - Ø 21 mm - PVC
	GE 10-8	K6131830	9 ÷16 Vdc	800 mbar (11.6 psi)	450 l/m	NO	SI	1,70 m - Ø 21 mm - PVC
	GE 10-B	K6131860	110/230 V	800 mbar (11.6 psi)	450 l/m	NO	SI	1,70 m - Ø 21 mm - PVC
TURBOMAX	TURBOMAX 12 V	GE4S0008	9 ÷16 Vdc	250 mbar (3.6 psi)	1000 l/m	NO	SI	2,80 m - Ø 25 mm - PU
	TURBOMAX 24 V	GE4S0010	18 ÷ 32 Vdc	250 mbar (3.6 psi)	1000 l/m	NO	SI	2,80 m - Ø 25 mm - PU
	TURBOMAX KIT 12 V	GE4S0009	9 ÷16 Vdc	250 mbar (3.6 psi)	1000 l/m	NO	SI	SU RICHIESTA
	TURBOMAX KIT 24 V	GE4S0011	18 ÷ 32 Vdc	250 mbar (3.6 psi)	1000 l/m	NO	SI	SU RICHIESTA
AEDRA	MAXXIVE 12 V	AD2S0001	9 ÷16 Vdc	240 mbar (3.5 psi)	700 l/min	SI	SI	2,80 m - Ø 21 mm - EPDM
	MAXXIVE 24 V	AD2S0005	18 ÷ 32 Vdc	240 mbar (3.5 psi)	700 l/min	SI	SI	2,80 m - Ø 21 mm - EPDM
	INFINITE 12 V	AD2S0006	9 ÷16 Vdc	1,25 bar (18,1 psi)	500-150 l/m	SI	SI	2,50 m - Ø 21 mm - EPDM
	INFINITE 24 V	AD2S0007	18 ÷ 32 Vdc	1,25 bar (18,1 psi)	500-150 l/m	SI	SI	2,50 m - Ø 21 mm - EPDM

PANORAMICA

Gruppo	Prodotto	Codice	Voltaggio	Pressione Massima	Portata massima	Controllo aut. pressione	Raccordi valvola	Tubo di gonfiaggio
HYPERPUMP	HYPERPUMP 1000	GE8S0005	230 Vac (50 hz)	1000 mBar (14.5 psi)	2000 l/m	SI	NO	SU RICHIESTA
GE 3600	GE 3600	GE7S0007	230 Vac (50 hz)	360 mbar (5.2 psi)	4400 l/m	SI	NO	SU RICHIESTA
	GE 3600 EVO	GE8S0003	230 Vac (50 hz)	600 mbar (8.7 psi)	4400 l/m	SI	NO	SU RICHIESTA
GE 1800	GE 1800 ROMA	K6131900	230 Vac (50 hz)	360 ± 30 mbar (5.2 psi)	3400 l/m	SI	NO	SU RICHIESTA
	GE 1800 EL	GE7S0002	120 Vac (60 hz)	600 mbar (8.7 psi)	3400 l/m	NO	SI	1,50 m - Ø 40 mm - PVC
		GE7S0000	230 Vac (50 hz)	360 mbar (5.2 psi)	3400 l/m	NO	SI	1,50 m - Ø 40 mm - PVC
	GE 1800 EVO EC (controllo esterno)	GE7S0012	120 Vac (60 hz)	600 mBar (8.7 psi)	2000 l/m	SI	SI	1,50 m - Ø 40 mm - PVC
		GE7S0006	230 Vac (50 hz)	600 mBar (8.7 psi)	2000 l/m	SI	SI	1,50 m - Ø 40 mm - PVC
	GE 1800 EVO IC (controllo interno)	GE7S0018	120 Vac (60 hz)	600 mBar (8.7 psi)	2000 l/m	SI	SI	1,50 m - Ø 40 mm - PVC
		GE7S0017	230 Vac (50 hz)	600 mBar (8.7 psi)	2000 l/m	SI	SI	1,50 m - Ø 40 mm - PVC
GE 900	GE 900	K6131650	120 Vac (60 hz)	170 mbar (2.5psi)	1700 l/m	NO	SI	1,50 m - Ø 25 mm - PU
		K6131600	230 Vac (50 hz)	170 mbar (2.5psi)	1700 l/m	NO	SI	1,50 m - Ø 25 mm - PU
	GE 900 A.R.S.	GE4S0007	120 Vac (60 hz)	170 mbar (2.5psi)	1700 l/m	NO	SI	1,50 m - Ø 25 mm - PU
		K6131630	230 Vac (50 hz)	170 mbar (2.5psi)	1700 l/m	NO	SI	1,50 m - Ø 25 mm - PU
	GE 900 AA+	GE4S0004	120 Vac (60 hz)	250 mbar (3,6 psi)	1700 l/m	NO	SI	1,50 m - Ø 25 mm - PU
		K6131610	230 Vac (50 hz)	250 mbar (3,6 psi)	1700 l/m	NO	SI	1,50 m - Ø 25 mm - PU
	GE 900 AA+/40	GE4S0005	230 Vac (50 hz)	250 mbar (3,6 psi)	1700 l/m	NO	SI	1,50 m - Ø 40 mm - PVC
GE OV	GE OV4	K6130415	230 Vac (50 hz)	150 mbar (2.2 psi)	950 l/m	NO	SI	1,50 m - Ø 25 mm - PU

PANORAMICA

I gonfiatori sono accompagnati da un leaflet, sul quale, attraverso i **QR code** presenti, **sarà possibile accedere a tutte le informazioni e i documenti relativi al prodotto.**

MANUALE D'USO:

Pubblicato digitalmente tramite pdf, contiene le informazioni utili al corretto utilizzo del dispositivo.

REGOLAMENTO NORMATIVO EUROPERO DEL GPSR:

Regolamento Generale sulla Sicurezza dei Prodotti (General Product Safety Regulation, GPSR), sostituisce la Direttiva 2001/95/CE e ingloba anche la Direttiva 87/357/CE.
In questa sezione è possibile accedere a tutta la documentazione relativa ai prodotti Scoprega, suddivisi per categoria di prodotto.

GARANZIA DI VENDITA DEL PRODOTTO:

Vengono indicate tutte le condizioni di utlizzo consentito da rispettare per non far decadere la garazia sul prodotto. (Valedità di 2 anni a partire dalla data originale di acquisto).

Attraverso questo **sistema di digitalizzazione** per l'accesso alle informazioni sul prodotto, abbiamo **diminuito l'uso della carta, ponendo un forte accento sulla sostenibilità.**
La digitalizzazione, il reskilling e la sostenibilità sono alcune delle **principali priorità strategiche sulla quale Scoprega S.p.A.** si focalizza, anche per **dare una forte risposta ai consumatori**, che mostrano sempre più un crescente **interesse per l'impatto ambientale.**

I prodotti Scoprega, **su richesta** possono ottenere:

PERSONALIZZAZIONE:

Su specifica richiesta della clientela, Scoprega S.p.A. offre la possibilità di personalizzare i propri prodotti, adattandoli alle proprie esigenze (grafiche, colore, logo etc...).

FUNZIONALITÀ WEBSERVER (CONTROLLO REMOTO):

Consente all'utente di controllare e monitorare a distanza lo stato del gonfiabile.
Grazie a questo sistema, è possibile osservare la pressione interna del gonfiabile, assicurandosi che sia sempre al livello ottimale.

Inoltre se necessario, è possibile intervenire a distanza per gestire la pressione o gonfiare/sgonfiare il gonfiabile in modo rapido e sicuro.

Il sistema di controllo remoto di Scoprega rappresenta un'importante innovazione nel settore dei gonfiabili, contribuendo a migliorare la sicurezza e il controllo, semplificando l'esperienza di utilizzo per tutti gli utenti.

N.B. L'attivazione di questo sistema avviene su richesta specifica del cliente.

N.B. Solo alcuni modelli possono esserne dotati. Verificare le informazioni nella pagina dedicata del gonfiatore.

CONTROLLO REMOTO:

Con il dispositivo acceso, è possibile attivare o disattivare la funzione “WEBSERVER”, che abilita la connettività per il controllo a distanza.
Questa funzionalità assicura una connessione affidabile fino a 20 metri, permettendovi di gestire il gonfiatore da una distanza confortevole senza la necessità di essere fisicamente adiacenti ad esso.

L’interfaccia di controllo remoto è stata progettata per gestire le funzioni principali del gonfiatore in modo intuitivo ed efficiente:

- **START/STOP:** avvia o arresta il gonfiatore.
- **UNITÀ:** seleziona l’unità di misura della pressione.
- **CONTROLLO DELLA PRESSIONE (P.C.S.):** controllo automatico della pressione.
- **NETWORK MANAGEMENT:** Modifica il nome della rete Wi-Fi (SSID) e la password.

Il controllo remoto, tramite app/API, deve essere sviluppato per definire tutti i dati che devono essere scambiati.

Principale

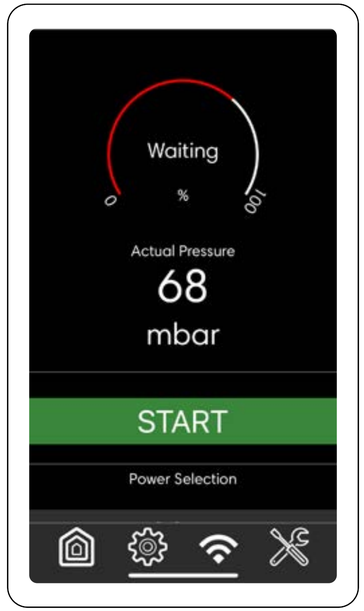

Impostazioni

Wi-Fi settings

GE 25-1 AC

Gonfiatore elettrico adatti ad applicazioni ad alta pressione (grande flusso d'aria) e dotata di commutazione automatica dalla fase a turbina alla fase a doppio compressore.
Da evidenziare la presenza di indicatori LED per lo stato di autonomia della batteria.

INCLUSO NELLA SCATOLA:

- Tubo da 1,25 m - Ø 21 mm in EPDM
- Raccordi valvola
- Borsa a tracolla

SUP PIATTAFORME KITES KAYAK

MANUALE D'USO

Item	Part number	Max. Pressure	Max air flow	Voltage	Charge current	Weight
GE 25-1 AC	GE3S0009	1,5 bar (22 psi)	450 - 250 l/m	230 Vac (50 hz)	4 A	6 kg

FUNZIONI

Gonfia e sgonfia

INFO & DETTAGLI PRODOTTO

Vai al sito

GE 22 RC

Il GE 22 RC è un gonfiatore elettrico ad alta efficienza, sinonimo di affidabilità e funzionalità.
Il GE 22 RC è dotato di due potenti motori, che permettono di gonfiare qualsiasi oggetto ad una pressione fino a 1250 mbar.
Il gonfiatore è dotato di un pannello per i l controllo remoto che permette la gestione completa della pompa, che può essere fissato in una zona di vostra scelta.

INCLUSO NELLA SCATOLA:

- Tubo di collegamento 5 m - Ø 21 mm in EPDM
- Tubo di gonfiaggio 1,25 m - Ø 21 mm in EPDM
- Raccordi valvola
- Pannello di controllo
- Template per installazione
- Cavo connessione gonfiatore - pannello di controllo (5 m)
- Cavo di alimentazione (5 m)

SUP PIATTAFORME KITES FENDER

MANUALE D'USO

Item	Part number	Max. Pressure	Max air flow	Voltage	Max. Current	Weight
GE 22 RC 12V	GE3S0008	1,25 bar (18,1 psi)	550-125 l/m	9 ÷16 Vdc	4 A	4 kg
GE 22 RC 24V	DISPONIBILE	1,25 bar (18,1 psi)	550-125 l/m	18 ÷ 32 Vdc	2 A	4 kg

FUNZIONI

Gonfia e sgonfia

INFO & DETTAGLI PRODOTTO

Vai al sito

GE 22-1

È il risultato di una lunga ricerca che ha voluto aggiungere, in un gonfiatore per SUP altamente performante, un'ulteriore e fondamentale caratteristica per chi vuole godersi al meglio un'esperienza all'aria aperta, ovvero: il silenzio.
Grazie al sistema di gonfiaggio completamente innovativo, il rumore è stato ridotto a meno di 75 dB. Un risultato straordinario per un gonfiatore che raggiunge comunque i 1250 mbar con una capacità iniziale di 500 l/min. Il GE 22-1 è dotato di una batteria al litio (LiFePO4) in grado di gonfiare 3 tavole da SUP da 265 litri a 1250 mbar, con una sola carica.
Tempo medio di gonfiaggio: 6 minuti.

INCLUSO NELLA SCATOLA:

- Tubo da 1,25 m - Ø 21 mm in EPDM
- Raccordi valvola
- Borsa a tracolla
- Caricatore Mastervolt per batteria a litio (LiFePO4)

MANUALE D'USO

Item	Part number	Max. Pressure	Max air flow	Charge voltage	Charge current	Weight
GE 22-1	GE3S0019	1,25 bar (18,1 psi)	500-125 l/m	110/230 V	4 A	4 kg

< 75 dB

SUP PIATTAFORME KITES FENDER

FUNZIONI

Gonfia e sgonfia

INFO & DETTAGLI PRODOTTO

Vai al sito

GE 22-12V

Il GE 22 12V è la versione senza batteria della GE 22 CAPRI.
Si tratta di un gonfiatore per SUP altamente performante, che ha una fondamentale caratteristica per chi vuole godersi al meglio un'esperienza all'aria aperta, ovvero: il silenzio.
Grazie al sistema di gonfiaggio completamente innovativo, il rumore di questo gonfiatore è stato ridotto a meno di 75 dB. Un risultato straordinario per un gonfiatore che raggiunge comunque i 1250 mbar con una capacità di 170 l/min.
L'alimentazione avviene tramite cavo accendi sigari.

INCLUSO NELLA SCATOLA:

- Tubo da 1,25 m - Ø 21 mm in EPDM
- Raccordi valvola
- Borsa a tracolla
- Cavo con morsetti a coccodrillo

MANUALE D'USO

Item	Part number	Max. Pressure	Max air flow	Voltage	Charge current	Weight
GE 22-12V	GE3S0003	1.25 Bar (18.1 psi)	500 - 125 l/min	9 ÷16 Vdc	21 A	3 kg

<75 dB

SUP KITES KAYAK SMALL BOATS MATTRESS

FUNZIONI

Gonfia e sgonfia

INFO & DETTAGLI PRODOTTO

Vai al sito

GE 20-2

Gonfiatore elettrico portatile, alta efficienza e rumorosità ridotta con gruppo pompante a doppio pistone, nessun relay o microswitch.
Gonfiatore di facile impostazone della pressione desiderata tramite il manometro, arresto automatico, con indicatori LED per lo stato di autonomia della batteria.
Ha una batteria 12V DC integrata, ricaricabile tramite trasformatori 110-240 AC/DC, ed è equipaggiato con morsetti per alimentazione diretta da batterie 12V esterne. Presenta inolte un sistema di filtraggio protettivo.

INCLUSO NELLA SCATOLA:

- Tubo da 1,25 m - Ø 21 mm in EPDM
- Raccordi valvola
- Borsa a tracolla
- Caricatore batteria
- Cavo con morsetti a coccodrillo per alimentazione a 12 Volt

MANUALE D'USO

Item	Part number	Max. Pressure	Max air flow	Charge voltage	Charge current	Weight
GE 20-2	K6130702	1,5 bar (22.0 psi)	125 l/m	110/230 V	2 A	6,4 kg

SUP PIATTAFORME KITES KAYAK

FUNZIONI

Gonfia

INFO & DETTAGLI PRODOTTO

Vai al sito

GE 24

Il GE 24 è un gonfiatore leggero, robusto e compatto perfetto per giocattoli, materassini e altri piccoli gonfiabili, ideale per chi ha voglia di gonfiare velocemente e in sicurezza.
Può raggiungere un massimo di 150 mbar di pressione (raggiunti i quali si arresta automaticamente) con una portata che raggiunge i 600 l/min.
Può gonfiare e sgonfiare attraverso le due porte dedicate alle differenti operazioni. Dispone di una batteria integrata di notevole efficienza.

INCLUSO NELLA SCATOLA:

- Tubo da 1,25 m - Ø 21 mm in EPDM
- Raccordi valvola
- Borsa a tracolla
- Caricatore batteria

TOYS

AIR MATTRESS

MANUALE D'USO

Item	Part number	Max. Pressure	Max air flow	Charge voltage	Charge current	Weight
GE 24	GE1S0004	150 mbar (2.2 psi)	600 l/m	110/230 V	3 A	5,8 kg

FUNZIONI

Gonfia e sgonfia

INFO & DETTAGLI PRODOTTO

Vai al sito

GE BP-1

Il gonfiatore ha una portata di 160 l/min ed è dotato di un sistema di gonfiaggio che permette di gonfiare qualsiasi gonfiabile fino a una pressione massima di 1250 mbar (18 psi), oltre a un sistema di controllo che garantisce lo spegnimento automatico al raggiungimento della pressione selezionata.

Il GE BP-1 è il gonfiatore ideale per gonfiare gommoni, kite, gommoni, materassini e piscine.

Infine, il GE BP-1 è dotato di un nuovo sistema di aggancio tubo-gonfiatore a vite, che lo rende ancora più stabile e sicuro.

INCLUSO NELLA SCATOLA:

- Tubo da 1,25 m - Ø 21 mm in EPDM
- Raccordi valvola
- Borsa a tracolla
- Cavo con morsetti a coccodrillo per alimentazione a 12 Volt

SUP PLATFORM KITES KAYAK

USER MANUAL

Item	Part number	Max. Pressure	Max air flow	Charge voltage	Charge current	Weight
GE BP-1	K6131320	1,2 bar (18 psi)	160 l/min	12 Vdc	13 A	2 kg

FUNZIONI

Gonfia e sgonfia

INFO & DETTAGLI PRODOTTO

Vai al sito

GE BTP-2 MiMa

Il GE BTP-2 MiMa rappresenta l'evoluzione di due gonfiatori come il GE BP1 e il GE BTP-1.
È adatto a molte applicazioni ma è ideale per il SUP, potendo raggiungere 1,2 bar (18 psi) di pressione massima. E' dotato di uno speciale manometro per la selezione della pressione desiderata. Quando viene raggiunto, si ferma automaticamente.
Tempo medio di gonfiaggio: 9'30'' (Tavola SUP da 265 litri a 1200 mbar).

INCLUSO NELLA SCATOLA:

- Tubo da 1,25 m - Ø 21 mm in EPDM
- Raccordi valvola
- Borsa a tracolla
- Cavo con morsetti a coccodrillo per alimentazione a 12 Volt

SUP PLATFORM KITES KAYAK

MANUALE D'USO

Item	Part number	Max. Pressure	Max air flow	Voltage	Max. Current	Weight
GE BTP-2 MiMa	GE3S0004	1,2 bar (18 psi)	420 - 120 l/m	12 Vdc	18 A	2,5 kg

FUNZIONI

Gonfia e sgonfia

INFO & DETTAGLI PRODOTTO

Vai al sito

GE 10-3 / 10-8 / GE 10-B

La serie GE 10 è composta da gonfiatori a due stadi di facile utilizzo.

Il primo stadio prodotto da una turbina fornisce alte portate d'aria a bassa pressione. Quando la turbina raggiunge una pressione di ~80 mbar, si spegne e si avvia il automaticamente il compressore bicilindrico (avendo così meno volume di aria) così da raggiunger la pressione massima di 800 mbar per il GE 10-8 e il GE 10-B.

IL GE10-B è dotato di una batteria al piombo ricaricabile incorporata (12FGH36 - 12V 9Ah).

INCLUSO NELLA SCATOLA:

- Tubo da 1,70 m - Ø 21 mm in PVC
- Raccordi valvola
- Borsa a tracolla
- Caricatore batteria (GE 10-B)
- Cavo con morsetti a coccodrillo (GE 10-3 / GE 10-8)

MANUALE D'USO

Item	Part number	Max. Pressure	Max. air flow	Voltage	Max. Current	Weight
GE 10-3	K6131800	300 mbar (4.4 psi)	450 l/m	9 ÷16 Vdc	13 A	2.5 kg
GE 10-8	K6131830	800 mbar (11.6 psi)	450 l/m	9 ÷16 Vdc	13 A	2.5 kg
Item	**Part number**	**Max. Pressure**	**Max. air flow**	**Charge voltage**	**Charge current**	**Weight**
GE 10-B	K6131860	800 mbar (11.6 psi)	450 l/m	110/230 Vac	3 A	4.7 kg

GE 10-3 / GE 10-8

GE 10-B

SMALL BOATS · KITES · KAYAK · FENDER · LARGE BOATS · MATTRESS · PLATFORM · SMALL TENTS

FUNZIONI

Gonfia e sgonfia

INFO & DETTAGLI PRODOTTO

Vai al sito

SL & HP

Batterie ricaricabili, SL al piombo con una capacità di 9'000 mAh, mentre la batteria HP al NI-MH con una capacità di 10'000 mAh.

Entrambe con un voltaggio 12V e con una massima corrente di scarica 25 A.

- Applicabili a tutte le versione GE BP e GE BTP
- Connessione facilitata ai gonfiatorii
- Inseribile nella sacca di tutte le versione GE BP e GE BTP
- Carica batteria (120V / 230V) compreso

SL BATTERIA

HP BATTERIA

MANUALE D'USO

Item	Part number	Voltage	Max. Current	Capacity	Weight
SL BATTERY	K6131295	12 Vdc	25 A	9'000 mAh	3 kg
HP BATTERY	K6131290	12 Vdc	25 A	10'000 mAh	3 kg

FUNZIONI

Batteria ricaricabile

INFO & DETTAGLI PRODOTTO

Vai al sito

TURBOMAX

Gonfiatore a 12V o 24V capace di gonfiare i maxi gommoni in pochissimi minuti.

- Pressione regolabile fra 175 e 250 mbar con ARRESTO AUTOMATICO
- Cavo ad alto rendimento di 1,70 metri
- Fusibile di sicurezza
- Molto flessibile: può gonfiare grosse camere e piccoli oggetti
- Sistema di controllo a LED integrato *(12V)*

INCLUSO NELLA SCATOLA:

- Tubo da 2,80 m - Ø 25 mm in PU
- Raccordi valvola
- Borsa a tracolla

ACCESSORI

LARGE BOATS SMALL BOATS

MANUALE D'USO

Item	Part number	Max. Pressure	Max air flow	Voltage	Max. Current	Weight
TURBO MAX 12V	GE4S0008	250 mbar (3.6 psi)	1000 l/m	9 ÷16 Vdc	55 A	4 kg
TURBO MAX 24V	GE4S0010	250 mbar (3.6 psi)	1000 l/m	18 ÷ 32 Vdc	35 A	4 kg

FUNZIONI

Gonfia e sgonfia

INFO & DETTAGLI PRODOTTO

Vai al sito

TURBOMAX KIT

La versione TURBOMAX KIT ha un driver integrato digitale sviluppato con DSP e tecnologie MOSFET controllate da un microprocessore.

- I motori si spengono automaticamente una volta raggiunta la pressione impostata.
- Il cavo di alimentazione è lungo 0,50 mt con connettore da 100 A cablato.
- Sistema di controllo a LED integrato (solo 12V)
- Il tubo viene fornito solo su richiesta in bobine da 25 mt. (SP Z031 – R211002).

INCLUSO NELLA SCATOLA:

- Raccordi valvola
- Staffe di fissaggio e connettori elettrici

ACCESSORI

LARGE BOATS SMALL BOATS

MANUALE D'USO

Item	Part number	Max. Pressure	Max air flow	Voltage	Max. Current	Weight
TURBO MAX KIT 12V	GE4S0009	250 mbar (3.6 psi)	1000 l/m	9 ÷16 Vdc	55 A	2,6 kg
TURBO MAX KIT 24V	GE4S0011	250 mbar (3.6 psi)	1000 l/m	18 ÷ 32 Vdc	35 A	3 kg

FUNZIONI

Gonfia e sgonfia

INFO & DETTAGLI PRODOTTO

Vai al sito

HYPERPUMP 1000

Si tratta di un gonfiatore a due stadi ad alta efficienza che garantisce prestazioni eccellenti, ed è caratterizzato dallo spegnimento automatico al raggiungimento della pressione impostata. Realizzato per applicazioani come grandi strutture gonfiabili che hanno bisogno di essere gonfiate in poco tempo, è in grado di raggiungere 1 Bar di pressione massima con delle portate di aria notevoli.

Dotato di un grado di protezione IP65 per l'utilizzo all 'esterno anche in condizioni meterologiche avverse.

IP 65

ACCESSORI

SMALL TENTS | TOYS | STRUCTURE | BARRIERS | PLATFORM

MANUALE D'USO

Item	Part number	Max. Pressure	Max air flow	Max Power	Voltage	Max. Current	Weight
HYPERPUMP 1000	GE8S0005	1 Bar (14.5 psi)	2000 l/m	1,8 KW	230 Vac	20 A	14 kg

FUNZIONI

Gonfia e sgonfia

INFO & DETTAGLI PRODOTTO

Vai al sito

GE 3600

Il gonfiatore GE 3600 è stato sviluppato per quelle applicazioni che necessitano un elevatissimo volume di aria in poco tempo.

Con i suoi 4.400 l/min di portata, il GE 3600 è lo strumento ideale per vele, grandi tende e strutture gonfiabili di notevoli dimensioni, riuscendo a raggiungere 360 mbar di pressione massima.

Inoltre, il gonfiatore è caratterizzato da:

- Sistema automatico di refill.
- Stop automatico al raggiungimento della pressione settata.
- Gestibile attarverso display o, su richiestam via webserver.

Grazie al suo case esterno, con grado di protezione IP 65, è utilizzabile all'esterno anche in condizioni metereologiche avverse.

In base alle esigenze del cliente è possibile fornire a parte il tubo di gonfiaggio della lunghezza necessaria.

IP 65

ACCESSORI

VELE STRUTTURE BARRIERE PARABORDI

MANUALE D'USO

Item	Part number	Max. Pressure	Max air flow	Max Power	Voltage	Max. Current	Weight
GE 3600 230V	GE7S0007	360 mbar (5.2 psi)	4400 l/m	3600 W	230Vac 50Hz	20 A	14 kg

FUNZIONI

Gonfia e sgonfia

INFO & DETTAGLI PRODOTTO

Vai al sito

GE 3600 EVO

Il gonfiatore GE 3600 EVO nasce come modello aggiuntivo partendo dalla GE 3600 con le stesse caratteristiche di portata d'aria, ma con il grande vantaggio di raggiungere una pressione massima di 600 mbar.

Il GE 3600 EVO è lo strumento ideale per parabordi, grandi strutture gonfiabili che necessitano di pressioni interne superiori ai 350 mbar. Anche questo modello è dotato di un case esterno con grado di protezione IP 65, per cui è utilizzabile all'esterno anche in condizioni metereologiche avverse.

In base alle esigenze del cliente è possibile fornire a parte il tubo di gonfiaggio della lunghezza necessaria.

IP 65

ACCESSORI

VELE STRUTTURE BARRIERE PARABORDI

MANUALE D'USO

Item	Part number	Max. Pressure	Max air flow	Max Power	Voltage	Max. Current	Weight
GE 3600 EVO 230V	GE8S0003	600 mbar (8.7 psi)	4400 l/m	3600 W	230Vac 50Hz	20 A	14 kg

FUNZIONI

Gonfia e sgonfia

INFO & DETTAGLI PRODOTTO

Vai al sito

GE 1800 ROMA

Il GE 1800 ROMA è un gonfiatore per tutte le stagioni (grado di protezione: IP66) adatto a grandi strutture gonfiabili. Grazie all'Automatic Refilling System (A.R.S.), il gonfiatore è in grado di mantenere la pressione nominale all'interno del gonfiabile entro valori prefissati, indipendentemente dalla temperatura ambiente.

La pompa monitora costantemente la variazione di pressione all'interno del gonfiabile e regola il funzionamento per garantire il riempimento e lo scarico della pressione tramite sensore pneumatico.

INCLUSO NELLA SCATOLA:

- Raccordi per abbinare tubo da Ø40mm
- Raccordi per abbinare tubo da Ø25mm
- Tracolla per trasporto

MANUALE D'USO

Item	Part number	Max. Pressure	Max air flow	Max Power	Voltage	Max. Current	Weight
GE 1800 ROMA	K6131900	360 ± 30 mbar (5.2 psi)	3400 l/m	1800 W	230 Vac 50 Hz	9 A	8 kg

IP 66

ACCESSORI

SMALL TENTS TOYS STRUCTURE BARRIERS

FUNZIONI

Gonfia e sgonfia

INFO & DETTAGLI PRODOTTO

Vai al sito

GE 1800 EL

Il GE 1800 EL rappresenta la versione Entry Level della GE 1800 ROMA.
Con un flusso d'aria di 3400 l/min, è ideale per gonfiare velocemente grandi strutture che però non hanno bisogno di essere costantemente monitorate.

INCLUSO NELLA SCATOLA:

- Tubo da 1,50 m - Ø 40 mm in PVC
- Raccordi valvola
- Tracolla per trasporto

IP 66

ACCESSORI

SMALL TENTS TOYS STRUCTURE BARRIERS

MANUALE D'USO

Item	Part number	Max. Pressure	Max air flow	Max Power	Voltage	Max. Current	Weight
GE 1800 EL 230V	GE7S0000	360 mbar (5.2 psi)	3400 l/m	1800 W	230 Vac 50 Hz	9 A	8 kg
GE 1800 EL 120V	GE7S0002	600 mbar (8.7 psi)	3400 l/m	1800 W	120 Vac 60 Hz	18 A	8 kg

FUNZIONI

Gonfia e sgonfia

INFO & DETTAGLI PRODOTTO

Vai al sito

GE 1800 EVO

Un gonfiatore “per tutte le stagioni” (grado di protezione: IP66) adatto a grandi strutture gonfiabili, ma la differenza sta nella pressione massima che può raggiungere: 600 mbar.
Grazie al sistema di rabbocco automatico dell’aria, A.R.S. (Automatic Refilling System), il gonfiatore è in grado di mantenere la pressione nominale all’interno del gonfiabile entro valori predefiniti, indipendentemente dalla temperatura dell’ambiente circostante.
Le versioni GE 1800 EVO-IC (controllo interno), a differenza delle EC (controllo esterno), controllano la pressione direttamente dal tubo di gonfiaggio, senza la necessità di un ulteriore collegamento al gonfiabile.
È possibile controllare le varie funzioni tramite il display o via webserver.

INCLUSO NELLA CONFEZIONE:

- 1,50 m - tubo in PVC Ø 40 mm
- Raccordi per la valvola
- Cinghia di trasporto

MANUALE D’USO

IP 66

ACCESSORI

SMALL TENTS | TOYS | STRUCTURE | BARRIERS

Item	Part number	Max. Pressure	Max air flow	Max Power	Voltage	Max. Current	Weight
GE 1800 EVO 230V EC	GE7S0006	600 mBar (8.7 psi)	2000 l/m	1800 W	230 Vac 50Hz	9 A	6,4 kg
GE 1800 EVO 120V EC	GE7S0012	600 mBar (8.7 psi)	2000 l/m	1800 W	120 Vac 60Hz	18 A	6,4 kg
GE 1800 EVO 230V IC	GE7S0017	600 mBar (8.7 psi)	2000 l/m	1800 W	230 Vac 50Hz	9 A	6,4 kg
GE 1800 EVO 120V IC	GE7S0018	600 mBar (8.7 psi)	2000 l/m	1800 W	120 Vac 60Hz	18 A	6,4 kg

FUNZIONI

Gonfia e sgonfia

INFO & DETTAGLI PRODOTTO

Vai al sito

GE 900 - GE 900 A.R.S.

I GE 900 sono gonfiatori elettrici progettati per gonfiare e sgonfiare prodotti gonfiabili di varie dimensioni. Raggiungono la pressione massima di 170 mbar con una portata di 1700 l/min.
Il tutto con un impatto acustico ridotto (max 85dB).
Il GE 900 A.R.S. (Automatic Refilling System) è un sistema di gonfiaggio e sgonfiaggio automatico. Dispone di un display digitale, facile ed intuitivo, che consente il settaggio della pressione massima e minima entro i quali deve essere mantenuto il gonfiabile.

INCLUSO NELLA SCATOLA GE 900:

- Tubo da 1,50 m - Ø 25 mm in PU (GE 900)
- Raccordi valvola
- Tracolla per trasporto

INCLUSO NELLA SCATOLA GE 900 A.R.S.:

- Tracolla per trasporto

MANUALE D'USO

Item	Part number	Max. Pressure	Max air flow	Max Power	Voltage	Max. Current	Weight
GE 900 120V	K6131650	170 mbar (2.5psi)	1700 l/m	600 W	120 Vac	6 A	2,3 Kg
GE 900 230V	K6131600	170 mbar (2.5psi)	1700 l/m	600 W	230 Vac	3 A	2,3 Kg
GE 900 A.R.S. 120V	GE4S0007	170 mbar (2.5psi)	1700 l/m	600 W	120 Vac	6 A	2,3 Kg
GE 900 A.R.S. 230V	K6131630	170 mbar (2.5psi)	1700 l/m	600 W	230 Vac	3 A	2,3 Kg

<85 dB

GE 900

ACCESSORI

<85 dB

GE 900 A.R.S.

ACCESSORI

SMALL TENTS | TOYS | STRUCTURE | BARRIERS | PLATFORM | FENDER

FUNZIONI

Gonfia e sgonfia

INFO & DETTAGLI PRODOTTO

Vai al sito

GE 900 AA+ - GE 900 AA+/40

Il GE 900 AA+ è progettato per gonfiare e sgonfiare prodotti gonfiabili di varie dimensioni, destinati alle più svariate applicazioni. Il gonfiatore può raggiungere la pressione massima di 250 mbar con una portata di 1700 l/min.

INCLUSO NELLA SCATOLA:

- Tubo da 1,50 m - Ø 25 mm in PU (900 AA+)
- Tubo da 1,50 m - Ø 40 mm in PVC (900 AA+/40)
- Raccordi valvola
- Tracolla per trasporto

MANUALE D'USO

Item	Part number	Max. Pressure	Max air flow	Max Power	Voltage	Max. Current	Weight
GE 900 AA+ 120V	GE4S0004	250 mbar (3,6 psi)	1700 l/min	1000 W	120 Vac (60 Hz)	8 A	2,4 Kg
GE 900 AA+ 230V	K6131610	250 mbar (3,6 psi)	1700 l/min	1000 W	230 Vac (50 Hz)	4 A	2,4 Kg
GE 900 AA+/40	GE4S0005	250 mbar (3,6 psi)	1700 l/min	1000 W	230 Vac (50 Hz)	4 A	2,4 Kg

GE 900 AA+

ACCESSORI

GE 900 AA+ / 40

ACCESSORI

SMALL TENTS | TOYS | STRUCTURE | BARRIERS | PLATFORM | FENDER

FUNZIONI

Gonfia e sgonfia

INFO & DETTAGLI PRODOTTO

Vai al sito

GE OV4

Questo gonfiatore elettrico compatto e versatile è progettato per gonfiare e sgonfiare rapidamente gonfiabili come: kayak, materassi e piccole strutture. Tra le sue caratteristiche principali spicca il filtro anti-sabbia, che protegge il dispositivo dall'ingresso di particelle indesiderate, garantendo una maggiore durata e prestazioni affidabili.

INCLUSO NELLA SCATOLA:

- Tubo da 1,50 m - Ø 25 mm in PU
- Raccordi valvola

ACCESSORI

SMALL TENTS TOYS KAYAK MATTRESS

MANUALE D'USO

Item	Part number	Max. Pressure	Max air flow	Max Power	Voltage	Max. Current	Weight
GE OV4 230V	K6130415	150 mbar (2.2 psi)	950 l/m	400 W	230 Vac	3 A	0.9 kg

FUNZIONI

Gonfia e sgonfia

INFO & DETTAGLI PRODOTTO

Vai al sito

ACCESSORI PER SERIE TURBOMAX

TURBOMAX CONNECTOR
R401159

Connettore (10 x 3 x 3 cm) maschio/ femmina per apparecchi con potenza fino a 100 A 12 VDC. Il kit consente di cablare cavi da 5 a 10 mm2

TURBOMAX 12V	
TURBOMAX 24V	
TURBOMAX KIT 12V	√
TURBOMAX KIT 24V	√

SP Z031
R211002

Tubo di gonfiaggio
25 m /ø 25 mm - PU

TURBOMAX 12V	O
TURBOMAX 24V	O
TURBOMAX KIT 12V	O
TURBOMAX KIT 24V	O

SP 216
R151032

Connettore arancione a baionetta per BRAVO TURBO MAX

TURBOMAX 12V	√
TURBOMAX 24V	√
TURBOMAX KIT 12V	√
TURBOMAX KIT 24V	√

SP 214
R151025

Adattatori + Tubo in PU, dimensioni:
2,8 m x Ø 25 mm

TURBOMAX 12V	√
TURBOMAX 24V	√
TURBOMAX KIT 12V	O
TURBOMAX KIT 24V	O

CONTENITORE TURBO MAX
K6130024

Consente il montaggio del TURBO MAX KIT a filo plancia e protegge il gonfiatore da spruzzi e sporco (Nylon e PE)
Dimensioni: 34,5 x 22 x 1,8 cm

TURBOMAX 12V	O
TURBOMAX 24V	O
TURBOMAX KIT 12V	●
TURBOMAX KIT 24V	●

● Consigliato O Optional √ Incluso

ACCESSORI GONFIATORI ELETTRICI

SP 217
R151052

Con raccordo per Valvola Boston

Dimensioni:
1,5 m x Ø 25 mm

Materiale:
PU

GE 900	O
GE 900 AA+	O
GE 900 AA+/40	O
GE OV4	O

SP 215
R151030

Con raccordo per VA 2005

Dimensioni:
1,5 m x Ø 25 mm

Materiale :
PU

GE 900	O
GE 900 AA+	O
GE 900 AA+/40	O
GE OV4	O

SP Z126
R151133

Con raccordo per 260 H.V.

Dimensioni:
1,5 m x Ø 40 mm

Materiale:
EPDM

GE 900 SERIE	●
GE 1800 SERIE	●
GE 3600 EVO	●
HYPERPUMP 1000	●
GE OV4	●

SP Z134
R151134

Raccordo Tubo-Pompa a Y compatibile
con portagomma da ø 25mm
(R210033) e da ø 40 mm (R210032)

GE 900 SERIE	O
GE 1800 SERIE	O
GE 3600 EVO	O
HYPERPUMP 1000	O
GE OV4	O

GE 900 IP65 KIT
RH0S0018

Kit IP 65 per GE 900

GE 900	O
GE 900 AA+	O
GE 900 AA+/40	O

● Consigliato O Optional √ Incluso

ACCESSORI GONFIATORI ELETTRICI

SP Z034 - Art. 866
R211005



Tubo di controllo pressione
PU Ø 6 mm x 15 mt.

GE 1800 ROMA	●
GE 1800 EVO EC	●

SP 156
R151023N

PER VALVOLE TIPO HR
Raccordo da 6 mm per collegare il tubo di controllo pressione alla valvola della struttura da gonfiare.

GE 1800 ROMA	●
GE 1800 EVO EC	●

SP 157
R151024N

PER VALVOLE TIPO BRAVO 2005
Raccordo da 6 mm per collegare il tubo di controllo pressione alla valvola della struttura da gonfiare.

GE 1800 ROMA	●
GE 1800 EVO EC	●

SP Z032 - Art. 850
R211003 - EPDM

Tubo Ø 40 mm x 15 mt. ad alte prestazioni

GE 900 SERIE	O
GE 1800 SERIE	O
GE 3600 EVO	●
HYPERPUMP 1000	●
GE OV4	O

SP Z033 - Art. 860
R211004 - PVC

Tubo Ø 40 mm x 15 mt. ad alte prestazioni

GE 900 SERIE	O
GE 1800 SERIE	O
GE OV4	O

● Consigliato O Optional √ Incluso

ACCESSORI GONFIATORI ELETTRICI

SP Z027 - Art. 760
R210035

Raccordo tubo-valvola da Ø 40 mm per VALVOLA BRAVO 260 H.V.

GE 1800 ROMA	●
GE 1800 EL	√
GE 1800 EVO	√
GE 900	●
GE 3600 EVO	●
GE OV4	O
HYPERPUMP 1000	●

SP Z135
R151136

Adattatore 40/25 mm per collegare tubi da ø40 mm con raccordi da 25 mm. Da avvitare nell'articolo R210035.

GE 1800 ROMA	O
GE 1800 EL	√
GE 1800 EVO	√
GE 900	O
GE 3600 EVO	O
GE OV4	O
HYPERPUMP 1000	O

SP Z025 - Art. 741
R210033 - 25 mm

Raccordi per abbinare tubi da Ø 25 mm

GE 1800 ROMA	√
GE 900	√
GE 900 AA+	√
GE 900 AA+ / 40	O
GE 1800 EL	O
GE OV4	O

SP Z024 - Art. 740
R210032- 40mm

Raccordi per abbinare tubi da Ø40mm

GE 1800 SERIE	√
GE 900	●
GE 900 AA+	●
GE 900 AA+ / 40	√
HYPYERPUMP 1000	●
GE 3600 EVO	●
GE OV4	●

● Consigliato O Optional √ Incluso

PANORAMICA

Con **oltre 40 anni nel settore** dei gonfiatori, Scoprega **offre gonfiatori manuali e a pedale che possono soddisfare tutte le esigenze dell'utilizzatore.**

Grazie al design e l'ingegneria all'avanguardia è possibile **gonfiare più velocemente e con meno sforzo di qualsiasi altra pompa presente sul mercato, consentendo di raggiungere performance eccezionali col minimo sforzo.**

I **gonfiatori a pedale** invece sono in grado di fornire le soluzioni ideali per tutte le esigenze di gonfiaggio con **capacità che vanno dai 3,5 ai 6 litri e pressione massima dai 300 agli 800mbar.**

Per rendere la durata dei gonfiatori Scoprega più longeva possibile, i **materiali sono resistenti al sole e all'ambiente marino**, e su richiesta sono **disponibili anche le sacche a tracolla e le scatole litografate.**

Gruppo	Prodotto	Codice	Pressione Massima	Capacità massima	Raccordi valvola	Tubo di gonfiaggio
GM NX	GM NX	K6121100	1.9 bar (27.5 psi)	2 x 2000 cc	SI	1,25 m - Ø20 mm - LPDE + EVA
	GM NXS	K6121150	1.9 bar (27.5 psi)	2 x 2000 cc	SI	1,25 m - Ø20 mm - LPDE + EVA
SUPER F	SUPER F - SILVER	GM1N0000	2.0 bar (29 psi)	2x2500 cc	SI	1,25 m - Ø20 mm - LPDE + EVA
	SUPER F - BLACK	6121717N	2.0 bar (29 psi)	2x2500 cc	SI	1,25 m - Ø20 mm - LPDE + EVA
BRAVO 100-D	BRAVO 100-D	K6120540	1.9 bar (27.5 psi)	2 x 2000 cc	SI	1,25 m - Ø20 mm - LPDE + EVA
GM 6	GM 6	K6120770	1 bar (14.5 psi)	2 x 2500 cc	SI	1,25 m - Ø20 mm - LPDE + EVA
GM5	GM 5	GM1S0000	1 bar (14.5 psi)	2 x 2400 cc	SI	1,25 m - Ø20 mm - LPDE + EVA
GM 110 MIL	GM 110 MIL	K6120750	1 bar (14.5 psi)	2 x 2000 cc	SI	1,25 m - Ø20 mm - LPDE + EVA

Gruppo	Prodotto	Codice	Pressione Massima	Capacità massima	Raccordi valvola	Tubo di gonfiaggio
BRAVO 1	BRAVO 1	6070001	500 mbar (7.2 psi)	4 Litre	SI	1,70 m - Ø21 mm - LPDE + EVA
GP 5	GP 5	K6080000	300 mbar (4.35 psi)	5 Litre	SI	1,70 m - Ø21 mm - LPDE + EVA
GP 10	GP 10	6090010	800 mbar (11.6 psi)	5,5 L / 1,6 L	SI	1,70 m - Ø21 mm - LPDE + EVA

GM NX / GM NXS

Il GM NX e GM NXS rappresentano una nuova generazione di pompe a mano ecosostenibili adatte a tutti i tipi di prodotti gonfiabili. Il design esclusivo garantisce alta efficienza e semplicità d'utilizzo. Il corpo è in alluminio riciclato al 75% (CIRCAL®) garantisce una resistenza maggiore agli urti e ne aumenta l'affidabilità, riducendo l'utilizzo di plastica oltre il 50%.

- Commutazione manuale flusso doppio/singolo, per minimizzare lo sforzo nel gonfiaggio
- Maniglia ergonomica con filtro aria e manometro integrato
- Bocca di gonfiaggio sul corpo della pompa (tubo anti attorcigliamento)

INCLUSO NELLA SCATOLA:

- Tubo da 1,25 m - Ø 20 mm in LPDE + EVA
- Raccordi valvola
- Borsa per trasporto

MANUALE D'USO

Item	Part number	Max. Pressure	Capacity	Inflate mode	Weight	Materials
GM NX	K6121100	1.9 bar (27.5 psi)	2 x 2000 cc	double/single action	1,6 kg	ABS + ALUMINUM
GM NXS	K6121150	1.9 bar (27.5 psi)	2 x 1500 cc	double/single action	1,5 kg	ABS + ALUMINUM

GM NX

GM NXS

SUP KITES KAYAK

FUNZIONI

Gonfia e sgonfia

INFO & DETTAGLI PRODOTTO

Vai al sito

SUPER F

La pompa a mano Super-F si basa su una nuova tecnologia che la rende più efficiente (meno sforzo per gonfiare). Il punto chiave è stato applicare all'esterno il tubo di gonfiaggio in alluminio. Altri vantaggi sono:

- la posizione del manometro sul coperchio (non sull'impugnatura), facilitando la lettura della pressione dell'aria
- la porta di gonfiaggio sul corpo, nessun attorcigliamento del tubo durante la fase di gonfiaggio.

Inoltre, il Super-F ha la base pieghevole e le maniglie possono essere smontate per risparmiare spazio nella confezione.

INCLUSO NELLA SCATOLA:

- Tubo da 1,25 m - Ø 20 mm in LPDE + EVA
- Raccordi valvola

MANUALE D'USO

Item	Part number	Max. Pressure	Capacity	Inflate mode	Weight	Materials
SUPER-F SILVER	GM1N0000	2.0 bar (29 psi)	2x2500 cc	double/single action	1,2 kg	ABS
SUPER-F BLACK	6121717N	2.0 bar (29 psi)	2x2500 cc	double/single action	1,2 kg	ABS

SUPER F - SILVER

SUPER F - BLACK

SUP KITES KAYAK

FUNZIONI

Gonfia e sgonfia

INFO & DETTAGLI PRODOTTO

Vai al sito

BRAVO 100-D

Gonfiatori dal design e l'ingegneria innovativa permettono di gonfiare più velocemente e con meno sforzo di qualsiasi altra pompa presente sul mercato, con commutazione manuale flusso doppio/singolo.

La bocca di gonfiaggio sul corpo pompa permette al tubo di mantenersi fermo durante l'utilizzo.

- Manometro e filtro protettivo integrati.
- Tubi interni è in alluminio riciclato al 75% (CIRCAL®).
- Sacca a tracolla e scatola litografata disponibili come optional.

INCLUSO NELLA SCATOLA:

- Tubo da 1,25 m - Ø 20 mm in LPDE + EVA
- Raccordi valvola

MANUALE D'USO

Item	Part number	Max. Pressure	Capacity	Inflate mode	Weight	Materials
BRAVO 100-D	K6120540	1.9 bar (27.5 psi)	2 x 2000 cc	double/single action	1,2 kg	ABS + ALUMINUM

BRAVO 100-D

SUP KITES KAYAK SMALL BOATS LARGE BOATS

FUNZIONI

Gonfia e sgonfia

INFO & DETTAGLI PRODOTTO

Vai al sito

GM 110 MIL

Modello speciale per esercito e gruppi di soccorso, costruito con materiali plastici e metallici resistenti agli urti ed all'usura.

-Commutazione manuale flusso doppio/singolo

-La bocca di gonfiaggio installata sul corpo pompa permette al tubo di mantenersi fermo durante l'utilizzo

-Manometro integrato, filtri protettivi integrati

INCLUSO NELLA SCATOLA:

- Tubo da 1,25 m - Ø 20 mm in LPDE + EVA
- Raccordi valvola

SMALL TENTS LARGE TENTS SMALL BOATS LARGE BOATS

MANUALE D'USO

Item	Part number	Max. Pressure	Capacity	Inflate mode	Weight	Materials
GM 110 MIL	K6120750	1 bar (14.5 psi)	2 x 2000 cc	double/single action	2 Kg	ABS + Aluminum + Acciaio INOX

FUNZIONI

Gonfia e sgonfia

INFO & DETTAGLI PRODOTTO

Vai al sito

BRAVO 1

- Fascia in tessuto rinforzato
- Parti metalliche in acciao inox
- Adattatore universale

INCLUSO NELLA SCATOLA:

- Tubo da 1,70 m - Ø 21 mm in LPDE + EVA
- Raccordi valvola

TOYS KITES KAYAK SMALL BOATS LARGE BOATS MATTRESS

MANUALE D'USO

Item	Part number	Max. Pressure	Capacity	Weight	Materials
BRAVO 1	6070001	500 mbar (7.2 psi)	4 L	1,1 Kg	PA66 / PVC / Inox

FUNZIONI

Gonfia e sgonfia

INFO & DETTAGLI PRODOTTO

Vai al sito

GP 5

- Gonfiatore a pedale ad alte prestazioni
- Raccordi di gonfiaggio per tutte le più comuni valvole

INCLUSO NELLA SCATOLA:

- Tubo da 1,70 m - Ø 21 mm in LPDE + EVA
- Raccordi valvola

TOYS KITES KAYAK SMALL BOATS LARGE BOATS MATTRESS

MANUALE D'USO

Item	Part number	Max. Pressure	Capacity	Weight	Materials
GP 5	K6080000	300 mbar (4.35 psi)	5 L	1,2 Kg	PA66 / PVC / Inox

FUNZIONI

Gonfia e sgonfia

INFO & DETTAGLI PRODOTTO

Vai al sito

GP 10

Il gonfiatore, grazie alla doppia camera, consente di raggiungere senza sforzo la pressione raccomandata per tutti i grossi canotti in tessuto o in gomma.
È dotato di un indicatore visivo di pressione per segnalare l'eccessivo gonfiaggio del canotto, se l'utilizzatore non controlla la pressione con l'apposito manometro.

- Robusto, essendo in nylon caricato vetro, inalterabile al sole e all'ambiente marino
- Grande ma leggero, essendo di materiale plastico (Kg. 1,9)
- Stabile al suolo, grazie ai 4 piedini antiscivolo

INCLUSO NELLA SCATOLA:

- Tubo da 1,70 m - Ø 21 mm in LPDE + EVA
- Raccordi valvola



A
Grande volume d'aria 5,5 L (bassa pressione)
Pressione max 150 mbar (4.4 psi)

B
Minor volume d'aria 1,6 L (alta pressione)
Pressione max 800 mbar (11.6 psi)

TOYS KITES KAYAK SMALL BOATS LARGE BOATS MATTRESS

MANUALE D'USO

Item	Part number	Max. Pressure	Capacity	Weight	Materials
GP 10	6090010	800 mbar (11.6 psi)	5,5 L / 1,6 L	1,9 kg	Nylon + ABS

FUNZIONI

Gonfia e sgonfia

INFO & DETTAGLI PRODOTTO

Vai al sito

03. SISTEMI

- Air10 Pro
- OKTOPLUS
- Manifold

Scoprega guarda al futuro in linea con il suo motto “Look beyond”, concentrandosi sullo **sviluppo di sistemi speciali per applicazioni specifiche**, sia esistenti che in fase di sviluppo.

L’obiettivo e la missione dell’azienda mirano a **sostenere e accompagnare questi sviluppi,** incarnando la visione di guardare oltre e puntando al costante miglioramento delle soluzioni gonfiabili a livello globale.

I sistemi di gonfiggio su specifica richiesta del cliente, insieme a Scoprega S.p.A., **possono essere personalizzati adattandoli alle proprie esigenze** (grafiche, colore, logo etc...).

Air10 Pro

Progettato per soddisfare le esigenze più rigorose dei professionisti, combina prestazioni di alto livello con un'efficienza senza pari in ogni applicazione.
Il tutto racchiuso in un design compatto e robusto, che garantisce durata e facilità di trasporto.
Il funzionamento sorprendentemente silenzioso consente di lavorare con il massimo comfort senza disturbare l'ambiente circostante, con un'affidabilità eccezionale che riduce al minimo i tempi e massimizza la produttività.

INCLUSO NELLA SCATOLA:

- Tubo di gonfiaggio per alta pressione
- Accessori di collegamento tubo - valvola (immagine sotto)

ALTA PRESSIONE

Item	Max. Pressure	Max air flow	Max Power	Voltage	Max. Current	Weight
Air10 Pro	10 Bar (145 psi)	140 l/m	1500 W	230 Vac 50 Hz	5 A	15 kg

FUNZIONI

Gonfia e sgonfia

INFO & DETTAGLI PRODOTTO

Vai al sito

CYRCLE

Innovativo sistema di gonfiaggio autonomo per gommoni per il controllo della pressione dei tubolari del tuo gommone in totale autonomia e controllo.
Progettato per monitorare e regolare costantemente la pressione all'interno di ciascun compartimento del tuo gommone garantisce un controllo impeccabile e continuo, assicurando che la pressione dell'aria nei tubolari rimanga sempre ottimale.
Questo si traduce non solo in una maggiore sicurezza durante la navigazione, prevenendo situazioni potenzialmente pericolose dovute a sbalzi o cali di pressione imprevisti, ma anche in un miglioramento significativo delle prestazioni e della maneggevolezza del gommone.

INCLUSO NELLA SCATOLA:

- Sistema di gonfiaggio.
- Valvole di collegamento tra le camere d'aria.
- Tubi di gonfiaggio per il collegamento.

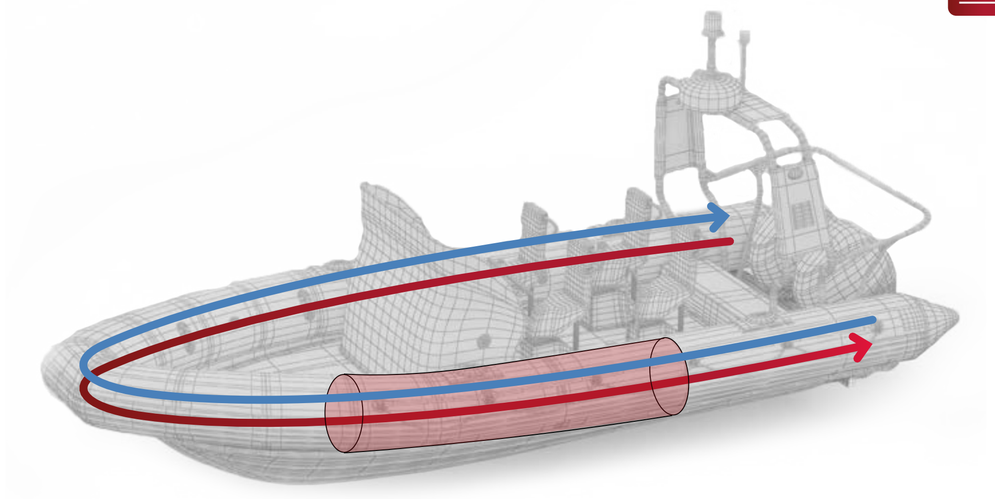

BOATS

Item	Max. Pressure	Max air flow	Voltage	Max. Current	Weight
Cyrcle 12V	250 mbar (3.6 psi)	1000 l/m	9 ÷16 Vdc	55 A	4 kg
Cyrcle 24V	250 mbar (3.6 psi)	1000 l/m	18 ÷ 32 Vdc	35 A	4 kg

FUNZIONI

Gonfia e sgonfia

INFO & DETTAGLI PRODOTTO

Vai al sito

OKTOPLUS

Un **sistema di gonfiaggio e sgonfiaggio** all'avanguardia che ridefinisce l'efficienza operativa e la sicurezza.

Basato sulla connessione di più elementi, collegati tra loro, il sistema offre **prestazioni elevate e una gestione ottimale dello spazio.**

Può erogare aria **fino a un massimo di 350 o 1000 mbar** (a seconda del modello), mantenendo una portata d'aria molto elevata ed è **dotato di un sistema di rilevamento della pressione interna.**

Su tutti i modelli è possibile avere delle staffe di montaggio su cui montare il gonfiatore, disponibili su richiesta (dimensioni di ingombro e requisiti di spazio).



OKTOPLUS
350



OKTOPLUS
600



OKTOPLUS
1000

OKTOPLUS

OKTOPLUS 350

Un sistema di gonfiaggio e sgonfiaggio all'avanguardia che ridefinisce l'efficienza operativa e la sicurezza.

È un gonfiatore progettato non solo per semplificare le attività, ma anche per migliorare la sicurezza attraverso il controllo continuo della pressione (P.C.S.), prevenendo potenziali situazioni di emergenza.

La sua robustezza e affidabilità lo rendono la scelta ideale, offrendo prestazioni elevate e una gestione ottimale dello spazio.

È in grado di erogare aria fino a un massimo di 350 mbar, mantenendo un flusso d'aria molto elevato, ed èdotato anche di un sistema interno di rilevamento della pressione.

Su richiesta sono disponibili staffe di montaggio su cui è possibile installare il gonfiatore.

INCLUSO NELLA SCATOLA:

- Tubo Ø 40 mm in EPDM
- Valvola 260 H.V.

IP 65

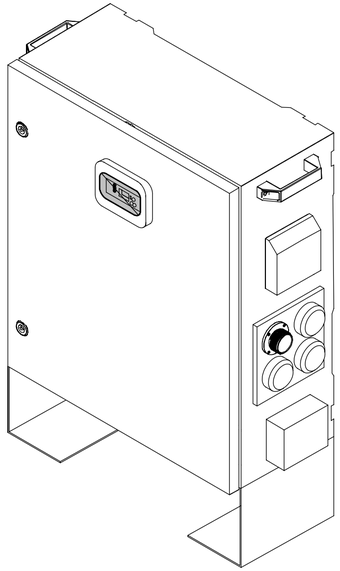

VELE GIOCHI STRUTTURE BARRIERE PIATTAFORME TENDE

Item	Max. Pressure	Max air flow	Voltage	Max. Current	Weight
OKTOPLUS 350	350 mbar (5.1 psi)	4400 l/m	110 -230 Vac (60 - 50 Hz)	30 A	30 kg

FUNZIONI

Gonfia e sgonfia

INFO & DETTAGLI PRODOTTO

Vai al sito

OKTOPLUS 600

Presentiamo un sistema di gonfiaggio e sgonfiaggio ad alte prestazioni è il cuore del sistema, che distribuisce in modo sicuro l'aria tramite tubi flessibili ai pannelli di controllo, posizionati strategicamente intorno allo yacht.

Dal pannello di controllo è possibile gestire il gonfiaggio e lo sgonfiaggio di componenti esterni come tender, piattaforme o parabordi, ottimizzando i tempi e migliorando l'efficienza delle manovre.

Può erogare aria fino a un massimo di 600 mbar, mantenendo un flusso d'aria molto elevato, ed è dotato anche di un sistema interno di rilevamento della pressione.

Su richiesta sono disponibili staffe di montaggio su cui è possibile installare il gonfiatore.

INCLUSO NELLA SCATOLA:

- Tubo ∅ 40 mm in EPDM
- Valvola 260 H.V.

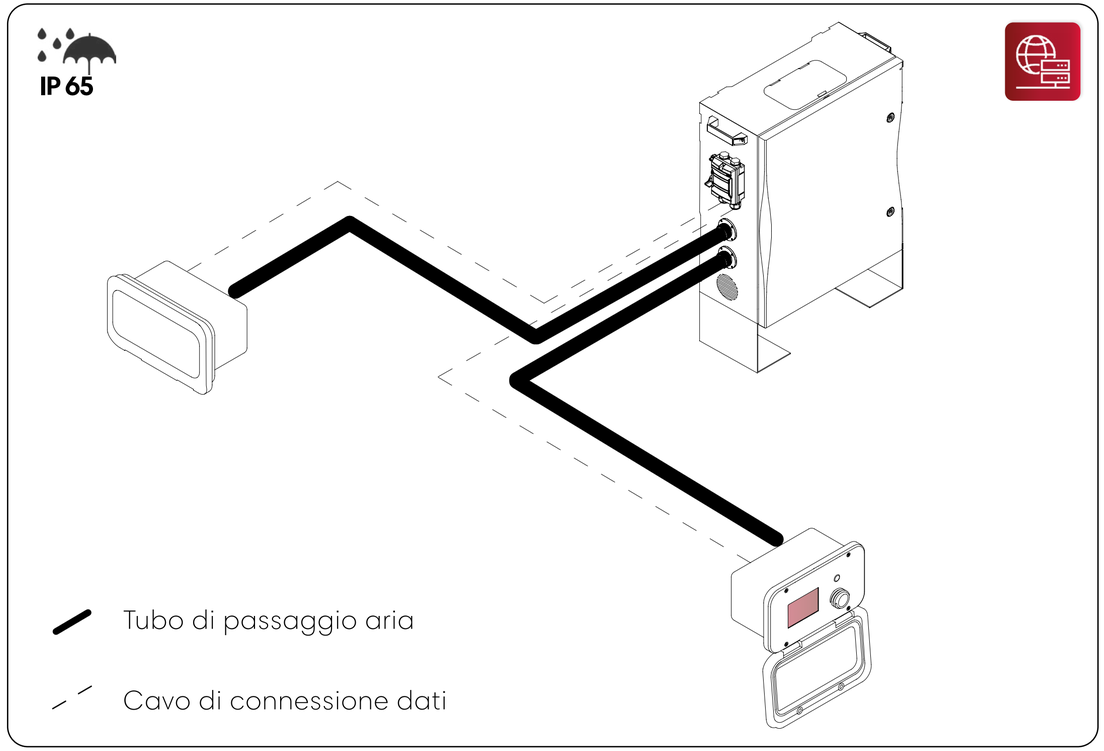

DA INSTALLARE A BORDO

GIOCHI STRUTTURE BARRIERE PIATTAFORME TENDE

Item	Max. Pressure	Max air flow	Voltage	Max. Current	Weight
OKTOPLUS 600	600 mbar (8.7 psi)	4400 l/m	110 -230 Vac (60 - 50 Hz)	30 A	30 kg

FUNZIONI

Gonfia e sgonfia

INFO & DETTAGLI PRODOTTO

Vai al sito

OKTOPLUS 1000

Un sistema di gonfiaggio e sgonfiaggio all'avanguardia che ridefinisce l'efficienza operativa e la sicurezza.

Il cuore del sistema è un gonfiatore progettato non solo per semplificare le attività di routine, ma anche per migliorare la sicurezza attraverso il controllo continuo della pressione (P.C.S.), prevenendo efficacemente situazioni di emergenza potenzialmente pericolose.

La sua robustezza e affidabilità lo rendono la scelta ideale per prestazioni elevate e una gestione ottimale dello spazio.

È in grado di erogare aria fino a un massimo di 1000 mbar, mantenendo un flusso d'aria molto elevato, ed è inoltre dotato di un sistema interno di rilevamento della pressione.

Su richiesta sono disponibili staffe di montaggio su cui è possibile installare il gonfiatore.

INCLUSO NELLA SCATOLA:

- Tubo flessibile Ø 40 mm da 10-20 bar
- Valvola 260 H.V.

IP 65

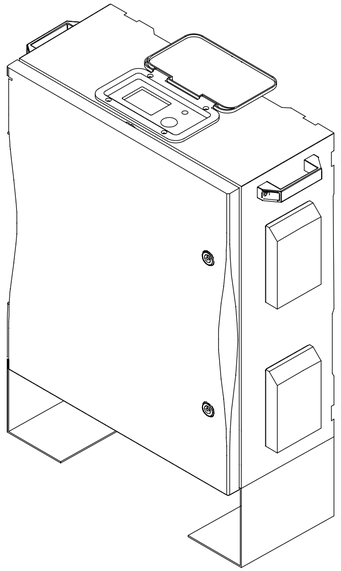

VELE GIOCHI STRUTTURE BARRIERE PIATTAFORME TENDE

Item	Max. Pressure	Max air flow	Voltage	Max. Current	Weight
OKTOPLUS 1000	1000 mbar (14.5 psi)	3500 l/m	110 -230 Vac (60 - 50 Hz)	30 A	30 kg

FUNZIONI

Gonfia e sgonfia

INFO & DETTAGLI PRODOTTO

Vai al sito

MANIFOLD

Scoprega amplia la sua offerta con innovativi sistemi di gonfiaggio: **i Manifold.** Questa rappresenta un passo significativo nel r**afforzamento della nostra posizione come leader nell'innovazione per soluzioni gonfiabili.**

I manifold di gonfiaggio sono componenti cruciali che rivoluzionano il processo di gonfiaggio. La funzione principale è quella di **diversificare il gonfiaggio, incrementando strategicamente i punti di ingresso dell'aria all'interno dei dispositivi gonfiabili.** Questo permette una **distribuzione più efficiente e controllata dell'aria**, garantendo un gonfiaggio uniforme e ottimale, fondamentale per la stabilità e la performance del prodotto finale.

Un punto di forza distintivo dei nostri sistemi manifold è la loro completa adattabilità. **Possono essere progettati e realizzati su specifica richiesta del cliente,** tenendo conto della tipologia del gonfiabile e delle esigenze uniche di ogni applicazione.

Questo approccio personalizzato assicura che ogni manifold sia perfettamente integrato e massimizzi l'efficienza del gonfiaggio, **offrendo soluzioni su misura che rispondono precisamente alle necessità individuali.**

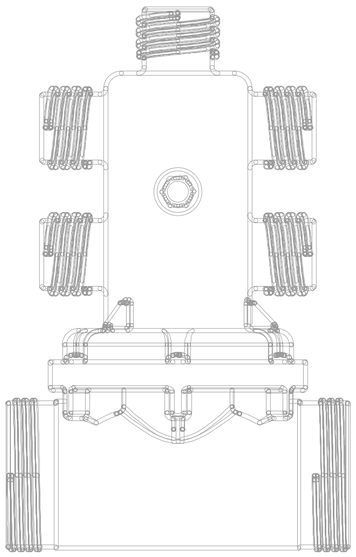

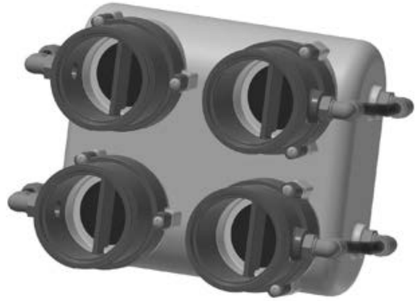

04. REMI E PAGAIE

- PANORAMICA
- REMI
- PAGAIE

PANORAMICA

All'interno di un'ampia gamma di prodotti destinati al settore nautico, **i remi e le pagaie Scoprega rivestono un ruolo importante in termini di produzione.**

Le ricerche sull'**ergonomia** e sull'**idrodinamica** non possono prescindere dalla **necessità di leggerezza e rigidità** che sono proprie dell'utilizzatore finale.

Il risultato di queste ricerche diventa la base di partenza su cui viene elaborato il Design, accompagnato parallelamente dallo studio sui **materiali più idonei selezionati ad hoc** a seconda dell'applicazione finale dei nostri remi e delle nostre pagaie. Senza mai trascurarne l'estetica.

La gamma di remi e pagaie, ergonomici e galleggianti, copre tutte le applicazioni sportive e di sicurezza oltre a tutte le necessità specifiche dell'utilizzatore.

GALLEGGIABILITÀ:

Tutti i remi e le pagaie prodotte e commercializzate da Scoprega sono state sviluppate e testate per avere una **galleggiabilità in acqua di ~10 minuti.**

RSP

Realizzati in PVC e in alluminio, materiali leggeri e resistenti, di forma e la lunghezza variabili, offrono la massima performance.

Con la lettera K si indicano i modelli dotati di rosone adatto agli scalmi di tipo 145 e 146. In fase di ordine è possibile indicare la distanza tra il rosone e l'impugnatura che si desidera.

Item	Part number		Dimensions	Diametre	MOQ
	Black	Grey			
RSP 160	/	K6501501	160/84 cm	Ø 35 mm x 1 mm	/
RSP 180	K6501600	/	180/84 cm	Ø 35 mm x 1 mm	/
RSP 140 Z	K6501470	K6501471	140 cm	Ø 35 mm x 1 mm	/
RSP 150 Z	K6501480	/	150 cm	Ø 35 mm x 1 mm	/
RSP 160 Z	K6501490	K6501491	160 cm	Ø 35 mm x 1 mm	/
RSP 160 ZK	/	K6501493	160 cm	Ø 35 mm x 1 mm	/
RSP 180 K	K6501602	/	180 cm	Ø 35 mm x 1 mm	/

ON DEMAND, ONLY

Item	Part number		Dimensions	Diametre	MOQ
	Black	Grey			
RSP 160	K6501500	/	160/84 cm	Ø 35 mm x 1 mm	108 pcs
RSP 160 K	K6501550	/	160/84 cm	Ø 35 mm x 1 mm	108 pcs
RSP 160 ZK	K6501492	/	160/84 cm	Ø 35 mm x 1 mm	108 pcs
RSP 150 Z	/	K6501481	150 cm	Ø 35 mm x 1 mm	120 pcs
RSP 150 ZK	K6501482	/	150 cm	Ø 35 mm x 1 mm	108 pcs
RSP 180	/	K6501601	180/84 cm	Ø 35 mm x 1 mm	108 pcs
RSP 180 K	/	K6501603	180 cm	Ø 35 mm x 1 mm	108 pcs

10 min

RSP 140.Z - RSP 150.Z - RSP 160.Z

10 min

RSP 150 - RSP 160 - RSP 180

RSP

Realizzati in PVC e in alluminio, materiali leggeri e resistenti, di forma e la lunghezza variabili, offrono la massima performance.

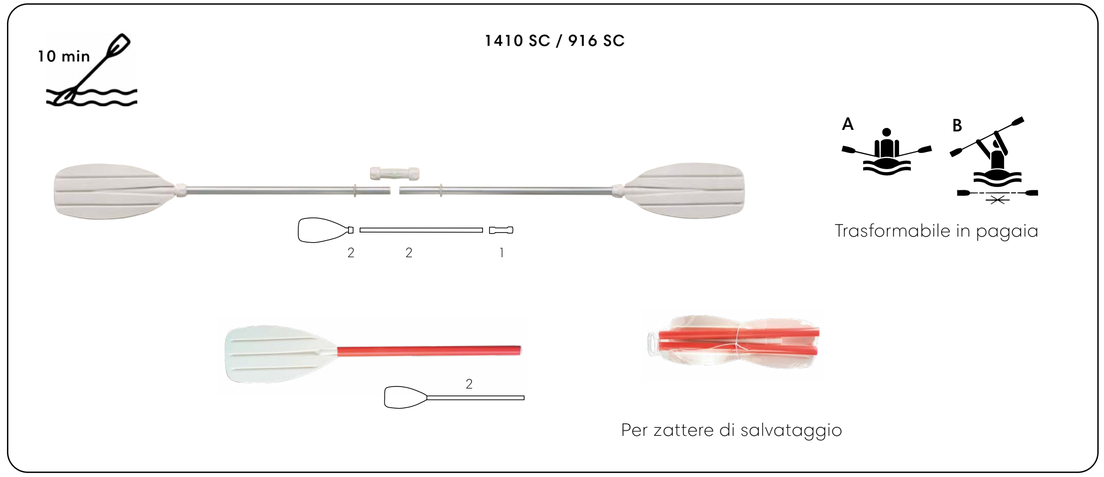

ON DEMAND, ONLY

Item	Part number	Dimensions	Diametre	MOQ
1410/SC	6201421N	222 cm	Ø 28 mm	/

Item	Part number	Dimensions	Diametre	MOQ
916/SC	6942050N	82 cm	Ø 27 mm	/

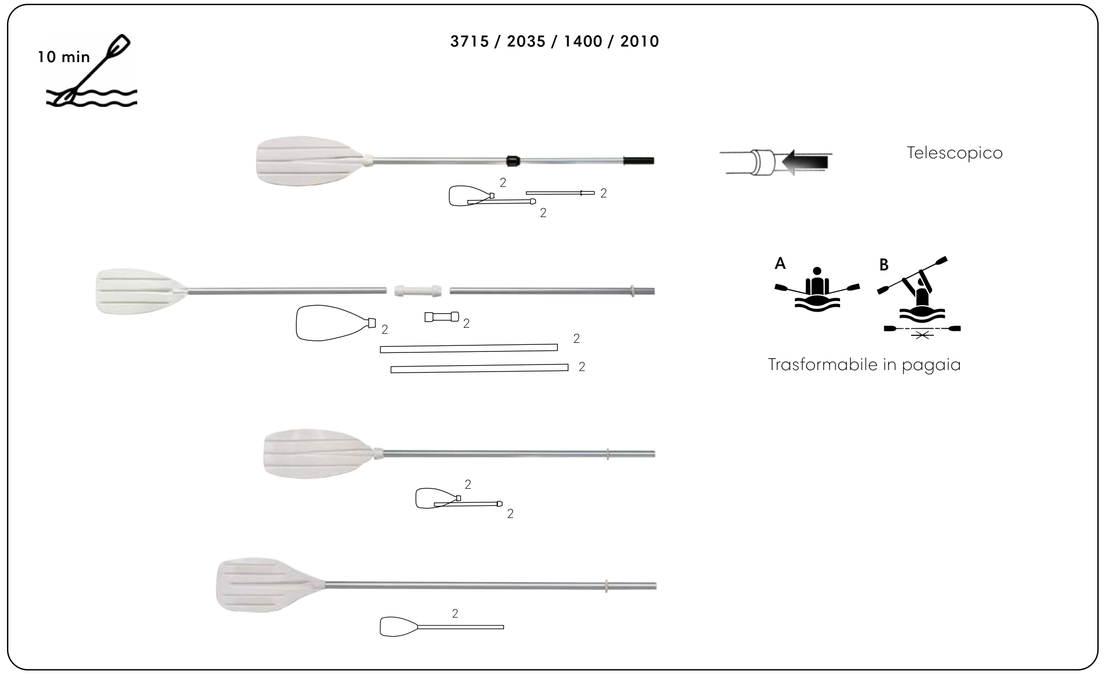

ON DEMAND, ONLY

Item	Part number	Dimensions	Diametre	MOQ
3715/SC	6201415N	120/160 cm Smontato: 70 cm	Ø 28/25 mm	300 pcs
2035/SC	6201221N	A 146cm - B 217cm	Ø 25 mm	300 pcs
1400/SC	6201401N		Ø 28 mm	/
2010/SC	6201111N	140 cm	Ø 28 mm	/

TSP

Realizzati in PVC e in alluminio, materiali leggeri e resistenti, di forma e la lunghezza variabili, offrono la massima performance.

Item	Part number		Dimensions	Diametre	MOQ
	Black	Grey			
TSP 110/155	/	6293101N	A + B + C = 158 cm A + B = 118 cm Smontato: 64 cm	Ø 30/35 x 1 mm	/
TSP 50/120	6293103N	/	A = 50 cm B = 120 cm	Ø 24/28 x 1 mm	/
N100	6281100N	/	120/180 cm	Ø 25/30 x 1 mm	/
IDS 16	6282200N	/	105/180 cm	Ø25/30 x1mm	/

ON DEMAND, ONLY

Item	Part number		Dimensions	Diametre	MOQ
	Black	Grey			
TSP 50/120	/	6293104N	A = 50 cm B = 120 cm	Ø 24/28 x 1 mm	300 pcs

TSP 110/155 - N100- IDS 16

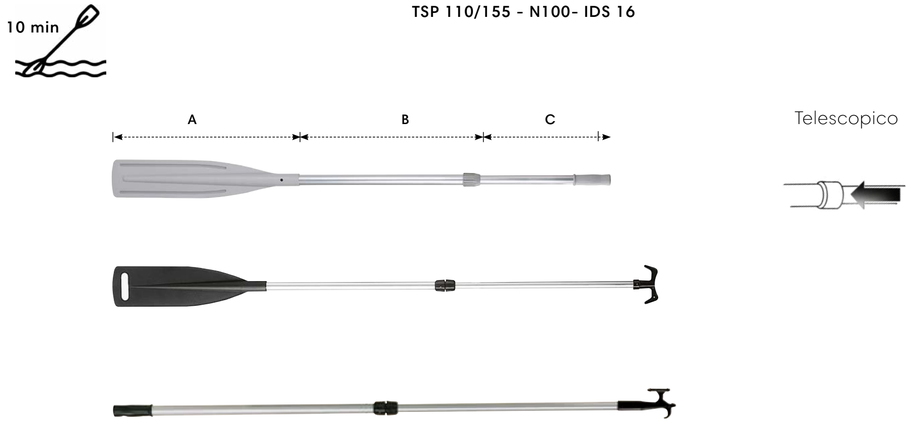

TSP 50/120

KC FIBERGLASS-2

- Manico in alluminio o fibra di vetro
- Pala in polipropilene con 20% fibra di vetro
- Sistema di impugnatura che consente, in ogni momento, di sapere com'è inclinata la pagaia.

Peso: 1180 gr.

Sistema di impugnatura che consente, in ogni momento, di sapere com'è inclinata la pagaia. Manicotti in poliolefina termoretraibile.

Connessione con 3 posizioni.

ON DEMAND, ONLY

Item	Part number		Dimensions	Diametre	MOQ
	Black	Grey			
KC FIBERGLASS-2	6510200N	/	220 cm	Ø 29 x 1.2 mm	300 pcs

XT FIBERGLASS ADJ

Pagaie resistenti e leggere relizzate con manico in fibra di vetro

MANICO / *SHAFT* - 210-240 cm

Pala in materiale extra strong con 40% fibra di vetro.

Lunghezza e orientamento regolabili tramite chiusura a leva

Item	Part number		Dimensions	Diametre	MOQ
	Black	Grey			
XT FIBERGLASS ADJ	6510700N	/	210-240 cm	Ø 29 x 1.2 mm	/

XT FIBERGLASS-2

Pagaie resistenti e leggere relizzate con manico in fibra di vetro

Sistema di impugnatura che consente, in ogni momento, di sapere com'è inclinata la pagaia. Manicotti in poliolefina termoretraibile.

Connessione con 3 posizioni.

Item	Part number		Dimensions	Diametre	MOQ
	Black	Grey			
XT FIBERGLASS - 2	6510610N	/	225 cm	Ø 29 x 1.2 mm	/

XT ALU / XT ALU-2

- Manico in lega di alluminio 6005T5
- Pala in polipropilene con 40% fibra di vetro
- Sistema di impugnatura che consente, in ogni momento, di sapere com'è inclinata la pagaia.

Item	Part number	Dimensions	Diametre	MOQ
XT ALU-2	6511110N	225 cm	Ø 29 x 1.2 mm	/
XT ALU ADJ	6511200N	210-240 cm	Ø 29 x 1.2 mm	/

ON DEMAND, ONLY

Item	Part number	Dimensions	Diametre	MOQ
XT ALU	6511000N	215 cm	Ø 29 x 1.2 mm	300 pcs
	6511010N	215 cm	Ø 29 x 1.2 mm	300 pcs
XT ALU-2	6511100N	215 cm	Ø 29 x 1.2 mm	300 pcs

Sistema di impugnatura che consente, in ogni momento, di sapere com'è inclinata la pagaia. Manicotti in poliolefina termoretraibile.

Connessione con 3 posizioni.

KWB FIBERGLASS-2

- Manico in lega di alluminio 6005T5
- Pala in polipropilene con 40% fibra di vetro
- Sistema di impugnatura che consente, in ogni momento, di sapere com'è inclinata la pagaia.

Peso: 1000 -1500 gr.

Sistema di impugnatura che consente, in ogni momento, di sapere com'è inclinata la pagaia. Manicotti in poliolefina termoretraibile.

Connessione con 3 posizioni.

Item	Part number	Dimensions	Diametre	MOQ
KWB FIBERGLASS - 2	6511620N	230 cm - L = 123 cm	Ø 29 x 1.2 mm	/

ON DEMAND, ONLY

Item	Part number	Dimensions	Diametre	MOQ
KC FIBERGLASS-2	6511610N	220 cm - L = 118 cm	Ø 29 x 1.2 mm	300 pcs

KWB FIBERGLASS ADJ

- Manico in lega di alluminio 6005T5
- Pala in polipropilene con 40% fibra di vetro

MANICO / *SHAFT* - 210-240 cm

Pala in materiale extra strong con 40% fibra di vetro.

Lunghezza e orientamento regolabili tramite chiusura a leva

Item	Part number	Dimensions	Diametre	MOQ
KWB FIBERGLASS ADJ	6511700N	210-240 cm	Ø 29 x 1.2 mm	/

KWB ALU / KWB ALU-2 / KWB ALU-4

- Manico in lega di alluminio 6005T5
- Pala in polipropilene con 40% fibra di vetro

KWB ALU / KWB ALU-2 / KWB ALU-4

Peso: 1000 -1090 gr.



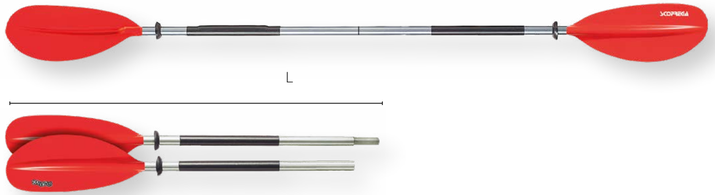

Peso: 1040 - 1130 gr.



Peso: 1040 - 1130 gr.



Item	Part number	Dimensions	Diametre	MOQ
KWB ALU-2	6512100N	220 cm - L = 118 cm	Ø 29 x 1.2 mm	/
KWB ALU-4	6512230N	230 cm - L = 77 cm	Ø 29 x 1.2 mm	/

ON DEMAND, ONLY

Item	Part number	Dimensions	Diametre	MOQ
KWB ALU-2	6512110N	230 cm - L = 123 cm	Ø 29 x 1.2 mm	300 pcs
KWB ALU-4	6512220N	220 cm - L = 72 cm	Ø 29 x 1.2 mm	300 pcs
KWB ALU	6512000N	210 cm	Ø 29 x 1.2 mm	300 pcs

KWB ALU ADJ

- Manico in lega di alluminio 6005T5
- Pala in polipropilene con 40% fibra di vetro

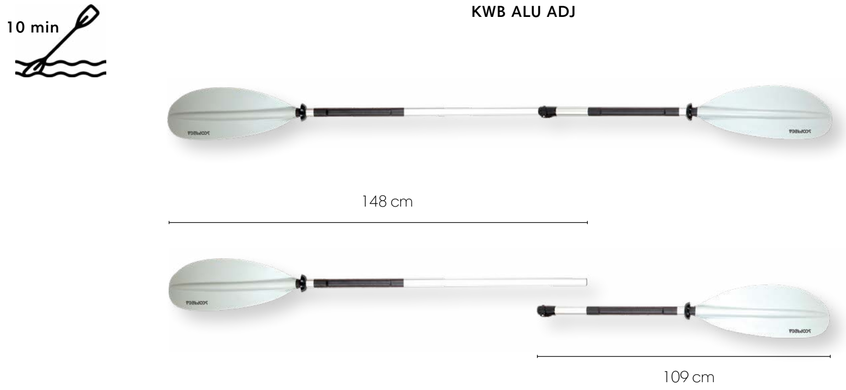

Sistema di impugnatura che consente, in ogni momento, di sapere com'è inclinata la pagaia. Manicotti in poliolefina termoretraibile.

Lunghezza e orientamento regolabili tramite chiusura a leva

Item	Part number		Dimensions	Diametre	MOQ
	Black	Grey			
KWB ALU ADJ	/	6512300N	210-240 cm	Ø 29 x 1.2 mm	/

AK-PRO / DPR 107 / DPS

- Manico in lega di alluminio 6005T5
- Pala in polipropilene con 40% fibra di vetro

10 min

AK-PRO / DPR 107

Peso: 1550 gr.

Peso: 1350 gr.

Item	Part number	Dimensions	Diametre	MOQ
AK-PRO	6271300	210 cm	ALU Ø 32 x 1.2 mm	/

ON DEMAND, ONLY

Item	Part number	Dimensions	Diametre	MOQ
DPR 107	6519800N	210 cm	ALU Ø 32 x 1.2 mm	/

ON DEMAND, ONLY

Item	Part number	Dimensions	Diametre	MOQ
DPS	6519900N	210 cm	ALU Ø 29 x 1.0 mm	300 pcs

10 min

DPS



DPR 107 KIT / DPR 107 C

- Manico in lega di alluminio 6005T5
- Pala in polipropilene con 40% fibra di vetro

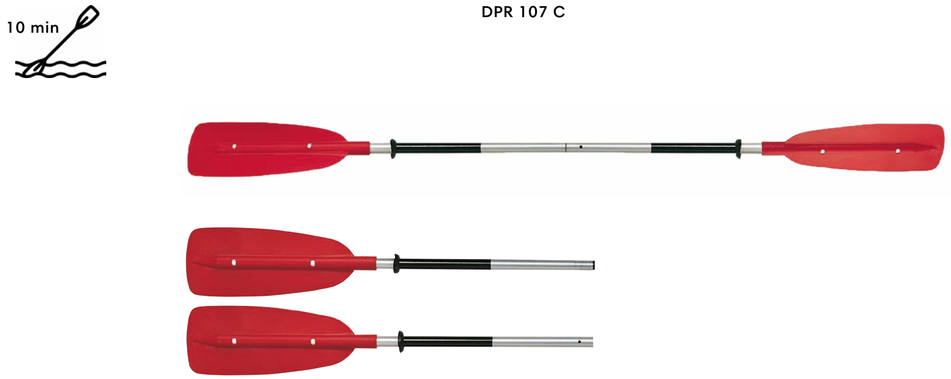

Peso: 1350 gr.

Item	Part number	Dimensions	Diametre	MOQ
DPR 107 KIT	6520100N	**A** 1xKAYAK = 220 cm **B** 2xCANOE = 150 cm	Ø 30 x 1.0 mm	/

ON DEMAND, ONLY

Item	Part number	Dimensions	Diametre	MOQ
DPR 107 C	6520000N	220 cm	Ø 30 x 1.0 mm	300 pcs

RC-PRO / PR 105 / PR 105 C / KK-PRO

- Manico in lega di alluminio 6005T5
- Pala in polipropilene con 40% fibra di vetro

Item	Part number	Dimensions	Diametre	Weight
RC PRO	6525010N	150 cm	Ø 29 mm x 1,2 mm	950 g
PR 105	6525100N	140 cm	Ø 30 mm x 1 mm	850 g
	6525110N	150 cm	Ø 30 mm x 1 mm	850 g
	6525120N	160 cm	Ø 30 mm x 1 mm	850 g
PR 105 C	6525200N	150 cm / Smont: 88cm	Ø 30 mm x 1 mm	850 g

ON DEMAND, ONLY

Item	Part number	Dimensions	Diametre	MOQ
KK PRO	7C0S0000	140 cm	Ø 35 mm x 1 mm	/

10 min

RC PRO - PR 105 - PR 105 C - KK PRO

RC PRO - Peso: 950 gr.

PR 105 - Peso: 850 gr.

PR 105 C - Peso: 850 gr.

KK PRO - Peso: 950 gr.

ALU ADJ / FIBERGLASS ADJ

- Pagaia regolabile con sistema “fast lever lock system”
- Lunghezza regolabile velocemente tramite chiusura a leva
- Pala galleggiante con un nuovo design per performance più elevate
- Divisibile in tre parti per un pratico trasporto
- Doppio sistema di bloccaggio per una maggiore stabilità
- Trasformabile in una pagaia per ragazzi rimuovendo la sezione centrale del manico

Lunghezza e orientamento regolabili tramite chiusura a leva

Item	Part number	Dimensions	Diametre	MOQ
ALU ADJ	6531010N	175/215 cm	Ø 29 x 1.2 mm	/
FIBERGLASS ADJ	6531020N	175/215 cm	Ø 29 x 1.2 mm	/

CARBON ADJ

- Pagaia regolabile con sistema “fast lever lock system”
- Lunghezza regolabile velocemente tramite chiusura a leva
- Pala galleggiante con un nuovo design per performance più elevate
- Divisibile in tre parti per un pratico trasporto
- Doppio sistema di bloccaggio per una maggiore stabilità
- Trasformabile in una pagaia per ragazzi rimuovendo la sezione centrale del manico

Lunghezza e orientamento regolabili tramite chiusura a leva

ON DEMAND, ONLY

Item	Part number	Dimensions	Diametre	MOQ
CARBON ADJ	6531000N	175/215 cm	Ø 29 x 1.2 mm	300 pcs

FIBERGLASS / ALU

- Pagaia telescopica con regolazione rapida
- Regolabile da 170 a 215 cm
- Smontabile in 3 sezioni (ingombro max 86 cm)
- Disponibile con tubo in fibra di vetro e alluminio
- Pala in nylon caricato vetro 23x43 cm
- Leggera e professionale

10 min

SUP FIBERGLASS

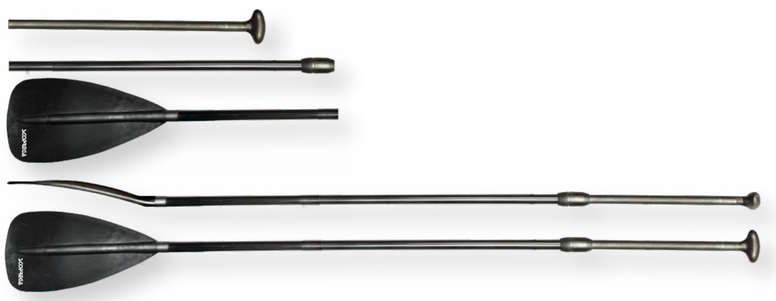

Peso: 1100 gr.

10 min

SUP ALU

Peso: 1050 gr.

Item	Part number	Dimensions	Diametre	MOQ
SUP FIBERGLASS	6531500N	170/215 cm	Ø 29 x 1.8 mm	/
SUP ALU	6531600N	170/215 cm	Ø 29 x 1.8 mm	/

DOUBLE SUP PADDLE KIT

Pagaia leggera e professionale disponibile nella versione ALLUMINIO o FIBRA DI VETRO, trasformabile in pagaia a pala doppia, per utilizzo da seduti.

Regolabile da 170 a 215 cm nella modalità SINGOLA PALA (A); lunghezza fissa 205 cm nella modalità PALA DOPPIA (B)

- Grazie al meccanismo di regolazione rapida, la seconda pala è orientabile a 360°
- Smontabile in 4 sezioni (ingombro max 86 cm)
- Pala in nylon caricato vetro 23x43 cm

Item	Part number	Dimensions	Diametre	MOQ
KIT FIBERGLASS	6531700N	**A** 170/215 cm **B** 205 cm	Ø 29 x 1.8 mm	/

ON DEMAND, ONLY

Item	Part number	Dimensions	Diametre	MOQ
KIT ALU	6531800N	**A** 170/215 cm **B** 205 cm	Ø 29 x 1.4 mm	300 pcs

10 min

DOUBLE SUP PADDLE KIT

A

B

Peso: 1050 gr.

04. VALVOLE

- PANORAMICA
- VALVOLE DI GONFIAGGIO
- VALVOLE DI SOVRAPRESSIONE

PANORAMICA

Dal 1979 Scoprega progetta, produce e vende in tutto il mondo prodotti e accessori per la nautica, il tempo libero e gli sport acquatici.

Abbiamo iniziato con lo stampaggio di materie plastiche e poi abbiamo utilizzato il nostro **know-how nella produzione di valvole di gonfiaggio**. Negli anni '90 siamo entrati in stretto contatto con i settori della nautica e degli sport acquatici.

Qualità, efficienza e design raffinato caratterizzano tutti i nostri prodotti. Tutto ciò è ottenuto dalla ricerca della migliore soluzione in grado di soddisfare le esigenze dei clienti.

Ascoltiamo le **esigenze dei clienti e investiamo in tecnologie "sostenibili" per offrire ai prodotti di altissima qualità** che vantano le migliori prestazioni sul mercato.

VA NX SERIE

VA NX è più piccola delle valvole attualmente disponibili sul mercato.
Il corpo valvola è sostituibile indipendentemente dal gonfiabile a cui è applicato.
E' disponibile in vari colori ed è possibile personalizzare il logo sul coperchio. Insieme alla versione standard sarà possibile ordinare anche la versione con la mesh, VA NX-M.

SCHEDA TECNICA

Black Grey Bronze

Titanium Chrome

Item	Part N.	Color	Fabric hole diametre	Fabric thickness	Dimensions	Nominal flow
VA NX	VG1S0009	nero/black	Ø43 mm	0,5 mm – 3,5 mm	Ø69 x 42 mm [ØD x h]	2000 l/min
	VG1S0000	grigio/grey				
	VG1S0008	titanio/titanium				
	VG1S0007	bronzo/bronze				
	VG1S0006	cromato/chrome				
VA NX core	RH4N0000	grigio/grey	/	/	/	/
Key kit	RH0S0023	grigio/grey	/	/	/	/

SMALL BOATS LARGE BOATS KITES KAYAK SMALL TENTS LARGE TENTS

Testata in conformità alla norma ISO numero 15738:2019

RH4N0000

RH0S0023



VA SERIE

- Valvola versatile, utilizzabile sia per bassa che alta pressione.
- Massima tenuta grazie alla speciale guarnizione a labbro di silicone (massima pressione 2 bar).
- Robusta e compatta con un tappo ergonomico.
- Apertura PUSH-PUSH (mod. VA 2005)

SCHEDA TECNICA

VA 2005

KITES
KAYAK
SMALL BOATS
FENDER
LARGE BOATS
ALL TENTS

VA 2005/A

KITES
KAYAK
SMALL BOATS
FENDER
LARGE BOATS
ALL TENTS

VA 2005 SUP + MESH

PLATFORM
SUP

Item	Part Number	Material	Color
VA 2005	VG2N0002	POM + ABS	nero/black
	VG2N0003		grigio/grey
VA 2005/A	VG2N0004	POM + ABS	nero/black
	VG2N0005		grigio/grey
VA 2005 SUP + MESH	A102870N	POM + ABS	grigio/grey
ART. 721	A942010N*	ABS	grigio/grey
	R601141**		

Testata in conformità alla norma ISO numero 15738:2019

* Min. ordinabile 500 pcs
** Min. ordinabile 1 pcs

Chiave per valvole

BRAVO SERIE

- Valvola versatile, utilizzabile sia per bassa che alta pressione.
- Massima tenuta grazie alla speciale guarnizione a labbro di silicone (massima pressione 2 bar).
- Robusta e compatta con un tappo ergonomico.
- Apertura PUSH-TURN (mod. BRAVO 2000/BRAVO 2001/BRAVO 2014).
- Disponibile anche con rete protettiva (A102870N / A102718N).

SCHEDA TECNICA

BRAVO 2000

BARRIERS TOYS ALL TENTS ALL BOATS

BRAVO 2001

BARRIERS TOYS ALL TENTS ALL BOATS

BRAVO 2014

FENDER ALL TENTS ALL BOATS KAYAK

BRAVO 2014 + MESH

PLATFORM SUP

Item	Part Number	Material	Color
BRAVO 2000	A102705N	PA6 + POM	nero/black
	A102706N		grigio/grey
BRAVO 2001	A102701N	PA6 + POM	nero/black
	A102700N		grigio/grey
BRAVO 2014	A102716N	PA6 + POM	nero/black
	A102717N		grigio/grey
BRAVO 2014 + MESH	A102718N	PA6 + POM	grigio/grey
ART. 721	A942010N*	ABS	nero/black
	R601141**		grigio/grey

Testata in conformità alla norma ISO numero 15738:2019

* Min. ordinabile 500 pcs
** Min. ordinabile 1 pcs

Chiave per valvole

BRAVO 260 H.V.

- Valvola di gonfiaggio ad ampio flusso, specificatamente sviluppata per grandi strutture gonfiabili.
- Massima tenuta grazie alla speciale guarnizione a labbro in silicone
- Robusta e compatta
- Apertuta “push-turn” con sistema a “farfalla”.

Se abbinata ad un gonfiatore con tubo da ø 40 mm, permette un’elevata velocità di gonfiaggio e sgonfiaggio.

SCHEDA TECNICA

SMALL TENTS | TOYS | LARGE TENTS | BARRIERS | LARGE BOATS

Item	Part Number	Material	Color
BRAVO 260 H.V.	VG3N0001	POM	nero/black
SP Z183	R801374	PA12 + ABS	nero/black

Testata in conformità alla norma ISO numero 15738:2019

SP Z183

MINI VALVE SERIE

- Valvola versatile, utilizzabile sia per bassa che alta pressione con massima tenuta grazie alla speciale guarnizione a labbro di silicone (massima pressione 2 bar).
- Robusta e compatta con un tappo ergonomico.
- Apertura PUSH-PUSH.

SCHEDA TECNICA

Item	Part Number	Material	Color
MINI VALVE	A131211N	POM	nero/black
	A131201N		grigio/grey
MINI VALVE	VG1N0004	PVC base + POM	nero/black
	VG1N0005		grigio/grey
MINI VALVE	VG1N0001	TPU base + POM	nero/black
	VG1N0002		grigio/grey
ART. 721	A942010N*	ABS	grigio/grey
	R601141**		

MINI VALVE

Suggested tightening force
Max foce: 15 Nm

SMALL BOATS | FENDER | KAYAK
LARGE BOATS | ALL TENTS | KITES

MINI VALVE

SMALL BOATS | FENDER | KAYAK
LARGE BOATS | ALL TENTS | KITES

Testata in conformità
alla norma ISO numero
15738:2019

Chiave per valvole

MINI BOSTON

- Nuovo design per gonfiare/sgonfiare rapidamente
- Robusta e compatta (ingombro esterno <3 cm)
- Resistente ai raggi UV
- Base in PVC di facile assemblaggio tramite incollaggio o saldatura a radiofrequenza
- Ideale per KITE e tutte le applicazioni in PVC

SCHEDA TECNICA

KITES | ALL TENTS | LARGE BOATS | KAYAK | BARRIERS | MATTRESS

Item	Part Number	Material	Color
MINI BOSTON	A131100N	POM + PVC	nero/black

Testata in conformità alla norma
ISO numero 15738:2019

ART. 230

Valvola di solo gonfiaggio in Nylon, dotata di valvola di non ritorno.

Compatta e resistente e applicabile sul tessuto del gonfiabile per mezzo di ghiera.

SCHEDA TECNICA

LARGE BOATS SMALL BOATS SMALL TENTS MATTRESS TOYS

Testata in conformità alla norma
ISO numero 15738:2019

Item	Part Number	Material	Color
ART. 230	A101230	Nylon	nero/black

ART. 677 / ART. 687 / VA 5/2

Valvola di gonfiaggio in Nylon + POM compatta ad alta efficienza, progettata per essere applicata ad ogni struttura gonfiabile (gommoni, zattere di salvataggio, tende, ecc.).
Questa valvola ha un sistema di non ritorno in fase di gonfiaggio, mentre per una rapida azione di sgonfiaggio può essere completamente rimossa dal codolo di fissaggio (articolo 687).

SCHEDA TECNICA

LARGE BOATS SMALL BOATS SMALL TENTS LARGE TENTS TOYS MATTRESS BARRIERS

Item	Part Number	Material	Color
VA 5/2	K6892009	Nylon (PVC cord)	nero/black
677	A401677	ABS	nero/black
687	KA401687	PVC	nero/black
	KA402688	PU	nero/black

Testata in conformità alla norma
ISO numero 15738:2019

SUP RELIEF VALVE

È la valvola ideale per qualsiasi tipo di SUP o piattarmo gonfiabile di qualsiasi dimensione. Questi prodotti sono testati internamente al 100% prima della spedizione, in conformità alla norma ISO 15738.

PLATFORM SUP

Item	Part Number	Color	Opening		Closing	
			mbar	psi	mbar	psi
HP VALVE	VS2N0000	nero/black	1.5	21.75	1.25	18.12
	VS2N0001	nero/black	1.2	17.40	1.00	14.50

Testata in conformità alla norma
ISO numero 15738:2019

RV 70 / RGV 70

L' RV 70 e RVG 70 sono ideali per qualsiasi tipo di imbarcazione gonfiabili, come gommoni, tender, ecc…, di qualsiasi dimensione. Questi prodotti sono testati internamente al 100% prima della spedizione, in conformità alla norma ISO 15738. È disponibile un'ampia gamma di range di pressione per qualsiasi tipo di specifiche della vostra imbarcazione.

I due modelli differiscono solo nel metodo di fissaggio sul tessuto del gonfiabile:

L'RV 70 può essere saldato grazie al suo collare in PVC.

L'RVG 70, invece, può essere serrato tramite una ghiera.

SCHEDA TECNICA

Item	Part Number	Calib.	Color	Opening			Closing		
				Pax 1000	mbar	psi	Pax 1000	mbar	psi
	KA080301	180/150	rosso/red	18.0	180	2.6	15.0	150	2.2
	KA080302	200/170	nero/black	20.0	200	2.9	17.0	170	2.5
RV 70	KA080303	230/200	grigio/grey	23.0	230	3.3	20.0	200	2.9
	KA080304	255/225	verde/green	25.5	255	3.7	22.5	225	3.3
	KA080305	280/250	blu/blue	28.0	280	4.0	25.0	250	3.6
	KA080173	180/150	rosso/red	18.0	180	2.6	15.0	150	2.2
	KA080174	200/170	nero/black	20.0	200	2.9	17.0	170	2.5
RVG 70	KA080175	230/200	grigio/grey	23.0	230	3.3	20.0	200	2.9
	KA080176	255/225	verde/green	25.5	255	3.7	22.5	225	3.3
	KA080177	280/250	blu/blue	28.0	280	4.0	25.0	250	3.6
SP Z183	R601149	/	nero/black	/					

RV 70

BARRIERS TOYS LARGE BOATS ALL TENTS

RGV 70

BARRIERS TOYS LARGE BOATS ALL TENTS

Testata in conformità alla norma ISO numero 15738:2019

Chiave per valvola - SP Z183

VA 100

Studiata per proteggere i gommoni da eccessiva pressione dovuta a sovra-gonfiaggio o ad innalzamenti causati da escursione termica. La valvola può essere lasciata nella posizione aperta “OPEN” oppure chiusa, con apertura periodica di controllo e conseguente sfiato.

Il tappo è amovibile e l’apertura e chiusura si effettuano ruotando, con il palmo della mano premuto, fino a far combaciare il punto colorato con la tacca di riferimento. Valvola collaudata al 100%

Per l’assemblaggio del tappo, da parte del fabbricante, è necessaria una chiavetta esagonale.

- Molto affidabile e precisa
- Adatta all’impiego in adempimento alla norma ISO 15738
- Diametro del foro nel tessuto: 37 mm

SCHEDA TECNICA

LARGE BOATS SMALL BOATS

Item	Part Number	Calib.	Color	Opening			Closing		
				Pax 1000	mbar	psi	Pax 1000	mbar	psi
VA 100	A080195N	270/230	verde/green	2.7	270	3.9	2.3	230	3.3
	A080196N	300/270	giallo/yellow	3.0	300	4.3	2.7	270	3.9
	A080197N	350/310	rosso/red	3.5	350	5.1	3.1	310	4.5

Testata in conformità alla norma
ISO numero 15738:2019

VA 50 / VA 285

Le valvole VA 50 e VA 285 sono ideali per qualsiasi tipo struttura gonfiabile, e sono collaudate al 100% in adempimento alla norma ISO 15738.

SCHEDA TECNICA

Item	Part Number			Calib.	Color	Opening			Closing		
	PVC base	NBR base	PU base			Pax 1000	mbar	psi	Pax 1000	mbar	psi
VA 50	A080120	A080122	A080121	60/25	bianco/ white	6.0	60	0.87	2.5	25	0.36
	A080130	A080132	A080131	80/50	rosa/pink	8.0	80	1.16	5.0	50	0.72
	A080163	A080164	A080165	180/140	azzurro/ cyan	18.0	180	2.60	14.0	140	2.03
	A080140	A080142	A080141	200/150	oro/gold	20.0	200	1.44	15.0	150	2.17
	A080150	A080152	A080151	225/170	blu/blue	22.5	225	2.60	17.0	170	2.46
	A080160	A080162	A080161	250/200	arancio/ orange	25.0	250	2.90	20.0	200	2.90
	A080166	A080153	A080168	330/250	nero/black	33.0	330	4.79	25.0	250	3.63
VA 285	A080020			60/25	bianco/ white	6.0	60	0.87	2.5	25	0.36
	A080021			80/50	rosa/pink	8.0	80	1.16	5.0	50	0.72
	A080025			180/140	azzurro/ cyan	18.0	180	2.60	14.0	140	2.03
	A080022			200/150	oro/gold	20.0	200	1.44	15.0	150	2.17
	A080023			225/170	blu/blue	22.5	225	2.60	17.0	170	2.46
	A080024			250/200	arancio/ orange	25.0	250	2.90	20.0	200	2.90
	A080026			330/250	nero/black	33.0	330	4.79	25.0	250	3.63
SP Z182	R801372			/	nero/black	/					

VA 50

ALL TENTS

TOYS

VA 285

ALL TENTS

TOYS

Testata in conformità alla norma ISO numero 15738:2019

Chiave per valvole SP Z182 - R801372

VA 30 / VA 280

Le valvole VA 30 e VA 280 sono ideali per qualsiasi tipo struttura gonfiabile, e sono collaudate al 100% in adempimento alla norma ISO 15738.

SCHEDA TECNICA

Item	Part Number			Calib.	Color	Opening			Closing		
	PVC base	NBR base	PU base			Pax 1000	mbar	psi	Pax 1000	mbar	psi
VA 30	A080050	A080052	A080051	60/25	bianco/ white	6.0	60	0.87	2.5	25	0.36
	A080060	A080062	A080061	80/50	rosa/pink	8.0	80	1.16	5.0	50	0.72
	A080070	A080072	A080071	100/65	verde/green	10.0	100	1.44	6.5	65	0.94
	A080080	A080082	A080081	180/135	giallo/yellow	18.0	180	2.60	13.5	135	1.96
	A080090	A080092	A080091	200/150	oro/gold	20.0	200	2.90	15.0	150	2.17
	A080100	A080102	A080101	225/170	blu/blue	22.5	225	3.26	17.0	170	2.46
	A080110	A080112	A080111	240/185	rosso/red	24.0	240	3.48	18.5	185	2.68
	A080047	A080048	A080049	260/200	arancio/ orange	26.0	260	3.76	20.0	200	2.90
VA 280	A080001			60/25	bianco/ white	6.0	60	0.87	2.5	25	0.36
	A080002			80/50	rosa/pink	8.0	80	1.16	5.0	50	0.72
	A080003			100/65	verde/green	10.0	100	1.44	6.5	65	0.94
	A080004			180/135	giallo/yellow	18.0	180	2.60	13.5	135	1.96
	A080005			200/150	oro/gold	20.0	200	1.44	15.0	150	2.17
	A080006			225/170	blu/blue	22.5	225	2.60	17.0	170	2.46
	A080007			240/185	rosso/red	24.0	240	3.48	18.5	185	2.68
	A080008			260/200	arancio/ orange	26.0	260	3.76	20.0	200	2.90
SP Z182	R801372			/	nero/black	/					

VA 30

ALL TENTS

TOYS

VA 280

ALL TENTS

TOYS

Testata in conformità
alla norma ISO numero
15738:2019

Chiave per valvole SP Z182 - R801372

VA 240 / VA 20

Le valvole VA 240 e VA 20 sono ideali per qualsiasi tipo struttura gonfiabile, e sono collaudate al 100% in adempimento alla norma ISO 15738.

SCHEDA TECNICA

Item	Part Number	Calib.	Color	Opening			Closing		
				Pax 1000	mbar	psi	Pax 1000	mbar	psi
VA 240	A101242	60/25	bianco/ white	6.0	60	0.87	2.5	25	0.36
	A101239	80/50	rosa/pink	8.0	80	1.16	5.0	50	0.72
	A101243	100/65	verde/green	10.0	100	1.44	6.5	65	0.94
	A101241	180/135	giallo/yellow	18.0	180	2.60	13.5	135	1.96
	A101249	200/150	oro/gold	20.0	200	2.90	15.0	150	2.17
	A101246	225/170	blu/blue	22.5	225	3.26	17.0	170	2.46
	A101240	240/185	rosso/red	24.0	240	3.48	18.5	185	2.68
	A121238	260/200	arancio/ orange	26.0	260	3.76	20.0	200	2.90
VA 20	A101027	60/25	bianco/ white	6.0	60	0.87	2.5	25	0.36
	A101023	80/50	rosa/pink	8.0	80	1.16	5.0	50	0.72
	A101021	100/65	verde/green	10.0	100	1.44	6.5	65	0.94
	A101020	180/135	giallo/yellow	18.0	180	2.60	13.5	135	1.96
	A101025	200/150	oro/gold	20.0	200	1.44	15.0	150	2.17
	A101022	225/170	blu/blue	22.5	225	2.60	17.0	170	2.46
	A101024	240/185	rosso/red	24.0	240	3.48	18.5	185	2.68
	A101028	260/200	arancio/ orange	26.0	260	3.76	20.0	200	2.90

VA 240

PLATFORM SUP KAYAK

LARGE BOATS ALL TENTS KITES

VA 20

ART. 687

Cod. KA401687 / Mat. PVC

Cod. KA402688 / Mat. PU

PLATFORM SUP KAYAK

LARGE BOATS ALL TENTS KITES

Testata in conformità alla norma
ISO numero 15738:2019

VA 21

La valvola è specificamente pensata per essere installata su qualsiasi tipo di tenda, e permette il rilascio di aria eccessiva all'interno del gonfiabile.

SCHEDA TECNICA

ART. 687

Item	Part Number	Calib.	Color	Opening			Closing		
				Pax 1000	mbar	psi	Pax 1000	mbar	psi
VA 21	A101170N	60/25	bianco/ white	6.0	60	0.87	2.5	25	0.36
	A101160N	80/50	rosa/pink	8.0	80	1.16	5.0	50	0.72
	A101150N	100/65	verde/green	10.0	100	1.44	6.5	65	0.94
	A101140N	180/135	giallo/yellow	18.0	180	2.60	13.5	135	1.96
	A101130N	200/150	oro/gold	20.0	200	1.44	15.0	150	2.17
	A101120N	225/170	blu/blue	22.5	225	2.60	17.0	170	2.46
	A101110N	240/185	rosso/red	24.0	240	3.48	18.5	185	2.68
	A101100N	260/200	arancio/ orange	26.0	260	3.76	20.0	200	2.90
	A101180N	350/300	nero/black	35.0	350	5.07	30.0	300	4.35

Testata in conformità alla norma
ISO numero 15738:2019

ART. 695

Valvola di sgonfiaggio utilizzata nelle applicazioni come i palloni di sollevamento subacquei. Si tratta di un dispositivo di sicurezza che permette lo sgonfiaggio del pallone in caso di necessità. Attraverso l'apertura manuale della valvola, la fuoriuscita di aria che ne consegue, permette di rallentare o terminare il sollevamento subacqueo.

SCHEDA TECNICA

Item	Part Number	Material	Color
ART. 695	A101261	Nylon	grigio/grey

Testata in conformità alla norma
ISO numero 15738:2019

ART. 295 / ART. 296 / ART. 297

Aggancio realizzato in nylon caricato, robusto, di rapido montaggio e smontaggio, riduce notevolmente la manodopera necessaria per connettere i tubolari all'archetto della zattera. È possibile ordinare la versione con valvola di sovrapressione, con valvola unidirezionale, oppure bidirezionale. I codici si riferiscono al KIT completo. I pezzi sono forniti nei 3 componenti principali smontati.

ART. 295: Valvola di sovrappressione

ART. 296: Valvola unidirezionale

ART. 297: Valvola Bi-direzionale

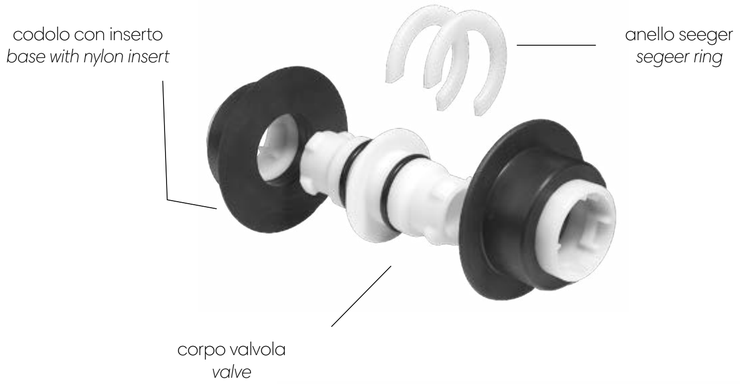

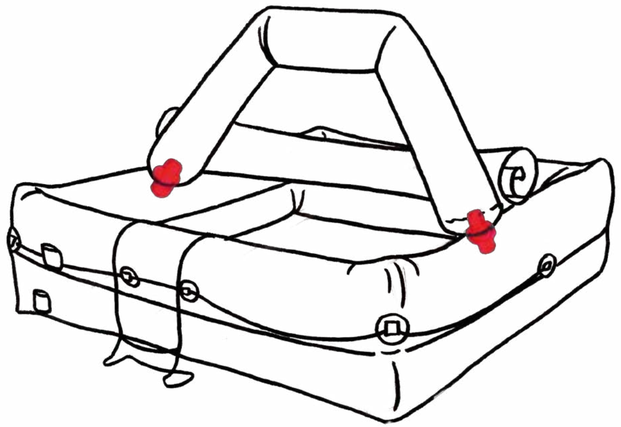

ON DEMAND, ONLY

Item	Part Number			Calib.	Color	Opening			Closing		
	PVC base	NBR base	PU base			Pax 1000	mbar	psi	Pax 1000	mbar	psi
ART. 295	A080200	A080204	A080208	60/25	bianco/ white	6.0	60	0.87	2.5	25	0.36
	A080202	A080206	A080210	80/50	rosa/pink	8.0	80	1.16	5.0	50	0.72
ART. 296	A080220	A080222	A080224	*With oneway valve*							
ART. 297	A080230	A080232	A080234	*With two-way valve*							

Testata in conformità alla norma
ISO numero 15738:2019

RACCORDI VARI

A lato vengono contrassegnati con il simbolo ● i tipi di valvola di gonfiaggio compatibili con il raccordo.

Tutti i codici riportati nelle caselle a lato sono validi solo per lotti superiori a 500 pezzi.

Per ordini di quantità inferiori consultare la lista ricambi da pag. 101.

Art. 711
A600010

2000	●
2001	●
2005-2005/A	●
2014	●
HR	●

Art. 712
A600020

2000	●
2001	●
2005-2005/A	●
2014	●
HR	●

Art. 718
A600030

2000	
2001	●
2005-2005/A	
2014	
HR	●

Art. 718/ADJ
A600040

2000	
2001	●
2005-2005/A	●
2014	●
HR	●

REGOLABILE

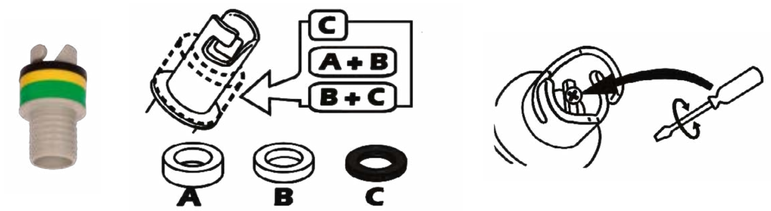

Per adattare alle varie valvole procedere come il disegno:

1) Inserire la guarnizione nera, che deve sempre aderire alla valvola
2) Inserire il distanziale a seconda della necessità
3) Regolare l'altezza della vite per far aprire la valvola

Art. 718/2005
A600050

2000	
2001	
2005-2005/A	●
2014	
HR	

Art. 718/HR
A600060

2000	
2001	
2005-2005/A	
2014	●
HR	●

Art. 718/HRK
A600080

2000	
2001	
2005-2005/A	
2014	
HR	●

Art. 734
A600070

2000	●
2001	
2005-2005/A	
2014	
HR	

05. ACCESSORI

- MANOMETRI
- COMPONENTI NAUTICI

SP 150 - MANOMETRO DIGITALE

- Pressione di esercizio: 0-999 mbar (0-14.5 psi)
- Risoluzione: 10 mbar (0.15 psi)
- Precisione: < 1,0%
- Unità programmabili: mbar – psi – Kpa – bar - Limite di pressione: >150%
- Grado protezione involucri: IP65
- Alimentazione: batteria 9V-DC
- Batterie non incluse

Item	Part number	Pressure	Pcs
SP 150	R551088N	0-999 mbar (0-14.5 psi)	1

MANOMETRI ANALOGICI

Sono strumenti di misura utilizzati per rilevare la pressione in una vasta gamma di applicazioni industriali. Funzionano in modo semplice e affidabile, grazie a un meccanismo che trasforma la pressione rilevata in un movimento meccanico visibile attraverso la lancetta su un quadrante.

Item	Part number	Pressure	Suitable for
SP 98/1	R201098	1 bar (14.5 psi)	/
SP 98/0.5	R201099	0.5 bar (7.3 psi)	/
SP 236	R201110	0 -2 bar	/
SP 237	R201111	0 - 1 bar	/
SP 90 SUP	R551097N	0.5/1.5 bar (7.3/21.8 psi)	/
SP 90-2 SUP	R551002N	0/2 bar (0/29 psi)	/
SP 90 B (bayonet)	R551093N	1 bar (14.5 psi)	/
SP 90 S (screwable)	R551098N	1 bar (14.5 psi)	/
SP 125/1.0	R551091N	1.0 bar (14.5 psi)	/
SP 125/0.5	R551094N	0.5 bar (7.3 psi)	/
SP 119/HR/0.5	R151093N	0.5 bar (7.3 psi)	HR
SP 119/HR/1.0	R151094N	1.0 bar (14.5 psi)	HR
SP 119/2005/0.5	R151096N	0.5 bar (7.3 psi)	Bravo 2005 / H3
SP 119/2005/1.0	R151095N	1.0 bar (14.5 psi)	Bravo 2005 / H3
SP 119/ADJ/0.5	R151092N	0.5 bar (7.3 psi)	adjustable
SP 119/ADJ/1.0	R151090N	1.0 bar (14.5 psi)	adjustable

ON DEMAND, ONLY

Item	Part number	Pressure	Suitable for
SP 119/ADJ/2.0	R151101N *	2.0 bar (29.0 psi)	adjustable

SP 98/1- SP 98/0.5

- 1 bar (14.5 psi) BRAVO 6M

- 0.5bar(7.3psi) BRAVO 7M / 8M

SP 236 - SP 237

- 2 bar (29.0 psi) BRAVO 100 / 101 / 4XS

-1bar(14.5psi) BRAVO110 / 4WD

SP 90 SUP - SP 90-2 SUP

- BRAVO SUP, BRAVO SUP HP

SP 119/HR/0.5
SP 119/HR/1.0

SP 90 S - SP 90 B

- Type B BRAVO 4 ALU RED, BRAVO 4 ALU RED KITE

S- avvitabile / *screwable*
B - baionetta / *baynet*

SP 125/1.0 - SP 125/0.

Permette il controllo della pressione (**A**), e la lettura progressiva durante il gonfiaggio (**B**).



SP 119/HR/0.5
SP 119/HR/1.0

SP 119/ADJ/0.5
SP 119/ADJ/1.0
SP 119/ADJ/2.0

MANIGLIE BARCA

Maniglie realizzate in PVC da instlallare sulle imbarcazioni.

Item	Part number	Material	Color	Dim. mm
333	A158416N	PVC	nero/black	90x280xh65
	A1584 06N	PVC	grigio/grey	90x280xh65
331	A158410N	PVC	nero/black	90x245xh47
	A158412N	PVC	grigio/grey	90x245xh47
322	A151322N	PVC	nero/black	90x220xh32
	A151323N	PVC	grigio/grey	90x220xh32
313 - BLACK	A151313N	PVC	nero/black	100x210xh38
306	A151306N	PVC	nero/black	260x110x45mm
	A158306N	PVC	grigio/grey	260x110x45mm
307	A151307N	PVC	nero/black	260x110x45mm
	A158307N	PVC	grigio/grey	260x110x45mm
321	A151321N	PVC	nero/black	70x205xh46
	A151324N	PVC	grigio/grey	70x205xh46

ON DEMAND, ONLY

Item	Part number	Material	Color	Dim. mm	MOQ
SP 119/ADJ/2.0	R151101N *	PVC	grigio/grey	100x210xh38	200 pcs

ART. 333

ART. 331

ART. 322

ART. 313

ART. 306 / ART. 307

Da ordinare in coppia

ART. 321

FISSAREMI BARCA

Fissaremi per gommoni in PVC

ART. 681

ART. 669

ART. 678

ART. 675



Item	Part number	Material	Color	Dim. mm	Hole mm
681	A309688N	PVC	grigio/grey	80x132xh44	Ø 32 - 35
669	A301669N	PVC	nero/black	64x91xh41	Ø 30
	A309669N	PVC	grigio/grey	64x91xh41	Ø 30
678	A301678N	PVC	nero/black	75xh118	Ø 35
	A309681N	PVC	grigio/grey	75xh118	Ø 35
675	A309676	PVC	grigio/grey	63x90xh22	Ø 10

PORTASCALMI BARCA

Scalmi di varie misure per il fissaggio dei remi barca con apertura di diverso diametro.

Item	Part number	Material	Color	Dim. mm	Hole mm
122	A051123N	PVC	grigio/grey	130 x 91 x h 32	/

Item	Part number	Material	Color	Dim. mm	Hole mm
120 F	A059133N	PVC	grigio/grey	110 x 170 x h 40	/

Item	Part number	Material	Color	Dim. mm	Hole mm
141-90	A051410N	PVC	nero/black	90 x 200 x h 40	/
	A051420N	PVC	grigio/grey	90 x 200 x h 40	/
B1 H1	S241149N	nylon/nylon ottone/brass	nero/black	vedi immagine pag. 93	
	S241147N		grigio/grey		

Item	Part number	Material	Color	Dim. mm	Hole mm
145-90	A051451N	PVC	grigio/grey	90 x 200 x h 40	Ø 10

Item	Part number	Material	Color	Dim. mm	Hole mm
146-180	A051460N	PVC	nero/black	90 x 200 x h 40	Ø 10
	A051461N	PVC	grigio/grey	90 x 200 x h 40	Ø 10

Item	Part number	Material	Color	Dim. mm	Hole mm
140 F	A051400N	PVC	nero/black	90 x 200 x h 50	/
	A051401N	PVC	grigio/grey	90 x 200 x h 50	/

122

Abbinabile agli scalmi CH e BH

120 F

Abbinabile agli scalmi CH e BH

141-90

Abbinabile con B1 e H1

145-90

Da usare con remi con rosone, Ø 10 mm.

146 -180

Da usare con remi con rosone, Ø 10 mm.

140 F + Features

Da abbinare con BH

Tutti i tipi sono smontabili senza scollare la base.
Cima passante in tutti i tipi.

PORTASCALMI BARCA

Scalmi di varie misure per il fissaggio dei remi barca con apertura di diverso diametro.

Item	Part number	Material	Color	Dim. mm	Hole mm
117	A051117N	PVC	nero/black	150 x 220 x h 30	/
	A059117N	PVC	grigio/grey	150 x 220 x h 30	/
620	A351620N	nylon	nero/black	80 x h 60 - Ø 35	/

Item	Part number	Material	Color	Dim. mm	Hole mm
BF	S241144N	nylon/nylon ottone/brass	nero/black	vedi immagine *see image*	vedi immagine *see image*
	S241178N		grigio/grey		
BH	S241176N		grigio/grey		
BL	S241173N		grigio/grey		
CH	S241151N		grigio/grey		
B1 H1	S241149N		nero/black		
	S241147N		grigio/grey		

117

620

B1 H1

BH

BF

BL



CH



ACCESSORI PER BARCHE

Pratici e funzionali i modelli di strozzcime e reggicorda realizzati in PVC.

ART. 535



ART. 444

ART. 442

ART. 400

ART. 401

ART. 409



ART. 110

Placca ovale ormeggio con anello in ottone nichelato.

Item	Part number	Material	Color	Dim. mm	Hole mm
535	A401535N	PVC	nero/black	250x200xh60	/
	A401536N	PVC	grigio/grey	250x200xh60	/
444	A201445N	PVC	grigio/grey	70x100xh33	Ø 13
442	A201443N	PVC	grigio/grey	88x58xh26	Ø 14
400	A205401N	PVC	nero/black	58x83xh24	Ø 13
	A205402N	PVC	grigio/grey	58x83xh24	Ø 13
401	A201401N	PVC	nero/black	Ø75-h19	Ø 13
	A291401N	PVC	grigio/grey	Ø75-h19	Ø 13
409	A201409	PVC	nero/black	73x62xh25	Ø 11
110	A051135N	PVC	nero/black	95x175xh22	/
	A051137N	PVC	grigio/grey	95x175xh22	/

SUPPORTI ASSE PER GOMMONI

Piastre per rinforzare lo specchio di poppa in corrispondenza del motore e distribuire le sollecitazioni su un'area più ampia.

Costruite in polipropilene, aiutano nella protezione dello scafo. Possono essere applicate sia entro che fuori bordo. Disponibili in 4 misure, colori grigio o nero.

ART. 671

Corpri asse

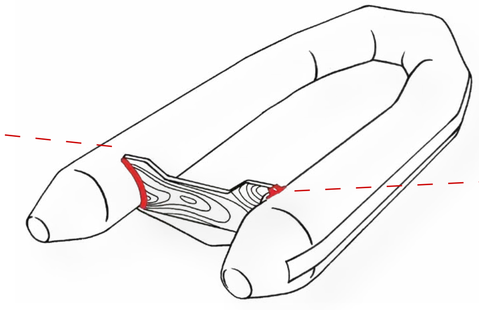

ART. 672

Supporto asse lungo

Item	Part number	Material	Color	Dim. mm	Hole mm
672	A401693N	PVC	nero/black	80x85xh32	22
	A401692N	PVC	grigio/grey	80x85xh32	22
671	A401672N	PVC	grigio/grey	540x100xh47	25,6
695	B184000N	PP	nero/black	223x84x5.5mm	/
	B184001N	PP	grigio/grey	223x84x5.5mm	/
696	B184010N	PP	nero/black	308x104x5.5mm	/
	B184011N	PP	grigio/grey	308x104x5.5mm	/
697	B184020N	PP	nero/black	300x209x7.5mm	/
	B184021N	PP	grigio/grey	300x209x7.5mm	/
698	B184030N	PP	nero/black	430x324x6.6mm	/
	B184031N	PP	grigio/grey	430x324x6.6mm	/

ART. 695

ART. 695

ART. 695

ART. 695

SCARICHI D'ACQUA PER BARCHE

Sono dispositivi inseriti in un foro sul fondo di un'imbarcazione per consentire il deflusso dell'acqua. Si tratta di un componente fondamentale di un'imbarcazione, che impedisce che si riempia d'acqua e affondi.

ART. 612

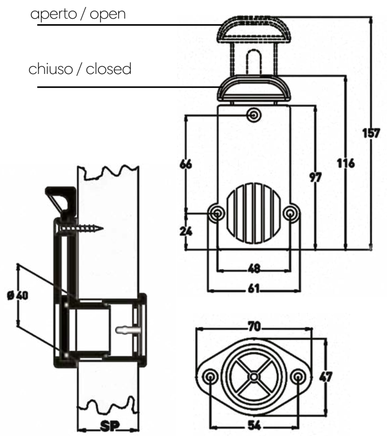

ART. 311

Tappo di svuotamento Ø37

Item	Part number	Material	Color	Model	Axis thickness
612	A403612	Nylon	grigio/grey	19/26	19 ÷ 26 mm
	A403613	Nylon	grigio/grey	25/39	25 ÷ 39 mm
	A403625	Nylon	grigio/grey	38/63	38 ÷ 63 mm
311	A401311N	Nylon	nero/black	/	/

ART. 615

Coni in PVC e gomma per gommoni e tender.

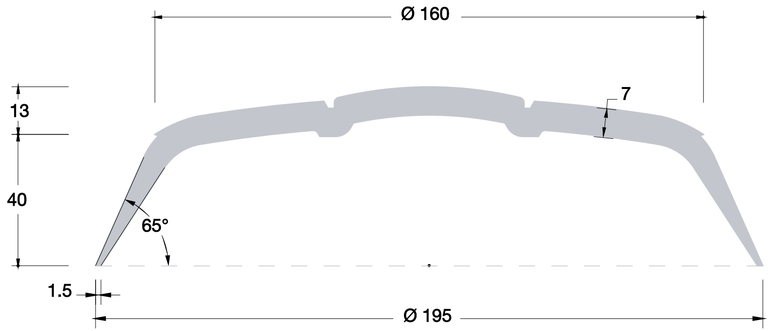

Item	Part number	Material	Color
615	A508001N	PVC	nero/black
	A401611N	PVC	grigio/grey
	A901613N	gomma/ rubber	grigio/grey

CENTRE FIN / FIN BASE

Pinne removibili ideali per SUP gonfiabili, e consentono un facile trasporto e di stoccaggio.

CENTER FIN REMOVABLE BIG

REMOVABLE FIN SMALL

SIDE FIN SMALL

SIDE FIN BIG

CENTER FIN BASE BIG

FIN BASE SMALL

Item	Part number	Material	Color	Size
CENTER FIN BASE BIG	A401800N	ABS	nero/black	100 x 280 mm
CENTER FIN REMOVABLE BIG	A401801N	PA6 + 30% FIBERGLASS	nero/black	depth 220 mm
REMOVABLE FIN SMALL	A401803N	PA6 + 30% FIBERGLASS	nero/black	depth 140 mm
SIDE FIN SMALL	A401806N	PVC	nero/black	base 53 x 215 mm depth 75 mm
SIDE FIN BIG	A401807N	PVC	nero/black	base 55 x 195 mm depth 120 mm

ON DEMAND, ONLY

Item	Part number	Material	Color	Size
FIN BASE SMALL	A401802N	PVC / ABS	nero/black	75 x 200 mm

SALVAGENTE PROFESSIONALE

Attraverso la superficie particolarmente liscia e la speciale conformazione facilitano il traino del salvagente fino alla persona da soccorrere.
Il colore rosso consente un'ottima visibilità anche in condizioni atmosferiche avverse. La corda è saldamente fissata al corpo in modo da garantire la massima sicurezza

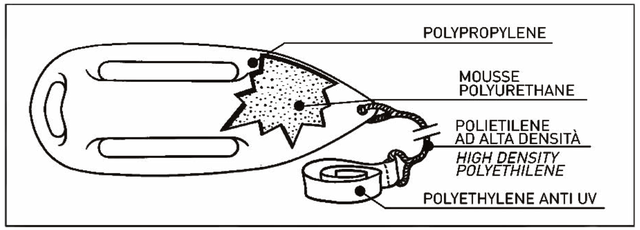



Item	Part number	Material	Color	Weight	Dimensions
Baywatch	6400300	PP / PE / PU	arancione / organge	1,2 kg	68 x 13 x 23 cm

ACCESSORI VARI

Accessori per il mondo nautico.

ART. 242



Anello lancia cima

ART. 300

Maniglia

ART. 210

Valvola piscina

ART. 634

Codolo obliquo

ART. 639

Asta

Item	Part number	Material	Color	Dim. mm	Hole mm
242	A251242N	Expanded PVC	rosso/red	Immagine/Image	Ø100
300	A151300	PVC	nero/black	200 x 90 x h42	/
210	A101210	PVC	nero/black	61x h15	Ø29
634	A401634	PVC	nero/black	104 x 68 x h30	/
639	A401639N	Nylon	nero/black	265	/

ACCESSORI VARI

Accessori per il mondo nautico.

ART. 199



ART. 404

ART. 403

Item	Part number	Material	Color	Dimm. mm	Hole mm
199	A401500	Nylon	bianco/white	35x33xh15	Ø4
404	A201404	PVC	nero/black	Ø39-h16	Ø10
403	A201403	PVC	nero/black	Ø60-h19	Ø12
	A203403	PU	nero/black	Ø60-h19	Ø12

06. RICAMBI

- RACCORDI E TUBI
- VALVOLE E COMPONENTI
- ALIMENTAZIONE E BORSE

RACCORDI VALVOLA

SP 47	SP 712
R151047	R151048

Art. 711 / Art. 712
Raccordi valvola per gonfiatori a pedale e a mano

SP Z011
R210014

Kit raccordi a baionetta

RH0S0046

Kit raccordi valvola per TUBOMAX

SP 120
R551120

Art. 734
Raccordo per valvola BRAVO 2000

SP 118
R151062

Art. 718
Raccordo a baionetta per valvole BRAVO 2001/ BRAVO 2004/HR

SP 138	SP Z023
R151064	R210031

Art. 718/ADJ
Raccordo universale a baionetta
Versione ad incastro / Versione collegabile

SP 139
R151065

Art. 718/2005
Raccordo a baionetta per valvola BRAVO 2005

SP Z003
R151066

Art. 718/HRK
Raccordo a baionetta per valvole H3

SP Z022
R210030

Art. 718/2005-HR-HRK
Raccordo a baionetta per valvole BRAVO 2005/HR/HRK
Versione collegabile

SP 143
R151068

Art. 718/HR
Raccordo a baionetta per valvole BRAVO 2014/HR/SUPER VALVE

SP Z135
R151136

Riduttore ø 40-25 mm
con uscita baionetta

SP 15	SP 16
R151015	R151016

Raccordo triplo ø 20 mm / ø 25 mm

TUBI E RACCORDI

SP Z184
R333370

Dimensioni - *dimensions*:
1,25 m x Ø 20 mm - EPDM

Gonfiatori - *Pumps*:
GE BP-1 / GE 22 RC

Tubo/Hose GE BTP-2
RH0S0024

Dimensioni - *dimensions*:
1,25 m x Ø 20 mm - EPDM

Gonfiatori - *Pumps*:
GE BTP-1 / GE BTP-2

SP 218
R151035

Dimensioni - *dimensions*:
1,25 m x Ø 20 mm - EPDM

Gonfiatori - *Pumps*:
GE 20-2 / GE 25 / GE 21-1A

SP 217
R151052

Dimensioni - *dimensions*:
1,5 m x Ø 25 mm (PU)

Gonfiatori - *Pumps*:
OV 10 / OV 6 / GE 2000 - A.R.S. (standard fitting) / GE 900 - A.R.S.

SP Z185
R811116N

Dimensioni - *dimensions*:
1,5 m x Ø 25 mm (PVC)

Gonfiatori - *Pumps*:
OV4 con connettori standard / *OV4 with standard connector*

SP Z009
R210012

Dimensioni - *dimensions*:
1,25 m x Ø 21 mm (PVC)

Gonfiatori - *Pumps*:
BRAVO 100 / BRAVO 100 D

SP Z050
R210050

Dimensioni - *dimensions*:
1,7 m x Ø 21 mm - PVC

Gonfiatori - *Pumps*:
GE 230/800 - GE 230/1000

SP Z188
R990047

Dimensioni - dimensions:
1,25 m x Ø 20 mm - EPDM

Gonfiatori - Pumps:
GE BP-1 / GE 22 RC

SP Z189
R990048

Dimensioni - dimensions:
1,25 m x Ø 20 mm - EPDM

Gonfiatori - Pumps:
GE BTP-1 / GE BTP-2

SP Z190
R990049

Dimensioni - dimensions:
1,25 m x Ø 20 mm - EPDM

Gonfiatori - Pumps:
GE20-2 / GE 21-1A / GE25

SP Z094
R990023

Dimensioni - dimensions:
1,25 m x Ø 20 mm - EPDM

Gonfiatori - Pumps:
GE BP / BP 12 / GE BTP / BTP 12 / GE BTP-1

SP 214/NEW
R151025

Dimensioni - dimensions:
2,8 m x Ø 25 mm - PU

Gonfiatori - Pumps:
TURBO MAX (> 2011)

SP 212 S
R151017N

Dimensioni - *dimensions*:
1,25 m x Ø 20 mm - LDPE+EVA

Gonfiatori - *Pumps*:
GM 4 / BRAVO 4 SH

SP 212 SUP
R151022N

Dimensioni - *dimensions*:
1,25 m x Ø 20 mm - LDPE+EVA

Gonfiatori - *Pumps*:
BRAVO SUP / SUP HP / SUP-3

SP 212 S3-K
R151027N

Dimensioni - *dimensions*:
1,25 m x Ø 20 mm - LDPE+EVA

Gonfiatori - *Pumps*:
BRAVO SUP / SUP HP / SUP-3

SP 212 B
R151020N

Dimensioni - *dimensions*:
1,25 m x Ø 20 mm - LDPE+EVA

Gonfiatori - *Pumps*:
GM 4 ALU R.E.D

SP 212 BK
R151021N

Dimensioni - *dimensions*:
1,25 m x Ø 20 mm - LDPE+EVA

Gonfiatori - *Pumps*:
GM 4 ALU R.E.D. KITE

SP 235
R151051

Dimensioni - *dimensions*:
1,25 m x Ø 21 mm (PVC)

Gonfiatori - *Pumps*:
BRAVO 101 / BRAVO 110 / GM 5 / GM NX / GM NXS / GM 6 / GM 4 XS / GM 4 WD / GM 110 MIL

SP 13
R151013

Dimensioni - *dimensions*:
1,6 m x Ø 16 mm - PVC

Gonfiatori - *Pumps*:
BRAVO 6 / BRAVO 6M / BRAVO 6 MIL / BRAVO 12

SP 14
R151014

Dimensioni - *dimensions*:
1,7 m x Ø 21 mm - PVC

Gonfiatori - *Pumps*:
BRAVO 1 / BRAVO 2

SP Z180
R151087

Dimensioni - *dimensions*:
1,7 m x Ø 21 mm - PVC

Gonfiatori - *Pumps*:
BRAVO 10 / GP 10

SP Z141
R151078

Dimensioni - *dimensions*:
1,7 m x Ø 21 mm - PVC

Gonfiatori - *Pumps*:
GP 5

SP 213
R151018

Dimensioni - *dimensions*:
1,7 m x Ø 21 mm - PVC

Gonfiatori - *Pumps*:
BST 800 / BST 800 BATTERY / BST 300 / GE 10-3 / GE 10-8 / GE 10-B

RH0S0050

Dimensioni - *dimensions*:
1,5 m x Ø 25 mm - PU

Gonfiatori - *Pumps*:
GE 900 serie

TUBI E RACCORDI

SP 215
R151030

Dimensioni - *dimensions*:
1,5 m x Ø 25 mm - PU

Gonfiatori - *Pumps*:
OV10 / OV6 / GE2000 - A.R.S. (adapter 718/2005 glued in) / GE 900 - A.R.S.

SP Z006
R151131

SP Z006 - 1,5 m x Ø 40 mm - PVC

Gonfiatori - *Pumps*:
OV10-40 / GE 900 / GE 900 ARS / GE 230/2000 / GE 120-230/2000 + A.R.S.

EPDM hoes
RH0S0030

Tubo EPDM -260HV / *EDPM hoes-260HV.*
- 1,5 m x Ø 40 m -

Gonfiatori - *Pumps*:
PCS / GE2000/65 / GE 1800 ROMA / GE 1800 EL

EPDM hose
RH0S0040

Tubo / *hoes* 260HV
1,5 m x Ø 40 m - EPDM

Gonfiatori - *Pumps*:
PCS / GE2000/65 / GE 1800 ROMA / GE 1800 EL

PVC hose
RH0S0052

Tubo / *hoes* 260HV
1,5 m x Ø 40 m - PVC

Gonfiatori - *Pumps*:
GE 1800 ROMA / GE 1800 EL

SP Z126
R151133

SP Z126 – 1,5 m x Ø 40 mm - EPDM

Gonfiatori - *Pumps*:
OV10-40 / GE 900 / GE 900 ARS / GE 230/2000 / GE 120-230/2000 + A.R.S.

SP Z036
R211007

Art. 810
Tubo 25 m x Ø21 mm - PVC

SP Z031
R211002

Bobina da 25 m / Ø25 mm - PU

Gonfiatori - *Pumps*:
TURBOMAX

SP Z032
R211003

Art. 850
Tubo 15 m x Ø 40 mm - EPDM

SP Z025
R210033

Art. 741 - Raccordo Tubo-Pompa per BRAVO 2000/ BRAVO 2000 ARS /OV 10/OV 6 - ø 25 mm

SP Z024
R210032

Art. 741 - Raccordo Tubo-Pompa per BRAVO 2000/ BRAVO 2000 ARS /OV 10/OV 6 - ø 40 mm

SP Z027
R210035



Art. 760
Raccordo per valvola 260 H.V.

TUBI E RACCORDI

SP Z134
R151134

Raccordo a Y tubo-pompa

SP Z013
R210017

Raccordo Tubo-Pompa per PCS/BRAVO 2000 IP65/ BRAVO2000ARSIP65-ø40mm

SP Z014
R210018

Raccordo Tubo-Pompa per PCS/BRAVO 2000 IP65/ BRAVO2000ARSIP65-ø25mm

SP 46
R151046

Raccordo Tubo-Pompa per BRAVO 1/BRAVO 2/BRAVO 10

SP Z026
R210034

Art. 795 – Riduzione in PVC Tubo-Raccordo - ø 25/20 mm
Per bobine o tubi ø25mm

SP Z115
R210053

Raccordo di sgonfiaggio da inserire sul fondo.
Per GE 230/1000

SP 20
R201020

Gancio di chiusura per GP 10

SP 157
R151024N

Raccordo per tubo di controllo pressione e valvola di gonfiaggio (BRAVO 2005/H3)

SP 156
R151023N

Raccordo per tubo di controllo pressione e valvola di gonfiaggio (HR)

SP Z034
R211005



Art. 866 – Tubo per controllo pressione 15 m/ø 6 mm - PU

SP 216
R151032

Connettore arancione a baionetta per TURBO MAX

SP Z125
R151050



Custodia per BST 800 BATT e GE 10-B

KIT E ACCESSORI PER GONFIABILI E GOMMONI

SP 55	SP 17
R101065	R101017

Kit colla (gr.5) e foglia PVC / Collante professionale per PVC (gr.28)

SP 50
R101060

Kit ricambi/riparazione:
1 tappo per valvola a vite
2 tappi piccoli
2 tappi medi
1 raccordo per gonfiator
1 foglia PVC
1 tubo di colla (5 gr)

SP 75/B
R601075

Tappo di svuotamento + BASE - nero

SP 103
R601076

Tappo di svuotamento (solo plug - nero

SP 75/G
R601080

Tappo di svuotamento + BASE - grigio

SP 43
R201043

SP 129/2005/G	SP 129/2005/B
R601148	R601147

Valvola di gonfiaggio
BRAVO 2005 - grigio / nero

PCS: 6

SP 129/2001/G	SP 129/2001/B
R601130	R601129

Valvola di gonfiaggio
BRAVO 2001 - grigio / nero

PCS: 6

SP 129/2000/G	SP 129/2000/B
R601146	R601145

Valvola di gonfiaggio
BRAVO 2000 - grigio / nero

PCS: 6

SP Z183
R801374

Chiave per valvola BRAVO 260 H.V.

SP Z182
R801372

Chiave per valvole
VA 28 0/ VA 30 / VA 50 / VA 285

SP 136
R601141

Chiave per BRAVO 2000 / BRAVO 2001 / BRAVO 2004 / BRAVO 2005 / BRAVO 2014 / SUPER VALVE/VA 100

ALIMENTAZIONE PER GONFIATORI

SP 21
R210021

Batteria per GE20-2, GE21-1A e GE25SL, GE 10-B

Battery for GE20-2, GE21-1A and GE25SL, GE 10-B

SP Z136
R990055

Caricabatterie per batterie GE25 HP (prima del 2023) e KIT HP

SP #33
R990033

Caricabatterie per GE 10-B, GE20-2, GE25 SL e KIT SL

SP #35
R990035

Caricabatteria per BST 800 BATT / BRAVO 12 BATT

SP #36
R990036

Caricabatterie per GE21-1A

SP 221
R151038

Spina accendisigari 12V: GE20-2 e GE25

SP 228
R151034

Spina accendisigari 12V: - BST 800 BATT e BRAVO12 BATT

SP Z051
R210051

Spina accendisigari 12V per GE21-1A

SP Z093
R990022



Morsetti per GE20-2 (K6130702), BP12 (K6131300) e BTP12 (K6131200)

SP Z155
R990068

Cavo 0,5 m con accendisigari per BST 300 / 800 / GE BP-1/ BTP-1 / 10-8 / 10-3

WL0S0023

Cavo di alimentazione con coccodrilli per BTP-2 MiMa

SP Z166
R401159

Connettori per KIT TURBO MAX

SP Z157
R990070

Cavo di alimentazione con accendisigari per GE BP-1/BTP-1
(Per impianti con corrente massima erogabile di 20 A)

SP Z149
R990062

Clip per GE BP-1, KIT batterie, GE BTP serie

BORSE E BATTERIA

SP 225
R151042

TURBO MAX

SP 227
R151044

GE 20-2

SP Z002
R151045

GE 21-1A

SP Z140
R151077

GE 25 / GE 22 CAPRI

SP 222
R151039

BST 800 BATTERY / GE 10-B

SP 230
R151069

BST 300 / BST 800 / GE 10-3 / GE 10-8

SP Z138
R151074

GE BP / GE BP-1

SP Z139
R151075

GE BTP-1 / GE BTP-2

SP Z028
R210036

Sacca per pompe a mano

Transport mesh bag for hand pumps

RICAMBI PER ACCESSORI SUP

SP 105	SP Z040	SP 106	SP 209	SP 211	SP Z158
R251010N	R212003	R251012	R151029N	R151033N	R605100N
Ghiera per pagaie SUP	Guaina in NBR per pagaie SUP	Bottone per pagaie SUP	O-ring per pompa BRAVO SUP / BRAVO SUP-3		Raccordo per sgonfiaggio sicuro

07. | AEDRA - Luxury Watersports

- PANORAMICA
- GONFIATORI ELETTRICI
- SUP KIT

PANORAMICA

AEDRA Luxury Watersports è un brand che fa parte del gruppo **Scoprega S.p.a.** e nasce dall'esigenza di **offrire una gamma di soluzioni di altissima qualità**, adattandosi alle mutevoli esigenze del mercato e anticipando le tendenze.

AEDRA rappresenta **prodotti di alta gamma come Jetboard, SUP e gonfiatori elettrici di ultima generazione.** Il nostro obiettivo è chiaro: posizionarci come uno dei marchi più contemporanei, innovativi ed eleganti nel mondo della nautica e degli sport acquatici.

La visione di AEDRA si concentra sulla **reinterpretazione dell'esperienza.**

AEDRA è il luogo in cui l'acqua va oltre l'ordinario e il **lusso diventa uno stile di vita.** È un'esplorazione di un ecosistema acquatico esperienziale progettato per offrire il massimo divertimento. Immergetevi nel massimo della soddisfazione e ridefinite il vostro modo di vivere l'acqua.

AEDRA

MAXXIVE

Il gonfiatore è compatto, facile da usare ed elegante.

È fatto su misura per le imbarcazioni con sistema di gonfiaggio integrato.

Il MAXXIVE offre prestazioni eccellenti e la possibilità di controllo automatico della pressione (A.R.S.) con un basso livello di rumore.

Touchscreen display

Accessori inclusi

Kit di connettori per collegamento elettrico

Tubo Ø 21 mm

Adattatori valvola

LARGE BOATS SMALL BOATS

MANUALE D'USO

Item	Part number	Max. Pressure	Max air flow	Voltage	Max. Current	Weight
MAXXIVE 12V	AD2S0001	240 mbar (3.5 psi)	700 l/m	9 ÷16 Vdc	45-60 A	1.45 kg
MAXXIVE 24V	AD2S0005	240 mbar (3.5 psi)	700 l/m	18 ÷ 32 Vdc	23-30 A	1.45 kg

FUNZIONI

Gonfia e sgonfia

INFO & DETTAGLI PRODOTTO

Vai al sito

INFINITE

Il gonfiatore si distingue per le sue elevate prestazioni (1.2 bar e 500 l/min di volume iniziale) e la capacità di gonfiare e sgonfiare un'ampia gamma di oggetti, tra cui kite, SUP, piccoli gommoni, materassini, ecc...

Con un touch-screen integrato per un controllo intuitivo e un livello di rumorosità molto basso, garantisce un'esperienza facile, veloce e tranquilla.

Touchscreen display

Accessori inclusi

Tubo Ø 21 mm

Adattatori valvola

Connettore cavo elettrico

SUP | PLATFORM | KITES | KAYAK | LARGE BOATS | SMALL BOATS

MANUALE D'USO

Item	Part number	Max. Pressure	Max air flow	Voltage	Max. Current	Weight
INFINITE 12V	AD2S0006	1,25 bar (18,1 psi)	500 l/m - 150 l/m	9 ÷16 Vdc	45-60 A	2.15 kg
INFINITE 24V	AD2S0007	1,25 bar (18,1 psi)	500 l/m - 150 l/m	18 ÷ 32 Vdc	23-30 A	2.65 kg

FUNZIONI

Gonfia e sgonfia

INFO & DETTAGLI PRODOTTO

Vai al sito

ESSENTIAL SUP KIT

L'AEDRA ESSENTIAL KIT è attualmente l'unico in grado di garantire il comfort di trasporto unito alla compattezza e alla leggerezza.
Ogni oggetto è riposto e posizionato in modo tale che il peso sia meno percepibile e il comfort sia assicurato.
L'ESSENTIAL KIT è composto dalla tavola SUP, da un zaino resistente e compatto, dalla pagaia in fibra di carbonio e dalla pompa a mano.
Come optional all'interno del kit, in sostituzione alla pompa a mano, è possibile avere il gonfiatore elettrico GE 22 CAPRI.

SUP - Dropstitch with EVA

Pagaia

Zaino leggero e compatto

Supuer F - Gonfiatore manuale

GE 22 CAPRI - optional

MANUALE D'USO

Item	Part number
ESSENTIAL SUP KIT	EIS5101

KIT 4 KIDS

Il KIT 4 KIDS è il kit ideale per tutti i giovani che vogliono imparare a praticare il SUP.
La pratica e leggera tavola consente a tutti di effettuare le virate in totale sicurezza e velocità, mentre l'ampia pedana offre lo spazio su cui i giovani possono distendersi.
Il KIT risulta pratico e comodo per il trasporto grazie alla comoda borsa.
Al suo interno oltre alla tavola SUP si trovano la pagaia in fibra di vetro e la pompa a mano per il gonfiaggio.

SUP - Dropstitch with EVA

Pagaia

Borsa per il trasporto

Supuer F - Gonfiatore manuale

MANUALE D'USO

Item	Part number
KIT 4 KIDS - SUP KIT	EIS5301

INFO AZIENDA

- RIVENDITORI & DISTRIBUTORI
- ASSISTENZA TECNICA
- COMMERCIALE

RIVENDITORI & DISTRIBUTORI

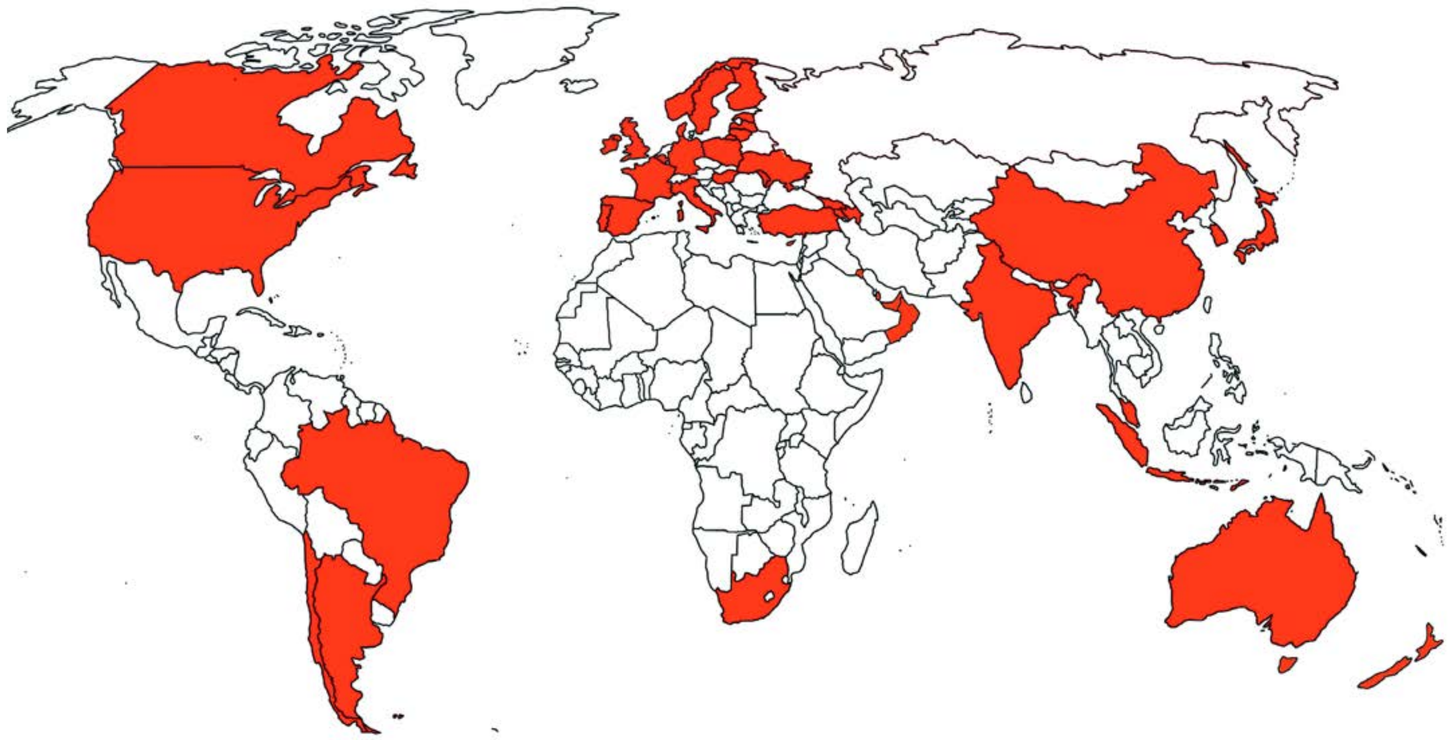

Attraverso la nostra rete di distributori e centri assistenza specializzati e qualificati, Scoprega offre l'attenzione e la cura necessaria perchè il vostro prodotto sia sempre performante. Presso i nostri centri assistenza troverete sempre a vostra disposizione professionalità e competenza. Vedi **QUI** la lista completa

ASSISTENZA TECNICA

Scoprega, su tutti i prodotti, grazie ai diversi centri collocati in Europa e in America, offre assistenza tecnica a livello internazionale.

In caso di acquisto di un prodotto, e di un riscontro di difetto di conformità durante il periodo di Garanzia Legale, ogni centro assistenza sarà in grado di aiutarla, sia per la riparazione di un prodotto che per una richiesta di supporto.

Il personale tecnico è certificato da Scoprega e utilizza parti di ricambio originali per tutte le riparazioni.

Area	Riparatore autorizzato	Indirizzo	Contatto
Europa	Scoprega S.p.A.	Via L. da Vinci 63 - 20062, Cassano D'Adda (MI) - Italy	customercare@scoprega.it
Repubblica Ceca	VODAK SPORT S.R.O.	BRATISLAVSKA 31, 60200, BRNO - Czech Republic	info@vodak-sport.cz
USA	PROKITESURF LLC	104 Cox Dr., 78374 Portland, Texas - USA	info@pksdistribution.com
Canada	North West Marine Distributors Ltd	26940 26TH AVENUE, ALDERGROVE, BC V4W 4A4 - CANADA	+1 604-607-7901
Canada	Auto Marine Specialties Ltd	4718 - 1 STREET SW, CALGARY, AB SW T2G 0A2 - CANADA	+1 (403) 287-2120

CONTATTI COMMERCIALI

La gestione dei contatti all'interno di un business permette di mantenere relazioni solide con i clienti, i fornitori e i partner.

Gestire a questi contatti ci è permesso anche di comprendere le esigenze e le preferenze dei nostri consumatori, garantendo un servizio personalizzato e una migliore fidelizzazione.

Questo mantenimento di relazioni positive con i nostri fornitori contribuisce a garantire l'approvvigionamento costante e mantenere alta la qualità dei prodotti o servizi che offriamo.

A lato i **riferimenti commerciali** di Scoprega S.p.A., con le relative **aree commerciali.**

CRISTINA BRUSAMOLINO brusamolino@scoprega.it

Sales Area Manager

Algeria, Argentina, Belgio, Brasile, Bulgaria, Cile, Colombia, Costa Rica, Danimarca, Finlandia, Francia, Hong Kong, Indonesia, Isola, Malesia, Mauritius, Messico, Marocco, Panama, Portogallo, Porto Rico, Singapore, Sudafrica, Corea del Sud, Spagna, Taiwan, Tailandia, Tunisia, Venezuela, Vietnam

VALENTINA FACCHINETTI facchinetti@scoprega.it

Sales Area Manager

Australia, Canada, Croazia, Cipro, Egitto, Estonia, Grecia, Ungheria, India, Irlanda, Israele, Italia, Giappone, Kuwait, Lettonia, Lituania, Macedonia, Malta, Montenegro, Nuova Caledonia, Nuova Zelanda, Norvegia, Oman, Qatar, Romania, Serbia, Slovacchia, Slovenia, Sri Lanka, Svezia, Svizzera, Turchia, UAE, Uganda, Ucraina.

DELIA BASSANINI bassanini@scoprega.it

Sales Area Manager

Austria, Repubblica Ceca, Germania, Paesi Bassi, Polonia, Regno Unito, USA

INTERNATIONAL VERSION OF THE CATALOGUE

INDEX

01. INTRO

- WHO WE ARE/WHAT WE DO
- APPLICATIONS
- CERTIFICATIONS & WARRANTY

02. INFLATORS

- OVERVIEW
- 12V/24V ELECTRIC INFLATORS
- ELECTRIC INFLATORS 120V/230V
- MANUAL INFLATORS
- FOOT PEDAL INFLATORS

03. SISTEMS

- Air10 Pro
- OKTOPLUS
- Manifold

03. OARS & PADDLE

- OVERVIEW
- OARS
- PADDLES

04. VALVES

- OVERVIEW
- VALVES
- FITTINGS

05. ACCESSORIES

- MANOMETRE
- NAUTICAL COMPONENTS

06. SPARE PARTS

- FITTINGS AND PIPES
- VALVES AND COMPONENTS
- POWER SUPPLY AND BAGS

08. AERA

- PANORAMICA
- GONFIATORI ELETTRICI
- SUP KIT

WHO WE ARE

Since **1979** Scoprega has been designing, **manufacturing and marketing products and accessories for the Nautical and Water Sports sector worldwide**, constantly investing in new technologies and always with care and respect for the environment.

Made in Italy by Scoprega has always been characterised by **high technology, refined design, reliable performance** and a lot of passion for what we do.

Our motto, 'Look beyond', represents Scoprega's vision: **to look beyond, aiming at the constant improvement of our products** and their production techniques.

Optimisation of the production process is complemented by the principles of eco-sustainability and that is why we are moving in the direction of energy saving and the **increasing use of recycled material with low emissions.**

CERTIFICATIONS & WARRANTY

The Scoprega S.p.A. group sets its activities according to certain criteria laid down by the various regulations, ensuring that our customers achieve a certain level of quality and, above all, that it is maintained over time, and this is very important.
Working day after day within these quality standards is not easy, but it is a constant reminder for us to act more and more efficiently.

CRIBIS - Prime Company:
the recognition of the highest commercial reliability The recognition is based on the CRIBIS Rating, a dynamic and constantly updated indicator of the reliability of the company Sales Leader.

ISO 9001:
This is an international standard certification applicable by all organisations, operating in any business sector, based on the eight quality management principles, all of which are indispensable for good business conduct.

GPSR:
All products manufactured by the Scoprega Group comply with the approved European Regulation 2023/988 on General Product Safety.

WARRANTY - 2 Years:
Each product made by the Scoprega Group is protected for 2 years from the original date of purchase.

WHAT WE DO

We are one of the **world's leading manufacturers of electric, hand and foot-powered inflators, oars and paddles, inflating valves and boating accessories.**

Continuous technical research becomes the starting point on which all products are developed and designed, accompanied by an in-depth study of the **most suitable materials** for the final application.

The aim is to **combine design, efficiency, reliability and performance in user-friendly products.**

In addition to **Marine** and **Watersport**, our products are in high demand and appreciated in **Military** and **First Aid** applications, and **customer satisfaction is essential** for the implementation of product development or renewal programmes.

APPLICATIONS

SUP

PLATFORM

KITES

CANOE

SMALL BOATS

BIG BOATS

FENDERS

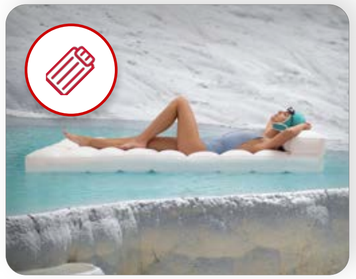

MATTRESS

TOYS

BIG STRUCTURE

TENTS

BARRIERS

Thanks to their performance and technical features, our products are able to cover the most diverse applications on the market.

On each inflator page and **in the respective manuals you will find icons to indicate the various uses of the product.**

02. | INFLATORS

- OVERVIEW.
- 12V/24V ELECTRIC INFLATORS
- ELECTRIC INFLATORS 120V/230V
- MANUAL INFLATORS
- FOOT OPERATED INFLATORS

OVERVIEW

In the **1990s,** Scoprega began manufacturing electric inflators, further expanding its product range, and today **electric inflators are the core business.**

Our electric inflators are **recognized worldwide as extremely reliable and high-performance products.** The aim is to combine design, efficiency, reliability and performance in user-friendly products.

Particularly successful, our electric inflators for **SUP** and **KITE boast the best performance on the market** in terms of absolute inflation times.

In our range of electric inflators, you can find the **ideal solution for all applications in various industries.** In addition to **Marine** and **Watersport**, our products are highly demanded and appreciated in **Military** and **First Aid applications.**

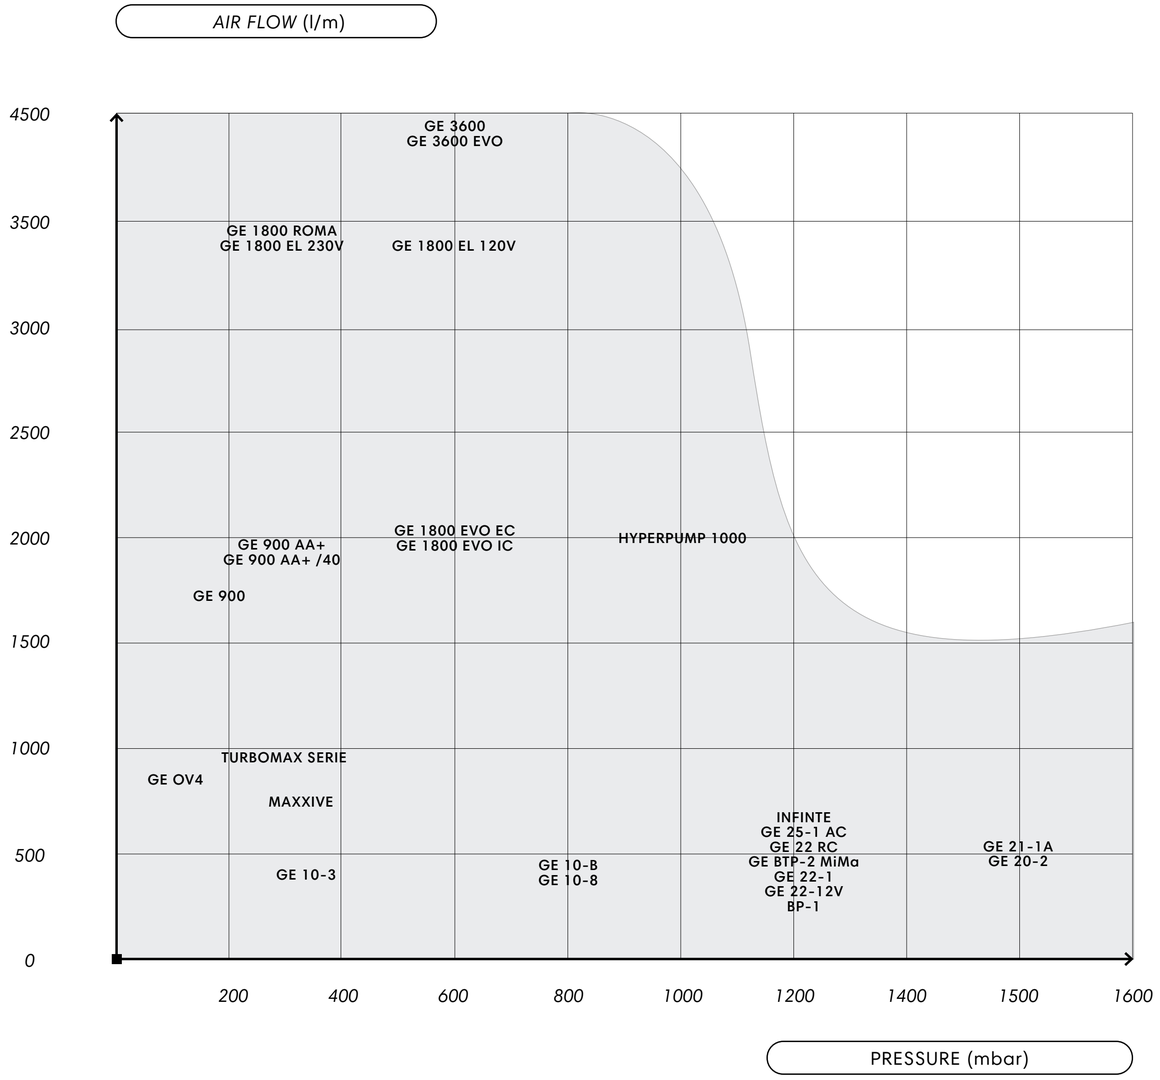

PRESSURE / AIR FLOW

Pressure	Air flow	12V - 24V	120V - 230V
High pressure (higher than 500 mbar)	Low flow rate (less than 500 l/m)	GE BP-1 GE 20-2 GE BTP-2	GE 25-1 AC
	Medium flow rate (between 500 and 1000 l/m)	GE 22 RC GE 22 CAPRI GE 22-12V GE 24 INFINITE	
	High flow rate (higher than 1000 l/m)		1800 EL 120V 1800 EVO 3600 3600 EVO HYPERPUMP 1000
Medium pressure (between 300 and 500 mbar)	Low flow rate (less than 500 l/m)	GE 10-3 GE 10-8 GE 10-B	
	High flow rate (higher than 1000 l/m)		1800 EL 230V 1800 ROMA
Low pressure (less than 300 mbar)	Medium flow rate (between 500 and 1000 l/m)	MAXXIVE	
	High flow rate (higher than 1000 l/m)	TURBOMAX TURBOMAX KIT	GE OV4 GE 900 GE 900 AA+ GE 900 AA+/40

OVERVIEW

Group	Item	Part number	Voltage	Max. pressure	Max. flow rate	Automatic refilling control	Fittings	Inflations hose
GE 25	GE 25-1 AC	GE3S0009	230 Vac (50 hz)	1,2 bar (17.4 psi)	450 - 250 l/m	NO	YES	1,25 m - Ø 21 mm - EPDM
GE 22	GE 22 RC 12V	GE3S0008	9 ÷16 Vdc	1,25 bar (18,1 psi)	550 - 250 l/m	NO	YES	1,25 m - Ø 21 mm - EPDM
	GE 22 RC 24V	AVAILABLE	18 ÷ 32 Vdc	1,25 bar (18,1 psi)	550 - 250 l/m	NO	YES	1,25 m - Ø 21 mm - EPDM
	GE 22-1	GE3S0019	110/230 V	1,25 bar (18,1 psi)	500-125 l/m	NO	YES	1,25 m - Ø 21 mm - EPDM
	GE 22 - 12V	GE3S0003	9 ÷16 Vdc	1,25 bar (18,1 psi)	500-125 l/m	NO	YES	1,25 m - Ø 21 mm - EPDM
GE 20-2	GE 20-2	K6130702	110/230 V	1,5 bar (22 psi)	125 l/m	NO	YES	1,25 m - Ø 21 mm - EPDM
GE BP-1	GE BP-1	K6131320	12 Vdc	1,2 bar (18 psi)	160 l/min	NO	YES	1,25 m - Ø 21 mm - EPDM
GE BTP-2 MiMa	GE BTP-2 MiMa	GE3S0004	12 Vdc	1,2 bar (18 psi)	420 - 120 l/m	NO	YES	1,25 m - Ø 21 mm - EPDM
GE 10	GE 10-3	K6131800	9 ÷16 Vdc	300 mbar (4.5 psi)	450 l/m	NO	YES	1,70 m - Ø 21 mm - PVC
	GE 10-8	K6131830	9 ÷16 Vdc	800 mbar (11.6 psi)	450 l/m	NO	YES	1,70 m - Ø 21 mm - PVC
	GE 10-B	K6131860	110/230 V	800 mbar (11.6 psi)	450 l/m	NO	YES	1,70 m - Ø 21 mm - PVC
TURBOMAX	TURBOMAX 12 V	GE4S0008	9 ÷16 Vdc	250 mbar (3.6 psi)	1000 l/m	NO	YES	2,80 m - Ø 25 mm - PU
	TURBOMAX 24 V	GE4S0010	18 ÷ 32 Vdc	250 mbar (3.6 psi)	1000 l/m	NO	YES	2,80 m - Ø 25 mm - PU
	TURBOMAX KIT 12 V	GE4S0009	9 ÷16 Vdc	250 mbar (3.6 psi)	1000 l/m	NO	YES	ON DEMAND
	TURBOMAX KIT 24 V	GE4S0011	18 ÷ 32 Vdc	250 mbar (3.6 psi)	1000 l/m	NO	YES	ON DEMAND
AEDRA	MAXXIVE 12 V	AD2S0001	9 ÷16 Vdc	240 mbar (3.5 psi)	700 l/min	YES	YES	2,80 m - Ø 21 mm - EPDM
	MAXXIVE 24 V	AD2S0005	18 ÷ 32 Vdc	240 mbar (3.5 psi)	700 l/min	YES	YES	2,80 m - Ø 21 mm - EPDM
	INFINITE 12 V	AD2S0006	9 ÷16 Vdc	1,25 bar (18,1 psi)	500-150 l/m	YES	YES	2,50 m - Ø 21 mm - EPDM
	INFINITE 24 V	AD2S0007	18 ÷ 32 Vdc	1,25 bar (18,1 psi)	500-150 l/m	YES	YES	2,50 m - Ø 21 mm - EPDM

OVERVIEW

Group	Item	Part number	Voltage	Max. pressure	Max. flow rate	Automatic refilling control	Fittings	Inflations hose
HYPERPUMP	HYPERPUMP 1000	GE8S0005	230 Vac (50 hz)	1000 mBar (14.5 psi)	2000 l/m	SI	NO	SU RICHIESTA
GE 3600	GE 3600	GE7S0007	230 Vac (50 hz)	360 mbar (5.2 psi)	4400 l/m	SI	NO	SU RICHIESTA
	GE 3600 EVO	GE8S0003	230 Vac (50 hz)	600 mbar (8.7 psi)	4400 l/m	SI	NO	SU RICHIESTA
GE 1800	GE 1800 ROMA	K6131900	230 Vac (50 hz)	360 ± 30 mbar (5.2 psi)	3400 l/m	SI	NO	SU RICHIESTA
	GE 1800 EL	GE7S0002	120 Vac (60 hz)	600 mbar (8.7 psi)	3400 l/m	NO	SI	1,50 m - Ø 40 mm - PVC
		GE7S0000	230 Vac (50 hz)	360 mbar (5.2 psi)	3400 l/m	NO	SI	1,50 m - Ø 40 mm - PVC
	GE 1800 EVO EC (controllo esterno)	GE7S0012	120 Vac (60 hz)	600 mBar (8.7 psi)	2000 l/m	SI	SI	1,50 m - Ø 40 mm - PVC
		GE7S0006	230 Vac (50 hz)	600 mBar (8.7 psi)	2000 l/m	SI	SI	1,50 m - Ø 40 mm - PVC
	GE 1800 EVO IC (controllo interno)	GE7S0018	120 Vac (60 hz)	600 mBar (8.7 psi)	2000 l/m	SI	SI	1,50 m - Ø 40 mm - PVC
		GE7S0017	230 Vac (50 hz)	600 mBar (8.7 psi)	2000 l/m	SI	SI	1,50 m - Ø 40 mm - PVC
GE 900	GE 900	K6131650	120 Vac (60 hz)	170 mbar (2.5psi)	1700 l/m	NO	SI	1,50 m - Ø 25 mm - PU
		K6131600	230 Vac (50 hz)	170 mbar (2.5psi)	1700 l/m	NO	SI	1,50 m - Ø 25 mm - PU
	GE 900 A.R.S.	GE4S0007	120 Vac (60 hz)	170 mbar (2.5psi)	1700 l/m	NO	SI	1,50 m - Ø 25 mm - PU
		K6131630	230 Vac (50 hz)	170 mbar (2.5psi)	1700 l/m	NO	SI	1,50 m - Ø 25 mm - PU
	GE 900 AA+	GE4S0004	120 Vac (60 hz)	250 mbar (3,6 psi)	1700 l/m	NO	SI	1,50 m - Ø 25 mm - PU
		K6131610	230 Vac (50 hz)	250 mbar (3,6 psi)	1700 l/m	NO	SI	1,50 m - Ø 25 mm - PU
	GE 900 AA+/40	GE4S0005	230 Vac (50 hz)	250 mbar (3,6 psi)	1700 l/m	NO	SI	1,50 m - Ø 40 mm - PVC
GE OV	GE OV4	K6130415	230 Vac (50 hz)	150 mbar (2.2 psi)	950 l/m	NO	SI	1,50 m - Ø 25 mm - PU

OVERVIEW

The inflators are accompanied by a leaflet, on which, through the **QR codes** present, **it will be possible to access all information and documents related to the product.**

User's Manual:

Digital publication via pdf, contains information useful for the correct use of the device.

European Regulatory Regulation of GPSR:

General Product Safety Regulation (GPSR), replaces Directive 2001/95/EC and also incorporates Directive 87/357/EC.

This section provides access to all documentation related to Scoprega products, broken down by product category.

Product Sales Warranty:

All the conditions of permitted and improper ulizzo to be respected in order not to void the warranty on the product are indicated.(Validity of 2 years from the original date of purchase).

Through **this digitization system** for accessing product information, **we have decreased the use of paper, placing a strong emphasis on sustainability.**

Digitization, reskilling and sustainability are some of the **main strategic priorities on which Scoprega S.p.A.** focuses, also to give a strong response to consumers, who are increasingly **showing an interest in environmental impact**.

On request, Scoprega products can get:

CUSTOMIZATION:

At the specific request of customers, Scoprega S.p.A. offers the possibility of customising its products, adapting them to their needs (graphics, colour, logo etc...).

FUNZIONALITÀ WEBSERVER (CONTROLLO REMOTO):

It allows the user to remotely control and monitor the status of the inflatable.
Thanks to this system, it is possible to observe the internal pressure of the inflatable, ensuring that it is always at the optimum level.

Furthermore, if necessary, you can intervene remotely to manage the pressure or inflate/deflate the inflatable quickly and safely.

Scoprega's remote control system represents a major innovation in the inflatable industry, helping to improve safety and control, simplifying the user experience for all users.

N.B. Activation of this system is by specific customer request.

N.B. Only certain models can be equipped with it. Check the information on the dedicated page of the inflator.

GE 25-1 AC

Electric inflator suitable for high-pressure applications (large air flow) and equipped with automatic switching from turbine phase to dual compressor phase.
Highlight the presence of LED indicators for battery life status.

INCLUDED IN THE BOX:

- 1.25 m - Ø 21 mm EPDM hose
- Valve fittings
- Shoulder bag

TEXT PLATFORM KITES KAYAK

USER MANUAL

Item	Part number	Max. Pressure	Max air flow	Charge voltage	Charge current	Weight
GE 25-1 AC	GE3S0009	1,2 bar (18 psi)	450 - 250 l/m	230 Vac (50 hz)	4 A	6 kg

FUNCTIONS

Inflate and deflate

INFO & PRODUCT DETAILS

Go to website

GE 22 RC

The GE 22 RC is a high-efficiency electric inflator synonymous with reliability and functionality. The GE 22 RC is equipped with two powerful motors, allowing it to inflate any object to a pressure of up to 1250 mbar.
The inflator is equipped with a remote control panel that allows full management of the pump, which can be fixed in an area of your choice.

INCLUDED IN THE BOX:

- 5 m connecting hose - Ø 21 mm EPDM
- Inflation hose 1.25 m - Ø 21 mm in EPDM
- Valve fittings
- Control panel
- Template for installation
- Connection cable inflator - control panel (5 m)
- Power cable (5 m)

SUP PIATTAFORME KITES FENDER

USER MANUAL

Item	Part number	Max. Pressure	Max air flow	Voltage	Max. Current	Weight
GE 22 RC 12V	GE3S0008	1,25 bar (18,1 psi)	550-125 l/m	9 ÷ 16 Vdc	4 A	4 kg
GE 22 RC 24V	AVAILABLE	1,25 bar (18,1 psi)	550-125 l/m	18 ÷ 32 Vdc	2 A	4 kg

FUNCTIONS

Inflate and deflate

INFO & PRODUCT DETAILS

Go to website

GE 22-1

The GE 22-1 is the result of extensive research to add, in a high-performance SUP inflator, an additional and essential feature for those who want to enjoy an outdoor experience to the fullest, namely: silence.

Thanks to the completely innovative inflation system, noise has been reduced to less than 75 dB. An extraordinary achievement for an inflator that still reaches 1250 mbar with an initial capacity of 500 l/min. The GE 22-1 is equipped with a lithium-ion (LiFePO4) battery capable of inflating 3 265-liter SUP boards to 1250 mbar on a single charge.

Average inflation time: 6 minutes.

INCLUDED IN THE BOX:

- 1.25 m - EPDM hose Ø 21 mm
- Valve fittings
- Shoulder bag
- Mastervolt battery charger for lithium battery (LiFePO4)

MANUALE D'USO

Item	Part number	Max. Pressure	Max air flow	Charge voltage	Charge current	Weight
GE 22-1	GE3S0019	1,25 bar (18,1 psi)	500-125 l/m	110/230 V	4 A	4 kg

SUP PLATFORM KITES FENDER

FUNCTIONS

Inflate and deflate

INFO & PRODUCT DETAILS

Go to website

GE 22-12V

The GE 22 12V is the battery-free version of the GE 22 CAPRI.

It is a high-performance SUP inflator that has a key feature for those who want to enjoy an outdoor experience to the fullest, namely: silence.

Thanks to the completely innovative inflation system, the noise of this inflator has been reduced to less than 75 dB. This is an extraordinary achievement for an inflator that still reaches 1250 mbar with a capacity of 170 l/min.

Power is supplied via cigar lighter cord.

INCLUDED IN THE BOX:

- 1.25 m - Ø 21 mm EPDM hose
- Valve fittings
- Shoulder bag
- Cable with alligator clips

USER MANUAL

Item	Part number	Max. Pressure	Max air flow	Voltage	Charge current	Weight
GE 22-12V	GE3S0003	1.25 Bar (18.1 psi)	500 - 125 l/min	12 Vac	21 A	3 kg

< 75 dB

SUP KITES KAYAK SMALL BOATS MATTRESS

FUNCTIONS

Inflate and deflate

INFO & PRODUCT DETAILS

Go to website

GE 20-2

Portable electric inflator, high efficiency and low noise with dual piston pumping unit, no relay or microswitch.
Easy to set desired pressure via pressure gauge, automatic shutdown, with LED indicators for battery life status.
It has a built-in 12V DC battery, rechargeable via 110-240 AC/DC transformers, and is equipped with terminals for direct power supply from external 12V batteries. It also features a protective filtering system.

INCLUDED IN THE BOX:

- 1.25 m - Ø 21 mm EPDM hose
- Valve fittings
- Shoulder bag
- Battery charger
- Cable with alligator clips for 12-volt power supply

SUP PLATFORM KITES KAYAK

USER MANUAL

Item	Part number	Max. Pressure	Max air flow	Charge voltage	Charge current	Weight
GE 20-2	K6130702	1,5 bar (22.0 psi)	125 l/m	110/230 V	2 A	6,4 kg

FUNCTIONS

Inflate

INFO & PRODUCT DETAILS

Go to website

GE 24

The GE 24 is a lightweight, sturdy and compact inflator perfect for toys, airbeds and other small inflatables, ideal for those who want to inflate quickly and safely.
It can reach a maximum of 150 mbar of pressure (at which it automatically stops) with a flow rate of up to 600 l/min.
It can inflate and deflate through the two ports dedicated to different operations. It has a built-in battery of remarkable efficiency.

INCLUDED IN THE BOX:

- 1.25 m - Ø 21 mm EPDM hose
- Valve fittings
- Shoulder bag
- Battery charger

TOYS

AIR MATTRESS

USER MANUAL

Item	Part number	Max. Pressure	Max air flow	Charge voltage	Charge current	Weight
GE 24	GE1S0004	150 mbar (2.2 psi)	600 l/m	110/230 V	3 A	5,8 kg

FUNCTIONS

Inflate

INFO & DETTAGLI PRODOTTO

Vai al sito

GE BP-1

The inflator has a flow rate of 160 l/min and features an inflation system that allows you to inflate any inflatable up to a maximum pressure of 1250 mbar (18 psi) as well as a control system that guarantees automatic shutdown at the selected pressure.
The GE BP-1 is the ideal inlfator for inflating dinghies, kites, rafts, air mattresses and pool.
Finally, the GE BP-1 is equipped with a new screw hose-inflator attachment system, which makes it even more stable and safe.

INCLUDED IN THE BOX:

- 1.25 m - Ø 21 mm EPDM hose
- Valve fittings
- Shoulder bag
- Battery charger

USER MANUAL

Item	Part number	Max. Pressure	Max air flow	Charge voltage	Charge current	Weight
GE BP-1	K6131320	1,2 bar (18 psi)	160 l/min	12 Vdc	13 A	2 kg

SUP PLATFORM KITES KAYAK

FUNCTIONS

Inflate and deflate

INFO & PRODUCT DETAILS

Go to website

GE BTP-2 MiMa

The GE BTP-2 MiMa represents the evolution of two inflators such as the GE BP1 and GE BTP-1. It is suitable for many applications but is ideal for SUP, being able to reach 1.2 bar (18 psi) maximum pressure. It is equipped with a special pressure gauge for selecting the desired pressure. When reached, it stops automatically.
Average inflation time: 9'30" (265-liter SUP board at 1200 mbar).

INCLUDED IN THE BOX:

- 1.25 m hose - Ø 21 mm in EPDM
- Valve fittings
- Shoulder bag
- Cable with alligator clips for 12-volt power supply

USER MANUAL

Item	Part number	Max. Pressure	Max air flow	Voltage	Max. Current	Weight
GE BTP-2 MiMa	GE3S0004	1,2 bar (18 psi)	420 - 120 l/m	12 Vdc	18 A	2,5 kg

SUP PLATFORM KITES KAYAK

FUNCTIONS

Inflate and deflate

INFO & PRODUCT DETAILS

Go to website

GE 10-8 / GE 10-B

The GE 10 series consists of easy-to-use two-stage inflators.

The first stage produced by a turbine provides high air flow rates at low pressure. When the turbine reaches a pressure of ~80 mbar, it shuts down and automatically starts the two-stage compressor (thus having less air volume) so as to reach the maximum pressure of 800 mbar for the GE 10-8 and GE 10-B.

The GE10-B is equipped with a built-in rechargeable lead-acid battery (12FGH36 - 12V 9Ah).

INCLUDED IN THE BOX:

- 1.70 m - Ø 21 mm PVC hose
- Valve fittings
- Shoulder bag
- Battery charger (GE 10-B)
- Cable with alligator clips (GE 10-3 / GE 10-8)

GE 10-3 / GE 10-8

GE 10-B

SMALL BOATS | KITES | KAYAK | FENDER | LARGE BOATS | MATTRESS | PLATFORM | SMALL TENTS

USER MANUAL

Item	Part number	Max. Pressure	Max. air flow	Voltage	Max. Current	Weight
GE 10-3	K6131800	300 mbar (4.4 psi)	450 l/m	9 ÷16 Vdc	13 A	2.5 kg
GE 10-8	K6131830	800 mbar (11.6 psi)	450 l/m	9 ÷16 Vdc	13 A	2.5 kg
Item	**Part number**	**Max. Pressure**	**Max. air flow**	**Charge voltage**	**Charge current**	**Weight**
GE 10-B	K6131860	800 mbar (11.6 psi)	450 l/m	110/230 Vac	3 A	4.7 kg

FUNCTIONS

Inflate and deflate

INFO & PRODUCT DETAILS

Go to website

SL & HP

Rechargeable batteries, SL lead-acid battery with a capacity of 9'000 mAh and HP NI-MH battery with a capacity of 10'000 mAh.

Both with a 12V voltage and a maximum discharge current of 25 A.

- Applicable to all GE BP and GE BTP versions.
- Easy connection to inflators
- Can be inserted into the bag of all GE BP and GE BTP versions
- Battery charger (120V / 230V) included

SL BATTERIA

HP BATTERIA

USER MANUAL

Item	Part number	Voltage	Max. Current	Capacity	Weight
SL BATTERY	K6131295	12 Vdc	25 A	9'000 mAh	3 kg
HP BATTERY	K6131290	12 Vdc	25 A	10'000 mAh	3 kg

FUNCTIONS

Rechargeable battery

INFO & PRODUCT DETAILS

Go to website

TURBOMAX

12V or 24V inflator capable of inflating maxi inflatable boats in very few minutes.

- Adjustable pressure between 175 and 250 mbar with AUTOMATIC STOP
- High-performance cable of 1.70 meters
- Safety fuse
- Very flexible: can inflate large chambers and small objects
- Integrated LED control system (12V)

INCLUDED IN THE BOX:

- 2.80 m - Ø 25 mm PU hose
- Valve fittings
- Shoulder bag

ACCESSORIES

LARGE BOATS SMALL BOATS

USER MANUAL

Item	Part number	Max. Pressure	Max air flow	Voltage	Max. Current	Weight
TURBO MAX 12V	GE4S0008	250 mbar (3.6 psi)	1000 l/m	9 ÷16 Vdc	45-60 A	4 kg
TURBO MAX 24V/S	GE4S0010	250 mbar (3.6 psi)	1000 l/m	18 ÷ 32 Vdc	23-30 A	4 kg

FUNCTIONS

Inflate and deflate

INFO & PRODUCT DETAILS

Go to website

TURBOMAX KIT

The TURBOMAX KIT version has an integrated digital driver developed with DSP and MOSFET technologies controlled by a microprocessor.

- The motors turn off automatically once the set pressure is reached.
- The power cable is 0.50 m long with a wired 100 A connector.
- Integrated LED control system (12V only).
- Hose is supplied only on request in 25 mt reels (SP Z031 - R211002).

INCLUDED IN THE BOX:

- Valve fittings
- Mounting brackets and electrical connectors

ACCESSORIES

LARGE BOATS SMALL BOATS

USER MANUAL

Item	Part number	Max. Pressure	Max air flow	Voltage	Max. Current	Weight
TURBO MAX KIT 12V	GE4S0009	250 mbar (3.6 psi)	1000 l/m	9 ÷16 Vdc	70 A	2,6 kg
TURBO MAX KIT 24V	GE4S0011	250 mbar (3.6 psi)	1000 l/m	18 ÷ 32 Vdc	35 A	3 kg

FUNCTIONS

Inflate and deflate

INFO & PRODUCT DETAILS

Go to website

HYPERPUMP 1000

Highly efficient two-stage inflator that guarantees excellent performance, and is characterised by automatic shut-off when the set pressure is reached.

Designed for applications such as large inflatable structures that need to be inflated in a short time, it is capable of reaching a maximum pressure of 1 Bar with considerable air flow rates. of air.

Equipped with an IP65 degree of protection for outdoor use even in adverse weather conditions.

IP 65

ACCESSORIES

SMALL TENTS | TOYS | LARGE TENTS | BARRIERS | PLATFORM

USER MANUAL

Item	Part number	Max. Pressure	Max air flow	Max Power	Voltage	Max. Current	Weight
HYPERPUMP 1000	GE8S0005	1 Bar (14.5 psi)	2000 l/m	1,8 KW	230 Vac	20 A	14 kg

FUNCTIONS

Inflate and deflate

INFO & PRODUCT DETAILS

Go to website

GE 3600

The GE 3600 has been designed for those applications which requires a huge air volume in a few time.

Thanks to 4.400 l/min as max air flow, The GE 3600 is the ideal inflator for sail wings, big tents and huge inflatable structures, reaching 360 mbar as maximum pressure.

With its IP65 protection degree external case, the GE 3600 can be used outside even in adverse weather conditions

Furthermore, it features:

- Automatic refilling system without any further connection.
- Automatic stop once the pre-set pressure is reached.
- Manageable via display board or optionally via Web server.

According to customer needs, the inflation hose of the necessary length can be supplied separately.

IP 65

ACCESSORIES

SAILS LARGE TENTS BARRIERS FENDER

USER MANUAL

Item	Part number	Max. Pressure	Max air flow	Max Power	Voltage	Max. Current	Weight
GE 3600 230V	GE7S0007	360 mbar (5.2 psi)	4400 l/m	3600 W	230Vac 50Hz	20 A	14 kg

FUNZIONI

Gonfia e sgonfia

INFO & PRODUCT DETAILS

Go to website

GE 3600 EVO

The GE 3600 EVO inflator was created as an add-on model starting from the GE 3600 with the same air flow characteristics, but with the great advantage of reaching a maximum pressure of 600 mbar.

The GE 3600 EVO is the ideal tool for fenders, large inflatable structures that need internal pressures above 350 mbar. This model is also equipped with an IP 65-rated external case, so it can be used outdoors even in adverse weather conditions.

Depending on the customer's needs, an inflation hose of the required length can be supplied separately.

IP 65

ACCESSORIES

SAILS LARGE TENTS BARRIERS FENDER

USER MANUAL

Item	Part number	Max. Pressure	Max air flow	Max Power	Voltage	Max. Current	Weight
GE 3600 EVO 230V	GE8S0003	600 mbar (8.7 psi)	4400 l/m	3600 W	230Vac 50Hz	20 A	14 kg

FUNCTIONS

Inflate and deflate

INFO & PRODUCT DETAILS

Go to website

GE 1800 ROMA

The GE 1800 ROMA is an all-weather inflator (protection rating: IP66) suitable for large inflatable structures. Thanks to the Automatic Refilling System (A.R.S.), the inflator is able to maintain the rated pressure inside the inflatable within set values, regardless of the ambient temperature. The pump constantly monitors the pressure change inside the inflatable and adjusts operation to ensure filling and pressure relief via pneumatic sensor.

INCLUDED IN THE BOX:

- Fittings to hose from Ø40mm
- Fittings to hose from Ø25mm
- Carrying strap

IP 66

ACCESSORIES

SMALL TENTS TOYS LARGE TENTS BARRIERS

USER MANUAL

Item	Part number	Max. Pressure	Max air flow	Max Power	Voltage	Max. Current	Weight
GE 1800 ROMA	K6131900	360 ± 30 mbar (5.2 psi)	3400 l/m	1800 W	230 Vac 50 Hz	9 A	8 kg

FUNCTIONS

Inflate and deflate

INFO & PRODUCT DETAILS

Go to website

GE 1800 EL

The GE 1800 EL represents the Entry Level version of the GE 1800 ROMA.
With an airflow of 3400 l/min, it is ideal for quickly inflating large structures that do not, however, need to be constantly monitored.

INCLUDED IN THE BOX:

- 1.50 m - Ø 40 mm PVC hose
- Valve fittings
- Carrying strap

IP 66

ACCESSORIES

SMALL TENTS | TOYS | LARGE TENTS | BARRIERS

USER MANUAL

Item	Part number	Max. Pressure	Max air flow	Max Power	Voltage	Max. Current	Weight
GE 1800 EL 230V	GE7S0000	360 mbar (5.2 psi)	3400 l/m	1800 W	230 Vac 50 Hz	9 A	8 kg
GE 1800 EL 120V	GE7S0002	600 mbar (8.7 psi)	3400 l/m	1800 W	120 Vac 60 Hz	18 A	8 kg

FUNCTIONS

Inflate and deflate

INFO & PRODUCT DETAILS

Go to website

GE 1800 EVO

An 'all-weather' inflator (degree of protection: IP66) suitable for large inflatable structures, but the difference lies in the maximum pressure it can reach: 600 mbar.

Thanks to the automatic air refilling system, A.R.S. (Automatic Refilling System), the inflator is able to maintain a nominal pressure inside the inflatable within predefined values, regardless of the ambient temperature.

GE 1800 EVO-IC (internal control) versions, unlike EC (external control), control the pressure directly from the inflation hose, without the need for an additional connection to the inflatable.

It is possible to control the various functions via the display, or via webserver.

INCLUDED IN THE BOX:

- 1.50 m - Ø 40 mm PVC hose
- Valve fittings
- Carrying strap

USER MANUAL

IP 66

ACCESSORIES

SMALL TENTS | TOYS | LARGE TENTS | BARRIERS

Item	Part number	Max. Pressure	Max air flow	Max Power	Voltage	Max. Current	Weight
GE 1800 EVO 230V EC	GE7S0006	600 mBar (8.7 psi)	2000 l/m	1800 W	230 Vac 50Hz	9 A	6,4 kg
GE 1800 EVO 120V EC	GE7S0012	600 mBar (8.7 psi)	2000 l/m	1800 W	120 Vac 60Hz	18 A	6,4 kg
GE 1800 EVO 230V IC	GE7S0017	600 mBar (8.7 psi)	2000 l/m	1800 W	230 Vac 50Hz	9 A	6,4 kg
GE 1800 EVO 120V IC	GE7S0018	600 mBar (8.7 psi)	2000 l/m	1800 W	120 Vac 60Hz	18 A	6,4 kg

FUNCTIONS

Inflate and deflate

INFO & PRODUCT DETAILS

Go to website

GE 900 - GE 900 A.R.S.

GE 900s are electric inflators designed to inflate and deflate inflatable products of various sizes. They reach a maximum pressure of 170 mbar with a flow rate of 1700 l/min. All this with low noise impact (max 85dB).

The GE 900 A.R.S. (Automatic Refilling System) is an automatic inflating and deflating system. It has an easy and intuitive digital display that allows the setting of the maximum and minimum pressure within which the inflatable must be maintained.

INCLUDED IN THE BOX GE 900:

- 1.50 m - Ø 25 mm PU hose (GE 900)
- Valve fittings
- Carrying strap

INCLUDED IN THE BOX GE 900 A.R.S.:

- Carrying strap

USER MANUAL

Item	Part number	Max. Pressure	Max air flow	Max Power	Voltage	Max. Current	Weight
GE 900 120V	K6131650	170 mbar (2.5psi)	1700 l/m	600 W	120 Vac	6 A	2,3 Kg
GE 900 230V	K6131600	170 mbar (2.5psi)	1700 l/m	600 W	230 Vac	3 A	2,3 Kg
GE 900 A.R.S. 120V	GE4S0007	170 mbar (2.5psi)	1700 l/m	600 W	120 Vac	6 A	2,3 Kg
GE 900 A.R.S. 230V	K6131630	170 mbar (2.5psi)	1700 l/m	600 W	230 Vac	3 A	2,3 Kg

<85 dB

GE 900

ACCESSORIES

<85 dB

GE 900 A.R.S.

ACCESSORIES

SMALL TENTS TENTS TOYS LARGE TENTS BARRIERS PLATFORM FENDER

FUNCTIONS

Inflate and deflate

INFO & PRODUCT DETAILS

Go to website

GE 900 AA+ - GE 900 AA+/40

The GE 900 AA+ is designed to inflate and deflate inflatable products of various sizes for a wide variety of applications. The inflator can reach a maximum pressure of 250 mbar with a flow rate of 1700 l/min.

INCLUDED IN THE BOX:

- 1.50 m hose - Ø 25 mm PU (900 AA+)
- 1.50 m - Ø 40 mm PVC hose (900 AA+/40)
- Valve fittings
- Carrying strap

GE 900 AA+

ACCESSORIES

GE 900 AA+ / 40

ACCESSORIES

SMALL TENTS | TENTS | TOYS | LARGE TENTS | BARRIERS | PLATFORM | FENDER

USER MANUAL

Item	Part number	Max. Pressure	Max air flow	Max Power	Voltage	Max. Current	Weight
GE 900 AA+ 120V	GE4S0004	250 mbar (3,6 psi)	1700 l/min	1000 W	120 Vac (60 Hz)	8 A	2,4 Kg
GE 900 AA+ 230V	K6131610	250 mbar (3,6 psi)	1700 l/min	1000 W	230 Vac (50 Hz)	4 A	2,4 Kg
GE 900 AA+/40	GE4S0005	250 mbar (3,6 psi)	1700 l/min	1000 W	230 Vac (50 Hz)	4 A	2,4 Kg

FUNCTIONS

Inflate and deflate

INFO & PRODUCT DETAILS

Go to website

GE OV4

This compact and versatile electric inflator is designed to quickly inflate and deflate inflatables such as: kayaks, mattresses and small structures.
Prominent among its features is the sand filter, which protects the device from the entry of unwanted particles, ensuring longer life and reliable performance.

INCLUDED IN THE BOX:

- 1.50 m - Ø 25 mm PU hose
- Valve fittings

ACCESSORIES

SMALL TENTS TOYS FENDER BARRIERS MATTRESS

USER MANUAL

Item	Part number	Max. Pressure	Max air flow	Max Power	Voltage	Max. Current	Weight
GE OV4 230V	K6130415	150 mbar (2.2 psi)	950 l/m	400 W	230 Vac	3 A	0.9 kg

FUNCTIONS

Inflate and deflate

INFO & PRODUCT DETAILS

Go to website

ACCESSORIES FOR TURBOMAX SERIES

TURBOMAX CONNECTOR
R401159

Connector (10 x 3 x 3 cm) male/female for devices with power up to 100 A 12 VDC. The kit allows wiring of cables from 5 to 10 mm2

TURBOMAX 12V	
TURBOMAX 24V	
TURBOMAX KIT 12V	√
TURBOMAX KIT 24V	√

SP Z031
R211002

Inflation hose
25 m /ø 25 mm - PU

TURBOMAX 12V	O
TURBOMAX 24V	O
TURBOMAX KIT 12V	O
TURBOMAX KIT 24V	O

SP 216
R151032

Orange bayonet connector
for BRAVO TURBO MAX

TURBOMAX 12V	√
TURBOMAX 24V	√
TURBOMAX KIT 12V	√
TURBOMAX KIT 24V	√

SP 214
R151025

Adapters + PU tube, dimensions:
2.8 m x Ø 25 mm

TURBOMAX 12V	√
TURBOMAX 24V	√
TURBOMAX KIT 12V	O
TURBOMAX KIT 24V	O

CONTENITORE TURBO MAX
K6130024

Allows the TURBO MAX KIT to be mounted flush with the dashboard and protects the inflator from splashes and dirt(Nylon and PE)
Dimensions: 34.5 x 22 x 1.8 cm

TURBOMAX 12V	O
TURBOMAX 24V	O
TURBOMAX KIT 12V	●
TURBOMAX KIT 24V	●

● Recommended O Optional √ Included

ELECTRIC INFLATOR ACCESSORIES

SP 217
R151052

With connection for Boston Valve

Dimensions:
1.5 m x Ø 25 mm

Material:
PU

GE 900	O
GE 900 AA+	O
GE 900 AA+/40	O
GE OV4	O

SP 215
R151030

With fitting for VA 2005

Dimensions:
1.5 m x Ø 25 mm

Material :
PU

GE 900	O
GE 900 AA+	O
GE 900 AA+/40	O
GE OV4	O

SP Z126
R151133

With connection for 260 H.V.

Dimensions:
1.5 m x Ø 40 mm

Material:
EPDM

GE 900 SERIE	●
GE 1800 SERIE	●
GE 3600 EVO	●
HYPERPUMP 1000	●
GE OV4	●

SP Z134
R151134

Pipe-pump Y-connector compatible with ø 25mm hose barb (R210033) and ø 40mm hose barb (R210032)

GE 900 SERIE	O
GE 1800 SERIE	O
GE 3600 EVO	O
HYPERPUMP 1000	O
GE OV4	O

GE 900 IP65 KIT
RH0S0018

IP 65 kit for GE 900

GE 900	O
GE 900 AA+	O
GE 900 AA+/40	O

● Recommended O Optional √ Included

ELECTRIC INFLATOR ACCESSORIES

SP Z034 - Art. 866
R211005



Pressure control tube
PU Ø 6 mm x 15 m.

GE 1800 ROMA	●
GE 1800 EVO EC	●

SP 156
R151023N

FOR HR-TYPE VALVES
6 mm fitting for connecting the pressure control tube to the valve of the structure to be inflated.

GE 1800 ROMA	●
GE 1800 EVO EC	●

SP 157
R151024N

FOR 2005 BRAVO TYPE VALVES.
6 mm fitting for connecting the pressure control tube to the valve of the structure to be inflated.

GE 1800 ROMA	●
GE 1800 EVO EC	●

SP Z032 - Art. 850
R211003 - EPDM

Ø 40 mm x 15 m high-performance pipe

GE 900 SERIE	O
GE 1800 SERIE	O
GE 3600 EVO	●
HYPERPUMP 1000	●
GE OV4	O

SP Z033 - Art. 860
R211004 - PVC

Ø 40 mm x 15 m high-performance pipe

GE 900 SERIE	O
GE 1800 SERIE	O
GE OV4	O

● Recommended O Optional √ Included

ELECTRIC INFLATOR ACCESSORIES

SP Z027 - Art. 760
R210035

Ø 40 mm pipe-valve fitting for BRAVO VALVE 260 H.V.

GE 1800 ROMA	●
GE 1800 EL	√
GE 1800 EVO	√
GE 900	●
GE 3600 EVO	●
GE OV4	O
HYPERPUMP 1000	●

SP Z135
R151136

40/25 mm adapter for connecting ø40 mm pipes with 25 mm fittings. To be screwed into item R210035.

GE 1800 ROMA	O
GE 1800 EL	√
GE 1800 EVO	√
GE 900	O
GE 3600 EVO	O
GE OV4	O
HYPERPUMP 1000	O

SP Z025 - Art. 741
R210033 - 25 mm

Fittings to match Ø25mm pipes

GE 1800 ROMA	√
GE 900	√
GE 900 AA+	√
GE 900 AA+ / 40	O
GE 1800 EL	O
GE OV4	O

SP Z024 - Art. 740
R210032-40mm

Fittings to match Ø40mm pipes

GE 1800 SERIE	√
GE 900	●
GE 900 AA+	●
GE 900 AA+ / 40	√
HYPYERPUMP 1000	●
GE 3600 EVO	●
GE OV4	●

● Recommended O Optional √ Included

OVERVIEW

With more than **40 years in the inflator business,** Scoprega offers **manual and foot-operated inflators that can meet all user needs.**

Thanks to state-of-the-art design and engineering, it is possible to **inflate faster and with less effort than any other pump on the market, enabling exceptional performance with minimal effort.**

Pedal inflators, on the other hand, can provide the ideal solutions for all inflating needs with **capacities ranging from 3.5 to 6 liters and maximum pressure from 300 to 800mbar.**

To make the lifespan of Scoprega inflators as long as possible, the **materials are resistant to the sun and the marine environment,** and **shoulder bags and lithographed boxes are also available upon request.**

Group	Item	Part number	Max. pressure	Max. flow rate	Fittings	Inflation hose
GM NX	GM NX	K6121100	1.9 bar (27.5 psi)	2 x 2000 cc	YES	1,25 m - Ø20 mm - LPDE + EVA
	GM NXS	K6121150	1.9 bar (27.5 psi)	2 x 2000 cc	YES	1,25 m - Ø20 mm - LPDE + EVA
SUPER F	SUPER F - SILVER	GM1N0000	2.0 bar (29 psi)	2x2500 cc	YES	1,25 m - Ø20 mm - LPDE + EVA
	SUPER F - BLACK	6121717N	2.0 bar (29 psi)	2x2500 cc	YES	1,25 m - Ø20 mm - LPDE + EVA
BRAVO 100-D	BRAVO 100-D	K6120540	1.9 bar (27.5 psi)	2 x 2000 cc	YES	1,25 m - Ø20 mm - LPDE + EVA
GM 6	GM 6	K6120770	1 bar (14.5 psi)	2 x 2500 cc	YES	1,25 m - Ø20 mm - LPDE + EVA
GM5	GM 5	GM1S0000	1 bar (14.5 psi)	2 x 2400 cc	YES	1,25 m - Ø20 mm - LPDE + EVA
GM 110 MIL	GM 110 MIL	K6120750	1 bar (14.5 psi)	2 x 2000 cc	YES	1,25 m - Ø20 mm - LPDE + EVA

Group	Item	Part number	Max. pressure	Max. flow rate	Fittings	Inflation hose
BRAVO 1	BRAVO 1	6070001	500 mbar (7.2 psi)	4 Litre	YES	1,70 m - Ø21 mm - LPDE + EVA
GP 5	GP 5	K6080000	300 mbar (4.35 psi)	5 Litre	YES	1,70 m - Ø21 mm - LPDE + EVA
GP 10	GP 10	6090010	800 mbar (11.6 psi)	5,5 L / 1,6 L	YES	1,70 m - Ø21 mm - LPDE + EVA

GM NX / GM NXS

The GM NX and GM NXS represent a new generation of environmentally sustainable hand pumps suitable for all types of inflatable products. The unique design ensures high efficiency and ease of use. The body is made of 75% recycled aluminum (CIRCAL®) provides greater impact resistance and increases reliability, reducing the use of plastic by more than 50%.

- Manual double/single flow switching to minimize effort in inflation
- Ergonomic handle with air filter and integrated pressure gauge
- Inflation port on pump body (kink-resistant hose)

INCLUDED IN THE BOX:

- 1.25 m hose - Ø 20 mm in LPDE + EVA
- Valve fittings
- Carrying bag

USER MANUAL

Item	Part number	Max. Pressure	Capacity	Inflate mode	Weight	Materials
GM NX	K6121100	1.9 bar (27.5 psi)	2 x 2000 cc	double/single action	1,6 kg	ABS + ALUMINUM
GM NXS	K6121150	1.9 bar (27.5 psi)	2 x 1500 cc	double/single action	1,5 kg	ABS + ALUMINUM

GM NX

GM NXS

SUP KITES KAYAK

FUNCTIONS

Inflate and deflate

INFO & PRODUCT DETAILS

Go to website

SUPER F

The Super-F hand pump is based on a new technology that makes it more efficient (less effort to inflate). The key point was to attach the aluminum inflation tube to the outside.

Other advantages are:

- the position of the pressure gauge on the lid (not on the handle), making it easier to read the air pressure
- the inflation port on the body, no kinking of the tube during inflation.

In addition, the Super-F has a foldable base and the handles can be disassembled to save space in the package.

INCLUDED IN THE BOX:

- 1.25 m hose - Ø 20 mm in LPDE + EVA
- Valve fittings

USER MANUAL

Item	Part number	Max. Pressure	Capacity	Inflate mode	Weight	Materials
SUPER-F SILVER	GM1N0000	2.0 bar (29 psi)	2x2500 cc	double/single action	1,2 kg	ABS
SUPER-F BLACK	6121717N	2.0 bar (29 psi)	2x2500 cc	double/single action	1,2 kg	ABS

SUPER F - SILVER

SUPER F - BLACK

SUP KITES KAYAK

FUNCTIONS

Inflate and deflate

INFO & PRODUCT DETAILS

Go to website

BRAVO 100-D

Inflators with innovative design and engineering allow them to inflate faster and with less effort than any other pump on the market, with manual double/single flow switching.
Inflation port on the pump body allows the hose to hold steady during use.
- Built-in pressure gauge and protective filter.
- Internal tubing is 75% recycled aluminum (CIRCAL®).
- Shoulder bag and lithographed box available as options.

INCLUDED IN THE BOX:

- 1.25 m hose - Ø 20 mm in LPDE + EVA
- Valve fittings
- Rope for attachment to kite (GM6)

SUP KITES KAYAK SMALL BOATS LARGE BOATS

USER MANUAL

Item	Part number	Max. Pressure	Capacity	Inflate mode	Weight	Materials
BRAVO 100-D	K6120540	1.9 bar (27.5 psi)	2 x 2000 cc	double/single action	1,2 kg	ABS + ALUMINUM

FUNCTIONS

Inflate and deflate

INFO & PRODUCT DETAILS

Go to website

GM 110 MIL

Special model for army and rescue groups, constructed of impact and wear-resistant plastic and metal materials

-Manual double/single flow switching.

-Inflation port installed on the pump body allows the hose to remain stationary during use

-Integral pressure gauge, built-in protective filters

INCLUDED IN THE BOX:

- 1.25 m hose - Ø 20 mm in LPDE + EVA
- Valve fittings

SMALL TENTS LARGE TENTS SMALL BOATS LARGE BOATS

USER MANUAL

Item	Part number	Max. Pressure	Capacity	Inflate mode	Weight	Materials
GM 110 MIL	K6120750	1 bar (14.5 psi)	2 x 2000 cc	double/single action	2 Kg	ABS + Aluminum + Acciaio INOX

FUNCTIONS

Inflate and deflate

INFO & PRODUCT DETAILS

Go to website

BRAVO 1

- Reinforced fabric band
- Stainless steel metal parts
- Universal adapter

INCLUDED IN THE BOX:

- 1.70 m hose - Ø 21 mm in LPDE + EVA
- Valve fittings

TOYS KITES KAYAK SMALL BOATS LARGE BOATS MATTRESS

USER MANUAL

Item	Part number	Max. Pressure	Capacity	Weight	Materials
BRAVO 1	6070001	500 mbar (7.2 psi)	4 L	1,1 Kg	PA66 / PVC / Inox

FUNCTIONS

Inflate and deflate

INFO & PRODUCT DETAILS

Go to website

GP 5

- High-performance foot-operated inflator
- Inflation fittings for all common valves

INCLUDED IN THE BOX:

- 1.70 m hose - Ø 21 mm in LPDE + EVA
- Valve fittings

TOYS KITES KAYAK SMALL BOATS LARGE BOATS MATTRESS

USER MANUAL

Item	Part number	Max. Pressure	Capacity	Weight	Materials
GP 5	K6080000	300 mbar (4.35 psi)	5 L	1,2 Kg	PA66 / PVC / Inox

FUNCTIONS

Inflate and deflate

INFO & PRODUCT DETAILS

Go to website

GP 10

The inflator's dual chamber design allows it to effortlessly achieve the recommended pressure for all large fabric or rubber dinghies.
It is equipped with a visual pressure indicator to signal overinflation of the dinghy if the user does not check the pressure with the pressure gauge.
- Sturdy, being made of glass-filled nylon, unaffected by the sun and the marine environment
- Large but lightweight, being made of plastic material (1.9 kg)
- Stable on the ground, thanks to the 4 non-slip feet

INCLUDED IN THE BOX:
- 1.70 m hose - Ø 21 mm in LPDE + EVA
- Valve fittings



A
Large air volume 5.5 L (low pressure)
Max pressure 150 mbar (4.4 psi)

B
Smaller air volume 1.6 L (high pressure)
Max pressure 800 mbar (11.6 psi)

TOYS KITES KAYAK SMALL BOATS LARGE BOATS MATTRESS

USER MANUAL

Item	Part number	Max. Pressure	Capacity	Weight	Materials
GP 10	6090010	800 mbar (11.6 psi)	5,5 L / 1,6 L	1,9 kg	Nylon + ABS

FUNCTIONS
Inflate and deflate

INFO & PRODUCT DETAILS
Go to website

03. SISTEMI

- Air10 Pro
- OKTOPLUS
- Manifold

Scoprega looks to the future in line with its motto “Look beyond”, **focusing on the development of special systems for specific applications,** both existing and under development.

The company’s goal and mission are to support and accompany these developments, embodying the vision of looking beyond and aiming for the constant improvement of inflatable solutions globally.

Inflatable systems made to customer specifications, together with Scoprega S.p.A., **can be customized to suit your needs** (graphics, color, logo, etc.).

Air10 Pro

Designed to meet the most demanding needs of professionals, it combines high performance with unmatched efficiency in every application.

All this is enclosed in a compact and robust design that guarantees durability and ease of transport. Its surprisingly quiet operation allows you to work in maximum comfort without disturbing the surrounding environment, with exceptional reliability that minimizes downtime and maximizes productivity.

INCLUDED IN THE BOX:

- High-pressure inflation hose
- Hose connection accessories - valve (image below)

HIGH PRESSURE

Item	Max. Pressure	Max air flow	Max Power	Voltage	Max. Current	Weight
Air10 Pro	10 Bar (145 psi)	140 l/m	1500 W	230 Vac 50 Hz	5 A	15 kg

FUNCTIONS

Inflate and deflate

INFO & DETTAGLI PRODOTTO

Vai al sito

CYRCLE

Innovative autonomous inflation system for inflatable boats to control the pressure of your boat's tubes in complete autonomy and control.
Designed to constantly monitor and regulate the pressure inside each compartment of your boat, it guarantees flawless and continuous control, ensuring that the air pressure in the tubes always remains optimal.
This translates not only into greater safety while sailing, preventing potentially dangerous situations due to unexpected pressure surges or drops, but also into a significant improvement in the performance and handling of the inflatable boat.

INCLUDED IN THE BOX:

- Inflation system.
- Connection valves between the air chambers.
- Inflation tubes for connection.

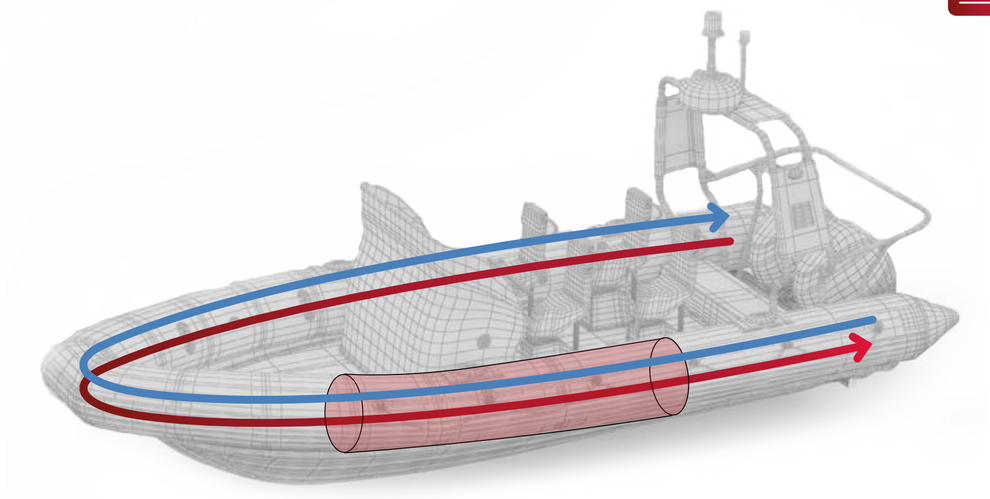

BOATS

Item	Max. Pressure	Max air flow	Voltage	Max. Current	Weight
Cyrcle 12V	250 mbar (3.6 psi)	1000 l/m	9 ÷16 Vdc	55 A	4 kg
Cyrcle 24V	250 mbar (3.6 psi)	1000 l/m	18 ÷ 32 Vdc	35 A	4 kg

FUNCTIONS

Inflate and deflate

INFO & DETTAGLI PRODOTTO

Vai al sito

A cutting-edge inflation and deflation system that redefines operational efficiency and safety.

Based on the connection of multiple interconnected elements, the system offers h**igh performance and optimal space management.**

It can **deliver air up to a maximum of 350 or 1000 mbar** (depending on the model), maintaining a **very high air flow rate,** and is **equipped with an internal pressure detection system.**

All models can be fitted with mounting brackets on which to mount the inflator, available on request (overall dimensions and space requirements).



OKTOPLUS
350



OKTOPLUS
600



OKTOPLUS
1000

OKTOPLUS

OKTOPLUS 350

A cutting-edge inflation and deflation system that redefines operational efficiency and safety.
It is an inflator designed not only to simplify tasks, but also to improve safety through continuous pressure control (P.C.S.), preventing potential emergency situations.
Its robustness and reliability make it the ideal choice, offering high performance and optimal space management.
It is capable of delivering air up to a maximum of 350 mbar, maintaining a very high air flow, and is also equipped with an internal pressure detection system.
Mounting brackets are available on request for installing the inflator.

INCLUDED IN THE BOX:

- Ø 40 mm EPDM hose
- 260 H.V. valve

IP 65

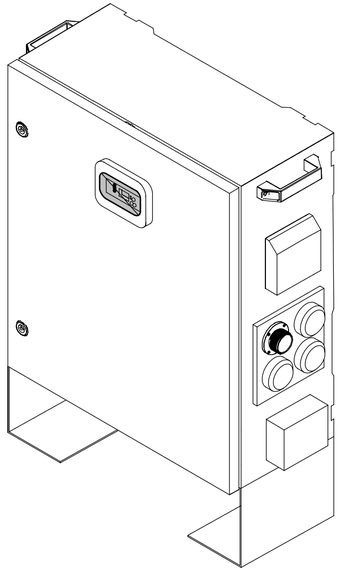

SAILS TOYS STRUCTURE BARRIERS PLATFORM TENT

Item	Max. Pressure	Max air flow	Voltage	Max. Current	Weight
OKTOPLUS 350	350 mbar (5.1 psi)	4400 l/m	110 -230 Vac (60 - 50 Hz)	30 A	30 kg

FUNCTIONS

Inflate and deflate

INFO & DETTAGLI PRODOTTO

Vai al sito

OKTOPLUS 600

We present a high-performance inflation and deflation system that is the heart of the system, safely distributing air through flexible hoses to control panels strategically located around the yacht.

From the control panel, you can manage the inflation and deflation of external components such as tenders, platforms, or fenders, optimizing time and improving maneuvering efficiency.

It can deliver air up to a maximum of 600 mbar, maintaining a very high air flow, and is also equipped with an internal pressure detection system.

Mounting brackets are available on request for installing the inflator.

INCLUDED IN THE BOX:

- Ø 40 mm EPDM hose
- 260 H.V. valve

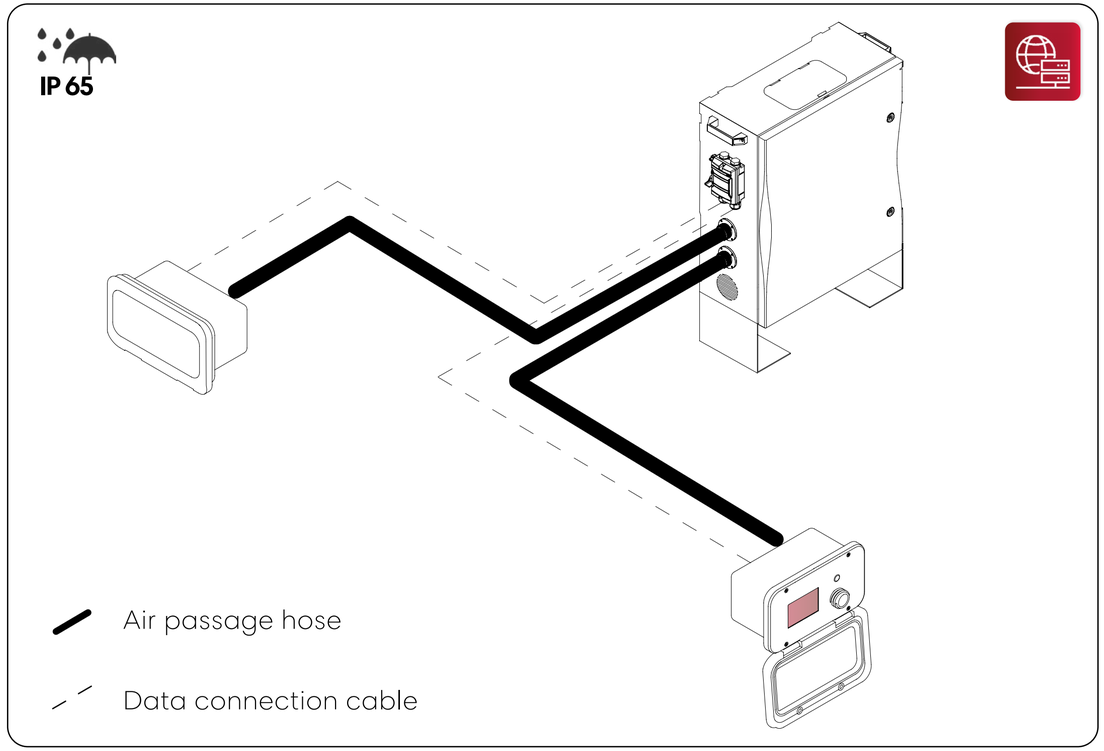

TO BE INSTALLED ON BOARD

TOYS | STRUCTURE | BARRIERS | PLATFORM | TENT

Item	Max. Pressure	Max air flow	Voltage	Max. Current	Weight
OKTOPLUS 600	600 mbar (8.7 psi)	4400 l/m	110 -230 Vac (60 - 50 Hz)	30 A	30 kg

FUNCTIONS

Inflate and deflate

INFO & DETTAGLI PRODOTTO

Vai al sito

OKTOPLUS 1000

A cutting-edge inflation and deflation system that redefines operational efficiency and safety.
At the heart of the system is an inflator designed not only to simplify routine tasks, but also to improve safety through continuous pressure control (P.C.S.), effectively preventing potentially dangerous emergency situations.
Its robustness and reliability make it the ideal choice for high performance and optimal space management.
It is capable of delivering air up to a maximum of 1000 mbar, maintaining a very high air flow, and is also equipped with an internal pressure detection system.
Mounting brackets are available on request for installing the inflator.

INCLUDED IN THE BOX:

- Flexible hose Ø 40 mm from 10-20 bar
- Valve 260 H.V.

IP 65

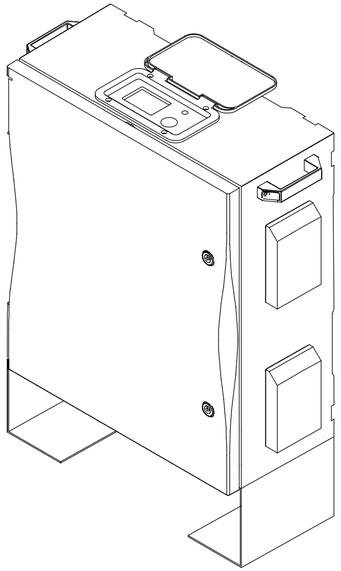

SAILS TOYS STRUCTURE BARRIERS PLATFORM TENT

Item	Max. Pressure	Max air flow	Voltage	Max. Current	Weight
OKTOPLUS 1000	1000 mbar (14.5 psi)	3500 l/m	110 -230 Vac (60 - 50 Hz)	30 A	30 kg

FUNCTIONS

Inflate and deflate

INFO & DETTAGLI PRODOTTO

Vai al sito

MANIFOLD

Scoprega expands its offering with innovative inflation systems: **Manifolds.**
This represents a significant step in **strengthening our position as a leader in innovation for inflatable solutions.**

Inflation manifolds are crucial components that revolutionize the inflation process. Their main function is to diversify inflation, **strategically increasing the air entry points inside inflatable devices.**
This **allows for more efficient and controlled air distributio**n, ensuring uniform and optimal inflation, which is essential for the stability and performance of the final product.

A distinctive strength of our manifold systems is their complete adaptability. **They can be designed and manufactured to specific customer requirements,** taking into account the type of inflatable and the unique needs of each application.

This customized approach ensures that each manifold is perfectly integrated and maximizes inflation efficiency, **offering tailor-made solutions that precisely meet individual needs.**

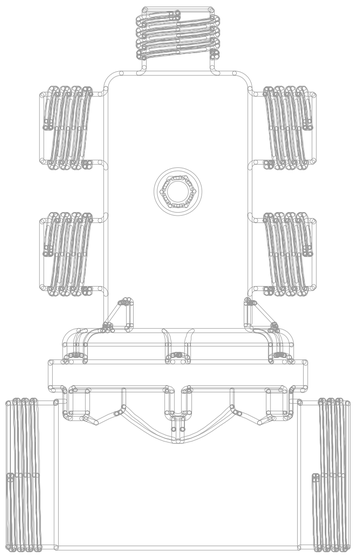

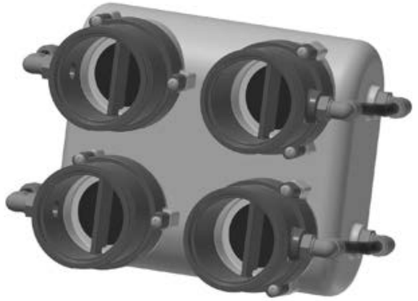

04. OARS & PADDLES

- OVERVIEW
- OARS
- PADDLES

OVERVIEW

Within a wide range of products intended for the marine industry, Scoprega **oars and paddles play an important role in terms of production.**

Research on **ergonomics** and **hydrodynamics** cannot ignore the **need for lightness and rigidity** that are specific to the end user.

The result of this research becomes the starting point on which the Design is elaborated, accompanied in parallel by the study of the **most suitable materials selected ad hoc depending on the final application of our oars and paddles.** Without ever neglecting their aesthetics.

The range of oars and paddles, ergonomic and buoyant, covers all sports and safety applications as well as all specific user needs.

BUOYANCY:
All oars and paddles produced and marketed by Scoprega have been developed and tested to **have a buoyancy in water of ~10 minutes.**

RSP

Made of PVC and aluminum, light and strong materials, variable in shape and length, they offer maximum performance.

The letter K indicates models equipped with a rosette suitable for type 145 and 146 scales.

When ordering, you can indicate the distance between the rosette and the handle you want.

Item	Part number		Dimensions	Diameter	MOQ
	Black	Grey			
RSP 160	/	K6501501	160/84 cm	Ø 35 mm x 1 mm	/
RSP 180	K6501600	/	180/84 cm	Ø 35 mm x 1 mm	/
RSP 140 Z	K6501470	K6501471	140 cm	Ø 35 mm x 1 mm	/
RSP 150 Z	K6501480	/	150 cm	Ø 35 mm x 1 mm	/
RSP 160 Z	K6501490	K6501491	160 cm	Ø 35 mm x 1 mm	/
RSP 160 ZK	/	K6501493	160 cm	Ø 35 mm x 1 mm	/
RSP 180 K	K6501602	/	180 cm	Ø 35 mm x 1 mm	/

ON DEMAND, ONLY

Item	Part number		Dimensions	Diametre	MOQ
	Black	Grey			
RSP 160	K6501500	/	160/84 cm	Ø 35 mm x 1 mm	108 pcs
RSP 160 K	K6501550	/	160/84 cm	Ø 35 mm x 1 mm	108 pcs
RSP 160 ZK	K6501492	/	160/84 cm	Ø 35 mm x 1 mm	108 pcs
RSP 150 Z	/	K6501481	150 cm	Ø 35 mm x 1 mm	120 pcs
RSP 150 ZK	K6501482	/	150 cm	Ø 35 mm x 1 mm	108 pcs
RSP 180	/	K6501601	180/84 cm	Ø 35 mm x 1 mm	108 pcs
RSP 180 K	/	K6501603	180 cm	Ø 35 mm x 1 mm	108 pcs

10 min

RSP 140.Z - RSP 150.Z - RSP 160.Z

10 min

RSP 150 - RSP 160 - RSP 180

RSP

Made of PVC and aluminum, light and strong materials, variable in shape and length, they offer maximum performance.

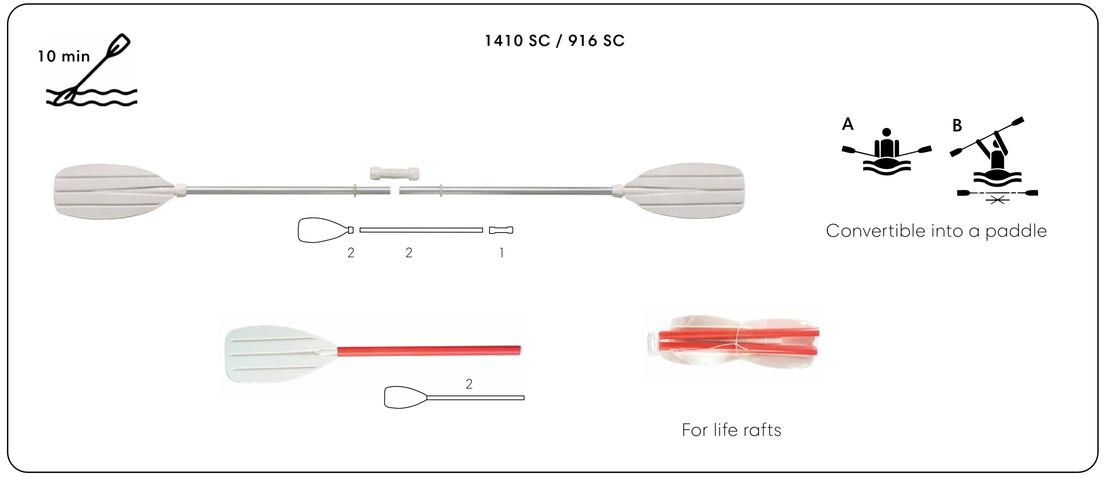

ON DEMAND, ONLY

Item	Part number	Dimensions	Diameter	MOQ
1410/SC	6201421N	222 cm	Ø 28 mm	/

Item	Part number	Dimensions	Diametre	MOQ
916/SC	6942050N	82 cm	Ø 27 mm	/

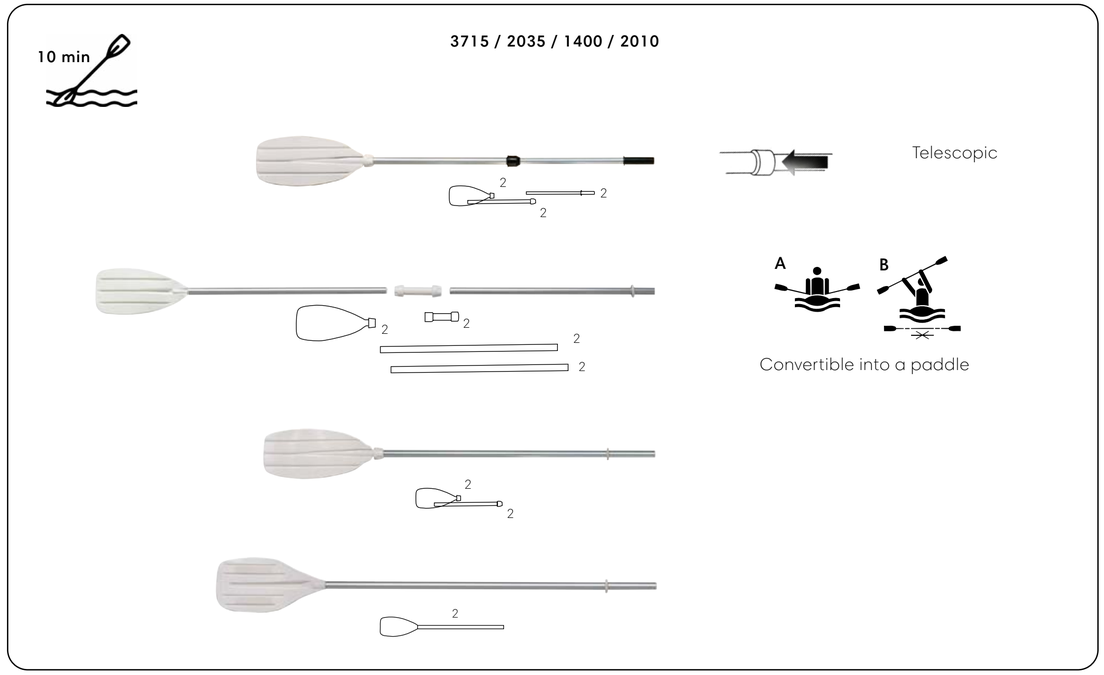

ON DEMAND, ONLY

Item	Part number	Dimensions	Diameter	MOQ
3715/SC	6201415N	120/160 cm Smontato: 70 cm	Ø 28/25 mm	300 pcs
2035/SC	6201221N	A 146cm - B 217cm	Ø 25 mm	300 pcs
1400/SC	6201401N		Ø 28 mm	/
2010/SC	6201111N	140 cm	Ø 28 mm	/

TSP

Made of PVC and aluminum, light and strong materials, variable in shape and length, they offer maximum performance.

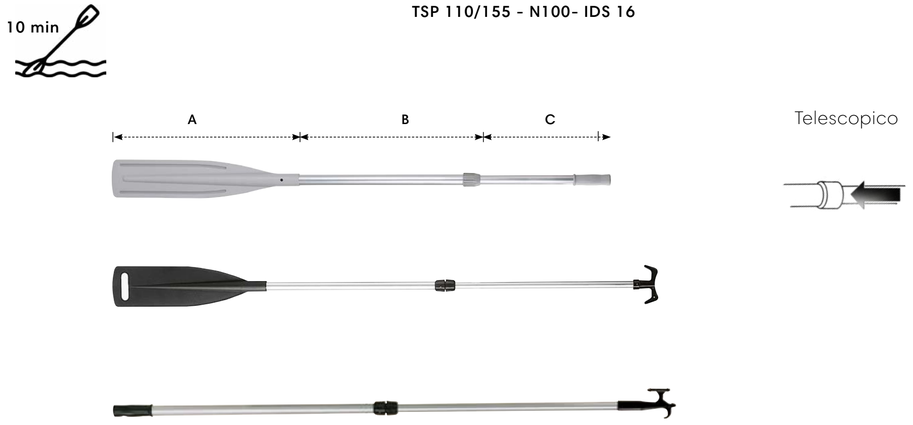

Item	Part number		Dimensions	Diameter	MOQ
	Black	Grey			
TSP 110/155	/	6293101N	A + B + C = 158 cm A + B = 118 cm Smontato: 64 cm	Ø 30/35 x 1 mm	/
TSP 50/120	6293103N	/	A = 50 cm B = 120 cm	Ø 24/28 x 1 mm	/
N100	6281100N	/	120/180 cm	Ø 25/30 x 1 mm	/
IDS 16	6282200N	/	105/180 cm	Ø25/30 x1mm	/

ON DEMAND, ONLY

Item	Part number		Dimensions	Diameter	MOQ
	Black	Grey			
	/	6293104N	A = 50 cm B = 120 cm	Ø 24/28 x 1 mm	

KC FIBERGLASS-2

- 6005T5 aluminum alloy handle
- Polypropylene blade with 40% glass fiber
- Handle system that allows, at all times, to know how the paddle is inclined the paddle.

Peso: 1180 gr.

Handle system that allows, at any time, to know how the paddle is inclined. Shrinkable polyolefin sleeves.

Connessione con 3 posizioni.

ON DEMAND, ONLY

Item	Part number		Dimensions	Diameter	MOQ
	Black	Grey			
KC FIBERGLASS-2	6510200N	/	220 cm	Ø 29 x 1.2 mm	300 pcs

XT FIBERGLASS ADJ

Pagaie resistenti e leggere relizzate con manico in fibra di vetro

MANICO / *SHAFT* - 210-240 cm

Pala in materiale extra strong con 40% fibra di vetro.

Lunghezza e orientamento regolabili tramite chiusura a leva

Item	Part number		Dimensions	Diameter	MOQ
	Black	Grey			
XT FIBERGLASS ADJ	6510700N	/	210-240 cm	Ø 29 x 1.2 mm	/

XT FIBERGLASS-2

Durable and lightweight paddles made with fiberglass handle

Handle system that allows, at anytime, to know how the paddle is inclined. Shrinkable polyolefin sleeves.

Connection with 3 positions.

Item	Part number		Dimensions	Diameter	MOQ
	Black	Grey			
XT FIBERGLASS - 2	6510610N	/	225 cm	Ø 29 x 1.2 mm	/

XT ALU / XT ALU-2

- 6005T5 aluminum alloy handle
- Polypropylene blade with 40% glass fiber
- Handle system that allows, at all times, to know how the paddle is inclined the paddle.

Item	Part number	Dimensions	Diameter	MOQ
XT ALU-2	6511110N	225 cm	Ø 29 x 1.2 mm	/
XT ALU ADJ	6511200N	210-240 cm	Ø 29 x 1.2 mm	/

ON DEMAND, ONLY

Item	Part number	Dimensions	Diameter	MOQ
	6511000N	215 cm	Ø 29 x 1.2 mm	
	6511010N	215 cm	Ø 29 x 1.2 mm	
XT ALU-2	6511100N	215 cm	Ø 29 x 1.2 mm	300 pcs

Handle system that allows, at anytime, to know how the paddle is inclined. Shrinkable polyolefin sleeves.

Connection with 3 positions.

KWB FIBERGLASS-2

- 6005T5 aluminum alloy handle
- Polypropylene blade with 40% glass fiber
- Handle system that allows, at all times, to know how the paddle is inclined the paddle.

Weight: 1000 -1500 gr.

Handle system that allows, at anytime,
to know how the paddle is inclined.
Shrinkable polyolefin sleeves.

Connection with 3 positions.

Item	Part number	Dimensions	Diameter	MOQ
KWB FIBERGLASS - 2	6511620N	230 cm - L = 123 cm	Ø 29 x 1.2 mm	/

ON DEMAND, ONLY

Item	Part number	Dimensions	Diameter	MOQ
KC FIBERGLASS-2	6511610N	220 cm - L = 118 cm	Ø 29 x 1.2 mm	300 pcs

KWB FIBERGLASS ADJ

- 6005T5 aluminum alloy handle
- Polypropylene blade with 40% glass fiber

MANICO / *SHAFT* - 210-240 cm

Paddle made of extra strong material with 40% glass fiber.

Adjustable length and orientation via lever lock

Item	Part number	Dimensions	Diameter	MOQ
KWB FIBERGLASS ADJ	6511700N	210-240 cm	Ø 29 x 1.2 mm	/

KWB ALU / KWB ALU-2 / KWB ALU-4

- 6005T5 aluminum alloy handle
- Polypropylene blade with 40% glass fiber

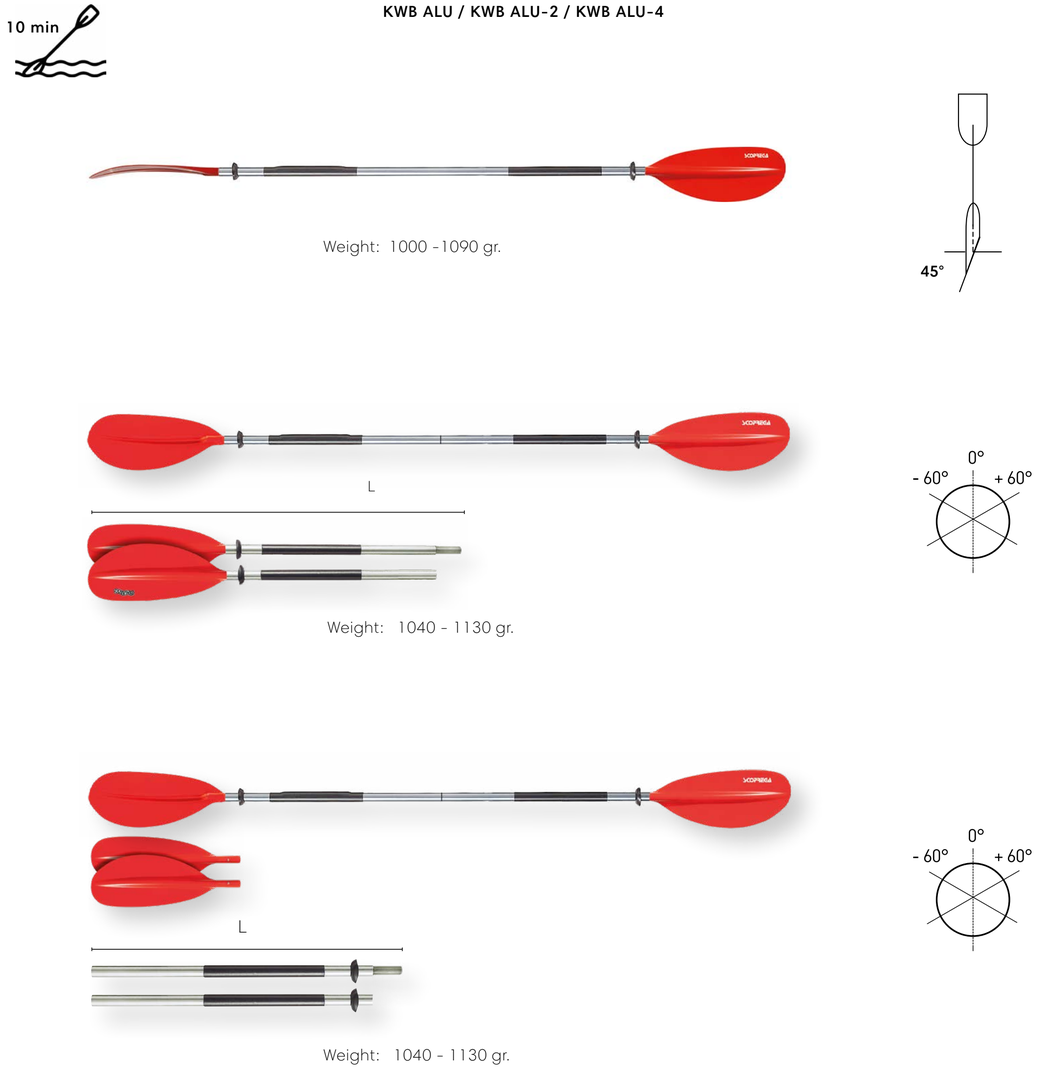

Item	Part number	Dimensions	Diameter	MOQ
KWB ALU-2	6512100N	220 cm - L = 118 cm	Ø 29 x 1.2 mm	/
KWB ALU-4	6512230N	230 cm - L = 77 cm	Ø 29 x 1.2 mm	/

ON DEMAND, ONLY

Item	Part number	Dimensions	Diameter	MOQ
KWB ALU-2	6512110N	230 cm - L = 123 cm	Ø 29 x 1.2 mm	300 pcs
KWB ALU-4	6512220N	220 cm - L = 72 cm	Ø 29 x 1.2 mm	300 pcs
KWB ALU	6512000N	210 cm	Ø 29 x 1.2 mm	300 pcs

KWB ALU ADJ

- 6005T5 aluminum alloy handle
- Polypropylene blade with 40% glass fiber

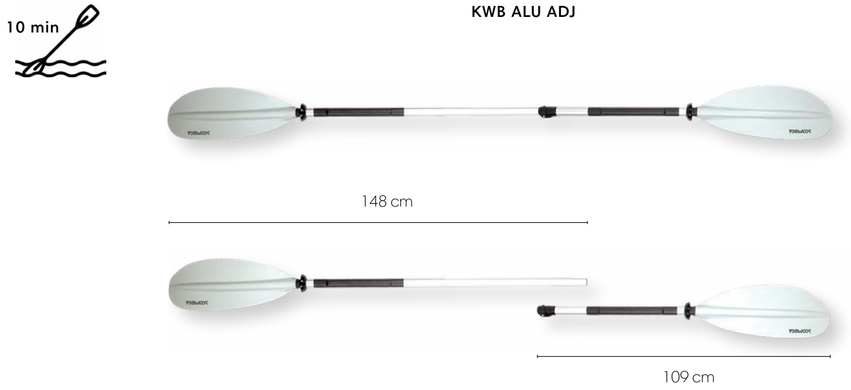

Handle system that allows, at any time, to know how the paddle is inclined. Shrinkable polyolefin sleeves.

Adjustable length and orientation via lever lock

Item	Part number		Dimensions	Diameter	MOQ
	Black	Grey			
KWB ALU ADJ	/	6512300N	210-240 cm	Ø 29 x 1.2 mm	/

AK-PRO / DPR 107 / DPS

- 6005T5 aluminum alloy handle
- Polypropylene blade with 40% glass fiber

10 min

AK-PRO / DPR 107

Weight: 1550 gr.

Weight: 1350 gr.

Item	Part number	Dimensions	Diameter	MOQ
AK-PRO	6271300	210 cm	ALU Ø 32 x 1.2 mm	/

ON DEMAND, ONLY

Item	Part number	Dimensions	Diameter	MOQ
DPR 107	6519800N	210 cm	ALU Ø 32 x 1.2 mm	/

ON DEMAND, ONLY

Item	Part number	Dimensions	Diameter	MOQ
DPS	6519900N	210 cm	ALU Ø 29 x 1.0 mm	300 pcs

10 min

DPS



DPR 107 KIT / DPR 107 C

- 6005T5 aluminum alloy handle
- Polypropylene blade with 40% glass fiber

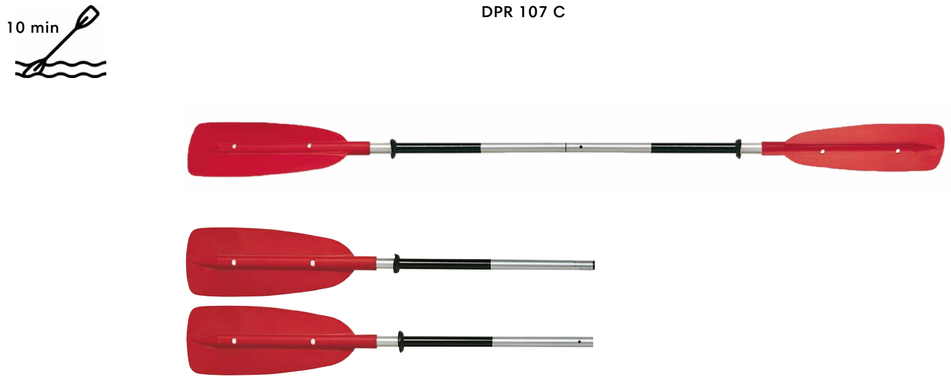

Weight: 1350 gr.

Item	Part number	Dimensions	Diameter	MOQ
DPR 107 KIT	6520100N	**A** 1xKAYAK = 220 cm **B** 2xCANOE = 150 cm	Ø 30 x 1.0 mm	/

ON DEMAND, ONLY

Item	Part number	Dimensions	Diameter	MOQ
DPR 107 C	6520000N	220 cm	Ø 30 x 1.0 mm	300 pcs

RC-PRO / PR 105 / PR 105 C / KK-PRO

- 6005T5 aluminum alloy handle
- Polypropylene blade with 40% glass fiber

Item	Part number	Dimensions	Diameter	Weight
RC PRO	6525010N	150 cm	Ø 29 mm x 1,2 mm	950 g
PR 105	6525100N	140 cm	Ø 30 mm x 1 mm	850 g
	6525110N	150 cm	Ø 30 mm x 1 mm	850 g
	6525120N	160 cm	Ø 30 mm x 1 mm	850 g
PR 105 C	6525200N	150 cm / Smont: 88cm	Ø 30 mm x 1 mm	850 g

ON DEMAND, ONLY

Item	Part number	Dimensions	Diameter	MOQ
KK PRO	7C0S0000	140 cm	Ø 35 mm x 1 mm	/

10 min

RC PRO - PR 105 - PR 105 C - KK PRO

RC PRO - Weight: 950 gr.

PR 105 - Weight: 850 gr.

PR 105 C - Weight: 850 gr.

KK PRO - Weight: 950 gr.

ALU ADJ / FIBERGLASS ADJ

- Adjustable paddle with fast lever lock system
- Fast lever lock adjustable length
- Floating paddle with a new design for higher performance
- Dividable into three parts for convenient transportation
- Double locking system for increased stability
- Convertible into a youth paddle by removing the middle section of the handle

Adjustable length and orientation via lever lock

Item	Part number	Dimensions	Diameter	MOQ
ALU ADJ	6531010N	175/215 cm	Ø 29 x 1.2 mm	/
FIBERGLASS ADJ	6531020N	175/215 cm	Ø 29 x 1.2 mm	/

CARBON ADJ

- Adjustable paddle with fast lever lock system
- Fast lever lock adjustable length
- Floating paddle with a new design for higher performance
- Dividable into three parts for convenient transportation
- Double locking system for increased stability
- Convertible into a youth paddle by removing the middle section of the handle

CARBON ADJ

Adjustable length and orientation via lever lock

ON DEMAND, ONLY

Item	Part number	Dimensions	Diameter	MOQ
CARBON ADJ	6531000N	175/215 cm	Ø 29 x 1.2 mm	300 pcs

FIBERGLASS / ALU

- Telescopic paddle with quick adjustment
- Adjustable from 170 to 215 cm
- Can be disassembled into 3 sections (max. footprint 86 cm)
- Available with fiberglass and aluminum tube
- Glass-filled nylon paddle 23x43 cm
- Lightweight and professional

10 min

SUP FIBERGLASS

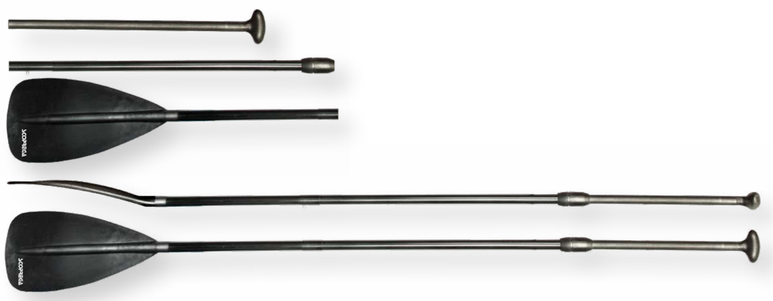

Weight: 1100 gr.

10 min

SUP ALU

Weight: 1050 gr.

Item	Part number	Dimensions	Diameter	MOQ
SUP FIBERGLASS	6531500N	170/215 cm	Ø 29 x 1.8 mm	/
SUP ALU	6531600N	170/215 cm	Ø 29 x 1.8 mm	/

DOUBLE SUP PADDLE KIT

Lightweight, professional paddle available in ALUMINIUM or GLASS FIBER, convertible into a double paddle for seated use.

Adjustable from 170 to 215 cm in the SINGLE SHOVEL mode (A); fixed length 205 cm in the DOUBLE SHOVEL mode (B)

- Thanks to the quick adjustment mechanism, the second shovel can be rotated 360°
- Can be disassembled into 4 sections (max. footprint 86 cm)
- Glass-filled nylon shovel 23x43 cm

Item	Part number	Dimensions	Diameter	MOQ
KIT FIBERGLASS	6531700N	**A** 170/215 cm **B** 205 cm	Ø 29 x 1.8 mm	/

ON DEMAND, ONLY

Item	Part number	Dimensions	Diameter	MOQ
KIT ALU	6531800N	**A** 170/215 cm **B** 205 cm	Ø 29 x 1.4 mm	300 pcs

DOUBLE SUP PADDLE KIT

10 min

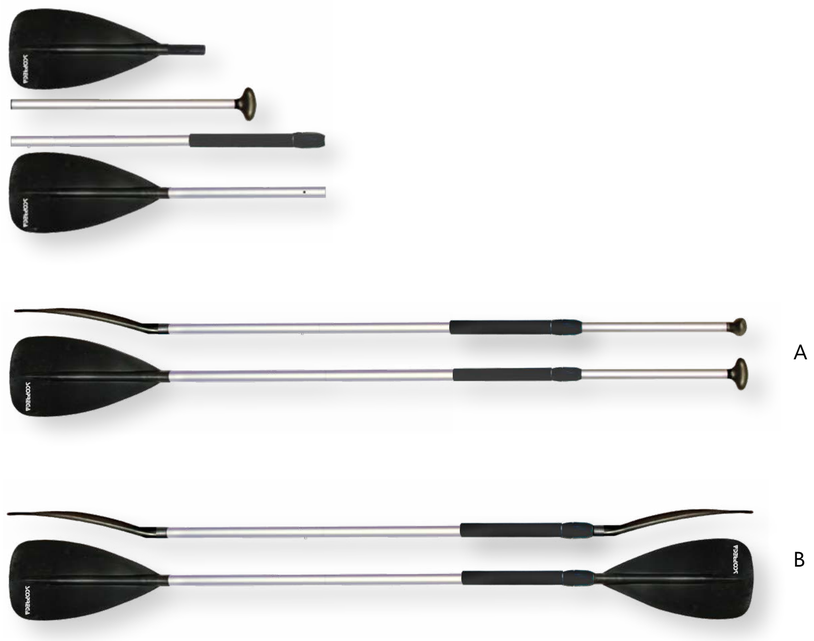

Peso: 1050 gr.

05. | VALVES

- OVERVIEW.
- INFLATION VALVES
- OVERPRESSURE VALVES

OVERVIEW

Since 1979, Scoprega has been designing, manufacturing and selling marine, leisure and water sports products and accessories worldwide.

We started with plastic molding and then **used our know-how in the production of inflation valves.** In the 1990s we came into close contact with the boating and water sports industries.

Quality, efficiency and refined design characterize all our products. This is achieved by searching for the best solution that meets customers' needs.

We listen to customers' needs and invest in "sustainable" technologies to offer the highest quality products that boast the best performance on the market.

VA NX SERIE

VA NX is smaller than the valves currently available on the market.

The valve body is replaceable independently of the inflatable to which it is attached.

It is available in various colors and it is possible to customize the logo on the lid. Along with the standard version, it will also be possible to order the mesh version, VA NX-M.

TECHNICAL DATA SHEET

Black Grey Bronze

Titanium Chrome

Item	Part N.	Color	Fabric hole diametre	Fabric thickness	Dimensions	Nominal flow
VA NX	VG1S0009	nero/black	0,5 mm – 3,5 mm	Ø43 mm	Ø69 x 42 mm [ØD x h]	2000 l/min
	VG1S0000	grigio/grey				
	VG1S0008	titanio/titanium				
	VG1S0007	bronzo/bronze				
	VG1S0006	cromato/chrome				
VA NX core	RH4N0000	grigio/grey	/	/	/	/
Key kit	RH0S0023	grigio/grey	/	/	/	/

SMALL BOATS LARGE BOATS KITES KAYAK SMALL TENTS LARGE TENTS

Tested in accordance with ISO standard number 15738:2019

RH4N0000

RH0S0023



VA SERIES

- Versatile valve that can be used for both low and high pressure.
- Maximum tightness due to special silicone lip seal (maximum pressure 2 bar).
- Sturdy and compact with an ergonomic cap.
- PUSH-PUSH opening (mod. VA 2005)

TECHNICAL DATA SHEET

VA 2005

KITES
KAYAK
SMALL BOATS
FENDER
LARGE BOATS
ALL TENTS

VA 2005/A

KITES
KAYAK
SMALL BOATS
FENDER
LARGE BOATS
ALL TENTS

VA 2005 SUP + MESH

PLATFORM
SUP

Item	Part Number	Material	Color
VA 2005	VG2N0002	POM + ABS	nero/black
	VG2N0003		grigio/grey
VA 2005/A	VG2N0004	POM + ABS	nero/black
	VG2N0005		grigio/grey
VA 2005 SUP + MESH	A102870N	POM + ABS	grigio/grey
ART. 721	A942010N*	ABS	grigio/grey
	R601141**		

Tested in accordance with ISO standard number 15738:2019

*Order min. 500 pcs
**Order min. 1 pcs

Key for valve

BRAVO SERIES

- Versatile valve that can be used for both low and high pressure.
- Maximum tightness due to special silicone lip seal (maximum pressure 2 bar).
- Sturdy and compact with an ergonomic cap.
- PUSH-TURN opening (mod. BRAVO 2000/BRAVO 2001/BRAVO 2014).
- Also available with protective mesh (A102870N / A102718N).

TECHNICAL DATA SHEET

BRAVO 2000

BARRIERS TOYS ALL TENTS ALL BOATS

BRAVO 2001

BARRIERS TOYS ALL TENTS ALL BOATS

BRAVO 2014

FENDER ALL TENTS ALL BOATS KAYAK

BRAVO 2014 + MESH

PLATFORM SUP

Item	Part Number	Material	Color
BRAVO 2000	A102705N	PA6 + POM	nero/black
	A102706N		grigio/grey
BRAVO 2001	A102701N	PA6 + POM	nero/black
	A102700N		grigio/grey
BRAVO 2014	A102716N	PA6 + POM	nero/black
	A102717N		grigio/grey
BRAVO 2014 + MESH	A102718N	PA6 + POM	grigio/grey
ART. 721	A942010N*	ABS	nero/black
	R601141**		grigio/grey

Tested in accordance with ISO standard number 15738:2019

*Order min. 500 pcs
**Order min. 1 pcs

Key for valve

BRAVO 260 H.V.

- Wide-flow inflation valve specifically developed for large inflatable structures.
- Maximum sealing due to special silicone lip seal
- Robust and compact
- “Push-turn” opening with “butterfly” system.

When combined with an inflator with ø 40 mm hose, allows high speed inflation and deflation.

TECHNICAL DATA SHEET

SMALL TENTS · TOYS · LARGE TENTS · BARRIERS · LARGE BOATS

Item	Part Number	Material	Color
BRAVO 260 H.V.	VG3N0001	POM	nero/black
SP Z183	R801374	PA12 + ABS	nero/black

Tested in accordance with ISO standard number 15738:2019

SP Z183

MINI VALVE SERIES

- Versatile valve, usable for both low and high pressure with maximum tightness due to special silicone lip seal (maximum pressure 2 bar).
- Robust and compact with an ergonomic cap.
- PUSH-PUSH opening.

TECHNICAL DATA SHEET

Item	Part Number	Material	Color
MINI VALVE	A131211N	POM	nero/black
	A131201N		grigio/grey
MINI VALVE	VG1N0004	PVC base + POM	nero/black
	VG1N0005		grigio/grey
MINI VALVE	VG1N0001	TPU base + POM	nero/black
	VG1N0002		grigio/grey
ART. 721	A942010N*	ABS	grigio/grey
	R601141**		

MINI VALVE

Suggested tightening force
Max foce: 15 Nm

SMALL BOATS | FENDER | KAYAK

LARGE BOATS | ALL TENTS | KITES

MINI VALVE

SMALL BOATS | FENDER | KAYAK

LARGE BOATS | ALL TENTS | KITES

Tested in accordance with ISO standard number 15738:2019

Key for valve

MINI BOSTON

- New design for quick inflation/deflation
- Robust and compact (external dimensions <3 cm)
- UV resistant
- PVC base easy to assemble by gluing or radio frequency welding
- Ideal for KITE and all PVC applications

TECHNICAL DATA SHEET

KITES ALL TENTS LARGE BOATS KAYAK BARRIERS MATTRESS

Item	Part Number	Material	Color
MINI BOSTON	A131100N	POM + PVC	nero/black

Tested in accordance with ISO standard number 15738:2019

ART. 230

Nylon inflation-only valve, equipped with a non-return valve.

Compact and resistant, it can be applied to the inflatable fabric by means of a ring nut.

TECHNICAL DATA SHEET

LARGE BOATS SMALL BOATS SMALL TENTS MATTRESS TOYS

Item	Part Number	Material	Color
ART. 230	A101230	Nylon	nero/black

Tested in accordance with ISO standard number 15738:2019

ART. 677 / ART. 687 / VA 5/2

Compact, high-efficiency Nylon + POM inflation valve, designed to be applied to any inflatable structure (dinghys, life rafts, tents, etc.).

This valve has a non-return system during inflation, while for a quick deflation action it can be completely removed from the fixing shank (our article 687).

TECHNICAL DATA SHEET

LARGE BOATS SMALL BOATS SMALL TENTS LARGE TENTS TOYS MATTRESS BARRIERS

Item	Part Number	Material	Color
VA 5/2	K6892009	Nylon (PVC cord)	nero/black
677	A401677	ABS	nero/black
687	KA401687	PVC	nero/black
	KA402688	PU	nero/black

Tested in accordance with ISO standard number 15738:2019

SUP RELIEF VALVE

It is the ideal valve for any type of SUP or inflatable platform of any size.

These products are 100% in-house tested before shipping, in compliance with ISO 15738.

PLATFORM SUP

Item	Part Number	Color	Opening		Closing	
			mbar	psi	mbar	psi
HP VALVE	VS2N0000	nero/black	1.5	21.75	1.25	18.12
	VS2N0001	nero/black	1.2	17.40	1.00	14.50

Tested in accordance with ISO standard number 15738:2019

RV 70 / RGV 70

The RV 70 and RVG 70 are ideal for any type of inflatable boat, such as dinghies, tenders, etc., of any size.

These products are 100% in-house tested before shipping, in accordance with ISO 15738.

A wide range of pressure ranges are available to suit any type of specifications of your boat.

The two models differ only in the method of fixing to the inflatable fabric:

The RV 70 can be welded thanks to its PVC collar.

The RVG 70, on the other hand, can be tightened using a ring nut.

TECHNICAL DATA SHEET

Item	Part Number	Calib.	Color	Opening			Closing		
				Pax 1000	mbar	psi	Pax 1000	mbar	psi
	KA080301	180/150	rosso/red	18.0	180	2.6	15.0	150	2.2
	KA080302	200/170	nero/black	20.0	200	2.9	17.0	170	2.5
RV 70	KA080303	230/200	grigio/grey	23.0	230	3.3	20.0	200	2.9
	KA080304	255/225	verde/green	25.5	255	3.7	22.5	225	3.3
	KA080305	280/250	blu/blue	28.0	280	4.0	25.0	250	3.6
	KA080173	180/150	rosso/red	18.0	180	2.6	15.0	150	2.2
	KA080174	200/170	nero/black	20.0	200	2.9	17.0	170	2.5
RVG 70	KA080175	230/200	grigio/grey	23.0	230	3.3	20.0	200	2.9
	KA080176	255/225	verde/green	25.5	255	3.7	22.5	225	3.3
	KA080177	280/250	blu/blue	28.0	280	4.0	25.0	250	3.6
SP Z183	R601149	/	nero/black	/					

RV 70

BARRIERS TOYS LARGE BOATS ALL TENTS

RGV 70

BARRIERS TOYS LARGE BOATS ALL TENTS

Tested in accordance with ISO standard number 15738:2019

Key for valve - SP Z183

VA 100

Designed to protect inflatable boats from excessive pressure due to over-inflation or increases caused by temperature changes. The valve can be left in the open position “OPEN” or closed, with periodic control opening and subsequent venting.

The cap is removable and opening and closing are done by rotating, with the palm of the hand pressed, until the colored dot matches the reference notch. 100% tested valve

A hexagonal key is required for the assembly of the cap by the manufacturer.

- Very reliable and precise
- Suitable for use in compliance with the ISO 15738 standard
- Diameter of the hole in the fabric: 37 mm

TECHNICAL DATA SHEET

LARGE BOATS SMALL BOATS

Item	Part Number	Calib.	Color	Opening			Closing		
				Pax 1000	mbar	psi	Pax 1000	mbar	psi
VA 100	A080195N	270/230	verde/green	2.7	270	3.9	2.3	230	3.3
	A080196N	300/270	giallo/yellow	3.0	300	4.3	2.7	270	3.9
	A080197N	350/310	rosso/red	3.5	350	5.1	3.1	310	4.5

Tested in accordance with ISO standard number 15738:2019

VA 50 / VA 285

The VA 50 and VA 285 valves are ideal for any type of inflatable structure, and are 100% tested in compliance with the ISO 15738 standard.

TECHNICAL DATA SHEET

Item	Part Number			Calib.	Color	Opening			Closing		
	PVC base	NBR base	PU base			Pax 1000	mbar	psi	Pax 1000	mbar	psi
VA 50	A080120	A080122	A080121	60/25	bianco/ white	6.0	60	0.87	2.5	25	0.36
	A080130	A080132	A080131	80/50	rosa/pink	8.0	80	1.16	5.0	50	0.72
	A080163	A080164	A080165	180/140	azzurro/ cyan	18.0	180	2.60	14.0	140	2.03
	A080140	A080142	A080141	200/150	oro/gold	20.0	200	1.44	15.0	150	2.17
	A080150	A080152	A080151	225/170	blu/blue	22.5	225	2.60	17.0	170	2.46
	A080160	A080162	A080161	250/200	arancio/ orange	25.0	250	2.90	20.0	200	2.90
	A080166	A080153	A080168	330/250	nero/black	33.0	330	4.79	25.0	250	3.63
VA 285	A080020			60/25	bianco/ white	6.0	60	0.87	2.5	25	0.36
	A080021			80/50	rosa/pink	8.0	80	1.16	5.0	50	0.72
	A080025			180/140	azzurro/ cyan	18.0	180	2.60	14.0	140	2.03
	A080022			200/150	oro/gold	20.0	200	1.44	15.0	150	2.17
	A080023			225/170	blu/blue	22.5	225	2.60	17.0	170	2.46
	A080024			250/200	arancio/ orange	25.0	250	2.90	20.0	200	2.90
	A080026			330/250	nero/black	33.0	330	4.79	25.0	250	3.63
SP Z182	R801372			/	nero/black	/					

VA 50

ALL TENTS

TOYS

VA 285

ALL TENTS

TOYS

Tested in accordance with ISO standard number 15738:2019

Key for valve SP Z182 - R801372

VA 30 / VA 280

The VA 30 and VA 280 valves are ideal for any type of inflatable structure, and are 100% tested in compliance with the ISO 15738 standard.

TECHNICAL DATA SHEET

Item	Part Number			Calib.	Color	Opening			Closing		
	PVC base	NBR base	PU base			Pax 1000	mbar	psi	Pax 1000	mbar	psi
VA 30	A080050	A080052	A080051	60/25	bianco/ white	6.0	60	0.87	2.5	25	0.36
	A080060	A080062	A080061	80/50	rosa/pink	8.0	80	1.16	5.0	50	0.72
	A080070	A080072	A080071	100/65	verde/green	10.0	100	1.44	6.5	65	0.94
	A080080	A080082	A080081	180/135	giallo/yellow	18.0	180	2.60	13.5	135	1.96
	A080090	A080092	A080091	200/150	oro/gold	20.0	200	2.90	15.0	150	2.17
	A080100	A080102	A080101	225/170	blu/blue	22.5	225	3.26	17.0	170	2.46
	A080110	A080112	A080111	240/185	rosso/red	24.0	240	3.48	18.5	185	2.68
	A080047	A080048	A080049	260/200	arancio/ orange	26.0	260	3.76	20.0	200	2.90
VA 280	A080001			60/25	bianco/ white	6.0	60	0.87	2.5	25	0.36
	A080002			80/50	rosa/pink	8.0	80	1.16	5.0	50	0.72
	A080003			100/65	verde/green	10.0	100	1.44	6.5	65	0.94
	A080004			180/135	giallo/yellow	18.0	180	2.60	13.5	135	1.96
	A080005			200/150	oro/gold	20.0	200	1.44	15.0	150	2.17
	A080006			225/170	blu/blue	22.5	225	2.60	17.0	170	2.46
	A080007			240/185	rosso/red	24.0	240	3.48	18.5	185	2.68
	A080008			260/200	arancio/ orange	26.0	260	3.76	20.0	200	2.90
SP Z182	R801372			/	nero/black	/					

VA 30

ALL TENTS

TOYS

VA 280

ALL TENTS

TOYS

Tested in accordance with ISO standard number 15738:2019

Key for valve SP Z182 - R801372

VA 240 / VA 20

The VA 240 and VA 20 valves are ideal for any type of inflatable structure, and are 100% tested in compliance with the ISO 15738 standard.

TECHNICAL DATA SHEET

Item	Part Number	Calib.	Color	Opening			Closing		
				Pax 1000	mbar	psi	Pax 1000	mbar	psi
VA 240	A101242	60/25	bianco/ white	6.0	60	0.87	2.5	25	0.36
	A101239	80/50	rosa/pink	8.0	80	1.16	5.0	50	0.72
	A101243	100/65	verde/green	10.0	100	1.44	6.5	65	0.94
	A101241	180/135	giallo/yellow	18.0	180	2.60	13.5	135	1.96
	A101249	200/150	oro/gold	20.0	200	2.90	15.0	150	2.17
	A101246	225/170	blu/blue	22.5	225	3.26	17.0	170	2.46
	A101240	240/185	rosso/red	24.0	240	3.48	18.5	185	2.68
	A121238	260/200	arancio/ orange	26.0	260	3.76	20.0	200	2.90
VA 20	A101027	60/25	bianco/ white	6.0	60	0.87	2.5	25	0.36
	A101023	80/50	rosa/pink	8.0	80	1.16	5.0	50	0.72
	A101021	100/65	verde/green	10.0	100	1.44	6.5	65	0.94
	A101020	180/135	giallo/yellow	18.0	180	2.60	13.5	135	1.96
	A101025	200/150	oro/gold	20.0	200	1.44	15.0	150	2.17
	A101022	225/170	blu/blue	22.5	225	2.60	17.0	170	2.46
	A101024	240/185	rosso/red	24.0	240	3.48	18.5	185	2.68
	A101028	260/200	arancio/ orange	26.0	260	3.76	20.0	200	2.90

VA 240

PLATFORM SUP KAYAK

LARGE BOATS ALL TENTS KITES

VA 20

ART. 687

Cod. KA401687 / Mat. PVC

Cod. KA402688 / Mat. PU

PLATFORM SUP KAYAK

LARGE BOATS ALL TENTS KITES

Tested in accordance with ISO standard number 15738:2019

VA 21

The valve is specifically designed to be installed on any type of tent, and allows the release of excessive air inside the inflatable.

TECHNICAL DATA SHEET

ART. 687

Item	Part Number	Calib.	Color	Opening			Closing		
				Pax 1000	mbar	psi	Pax 1000	mbar	psi
VA 21	A101170N	60/25	bianco/ white	6.0	60	0.87	2.5	25	0.36
	A101160N	80/50	rosa/pink	8.0	80	1.16	5.0	50	0.72
	A101150N	100/65	verde/green	10.0	100	1.44	6.5	65	0.94
	A101140N	180/135	giallo/yellow	18.0	180	2.60	13.5	135	1.96
	A101130N	200/150	oro/gold	20.0	200	1.44	15.0	150	2.17
	A101120N	225/170	blu/blue	22.5	225	2.60	17.0	170	2.46
	A101110N	240/185	rosso/red	24.0	240	3.48	18.5	185	2.68
	A101100N	260/200	arancio/ orange	26.0	260	3.76	20.0	200	2.90
	A101180N	350/300	nero/black	35.0	350	5.07	30.0	300	4.35

Tested in accordance with ISO standard number 15738:2019

ART. 695

Deflation valve used in applications such as underwater lift bags. This is a safety device that allows the bag to be deflated if necessary.
By manually opening the valve, the resulting air release allows the underwater lift to be slowed down or terminated.

Item	Part Number	Material	Color
ART. 695	A101261	Nylon	grigio/grey

Tested in accordance with ISO standard number 15738:2019

ART. 295 / ART. 296 / ART. 297

Hook made of loaded nylon, sturdy, quick to assemble and disassemble, significantly reduces the labor required to connect the tubes to the raft arch. It is possible to order the version with overpressure valve, with one-way valve, or two-way valve. The codes refer to the complete KIT. The parts are supplied in the 3 main components disassembled.

ART. 295: Overpressure valve

ART. 296: One-way valve

ART. 297: Two-way valve

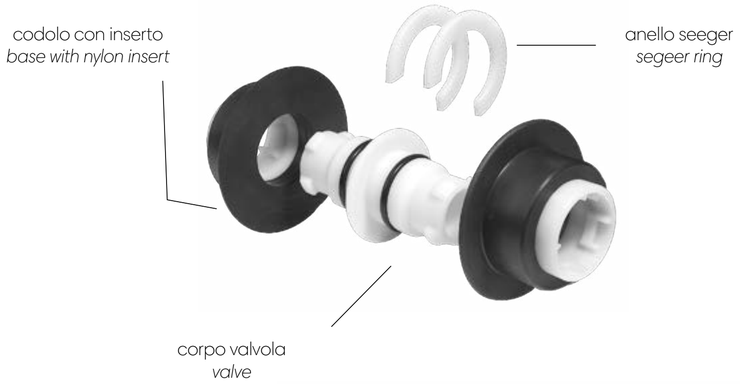

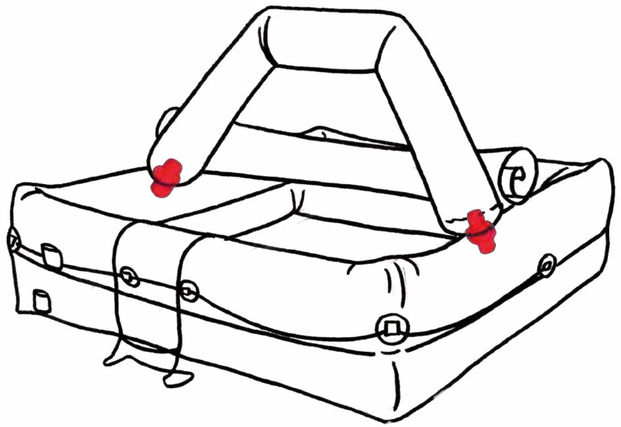

ON DEMAND, ONLY

Item	Part Number			Calib.	Color	Opening			Closing		
	PVC base	NBR base	PU base			Pax 1000	mbar	psi	Pax 1000	mbar	psi
ART. 295	A080200	A080204	A080208	60/25	bianco/ white	6.0	60	0.87	2.5	25	0.36
	A080202	A080206	A080210	80/50	rosa/pink	8.0	80	1.16	5.0	50	0.72
ART. 296	A080220	A080222	A080224	*With oneway valve*							
ART. 297	A080230	A080232	A080234	*With two-way valve*							

Tested in accordance with ISO standard number 15738:2019

VARIOUS FITTINGS

Inflation valve types compatible with the fitting are marked with the symbol ● on the side.

All part numbers in the boxes to the side are valid only for batches greater than 500 pieces.

For orders of smaller quantities see the spare parts list from page 101.

Art. 711
A600010

2000	●
2001	●
2005-2005/A	●
2014	●
HR	●

Art. 712
A600020

2000	●
2001	●
2005-2005/A	●
2014	●
HR	●

Art. 718
A600030

2000	
2001	●
2005-2005/A	
2014	
HR	●

Art. 718/ADJ
A600040

2000	
2001	●
2005-2005/A	●
2014	●
HR	●

REGOLABILE

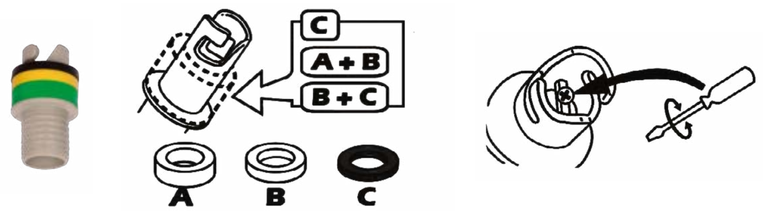

To fit the various valves, proceed as the drawing:

1) Insert the black gasket, which should always adhere to the valve

2)Insert spacer as needed

3)Adjust the height of the screw to make the valve open

Art. 718/2005
A600050

2000	
2001	
2005-2005/A	●
2014	
HR	

Art. 718/HR
A600060

2000	
2001	
2005-2005/A	
2014	●
HR	●

Art. 718/HRK
A600080

2000	
2001	
2005-2005/A	
2014	
HR	●

Art. 734
A600070

2000	●
2001	
2005-2005/A	
2014	
HR	

06. ACCESSORIES

- MANOMETERS
- NAUTICAL COMPONENTS

SP 150 - DIGITAL MANOMETRE

- Operating pressure: 0-999 mbar (0-14.5 psi)
- Resolution: 10 mbar (0.15 psi)
- Accuracy: < 1.0%
- Programmable units: mbar – psi – Kpa – bar - Pressure limit: >150%
- Enclosure protection rating: IP65
- Power supply: 9V-DC battery
- Batteries not included

Item	Part number	Pressure	Pcs
SP 150	R551088N	0-999 mbar (0-14.5 psi)	1

ANALOG MANOMETRES

They are measuring instruments used to detect pressure in a wide range of industrial applications. They work simply and reliably, thanks to a mechanism that transforms the pressure detected into a mechanical movement visible through the pointer on a dial.

Item	Part number	Pressure	Suitable for
SP 98/1	R201098	1 bar (14.5 psi)	/
SP 98/0.5	R201099	0.5 bar (7.3 psi)	/
SP 236	R201110	0 -2 bar	/
SP 237	R201111	0 - 1 bar	/
SP 90 SUP	R551097N	0.5/1.5 bar (7.3/21.8 psi)	/
SP 90-2 SUP	R551002N	0/2 bar (0/29 psi)	/
SP 90 B (bayonet)	R551093N	1 bar (14.5 psi)	/
SP 90 S (screwable)	R551098N	1 bar (14.5 psi)	/
SP 125/1.0	R551091N	1.0 bar (14.5 psi)	/
SP 125/0.5	R551094N	0.5 bar (7.3 psi)	/
SP 119/HR/0.5	R151093N	0.5 bar (7.3 psi)	HR
SP 119/HR/1.0	R151094N	1.0 bar (14.5 psi)	HR
SP 119/2005/0.5	R151096N	0.5 bar (7.3 psi)	Bravo 2005 / H3
SP 119/2005/1.0	R151095N	1.0 bar (14.5 psi)	Bravo 2005 / H3
SP 119/ADJ/0.5	R151092N	0.5 bar (7.3 psi)	adjustable
SP 119/ADJ/1.0	R151090N	1.0 bar (14.5 psi)	adjustable

ON DEMAND, ONLY

Item	Part number	Pressure	Suitable for
SP 119/ADJ/2.0	R151101N *	2.0 bar (29.0 psi)	adjustable

SP 98/1- SP 98/0.5

- 1 bar (14.5 psi) BRAVO 6M

- 0.5bar(7.3psi) BRAVO 7M / 8M

SP 236 - SP 237

- 2 bar (29.0 psi) BRAVO 100 / 101 / 4XS

-1bar(14.5psi) BRAVO110 / 4WD

SP 90 SUP - SP 90-2 SUP

- BRAVO SUP, BRAVO SUP HP

SP 119/HR/0.5
SP 119/HR/1.0

SP 90 S - SP 90 B

- Type B BRAVO 4 ALU RED, BRAVO 4 ALU RED KITE

S- avvitabile / *screwable*
B - baionetta / *baynet*

SP 125/1.0 - SP 125/0.

It allows pressure control (**A**), and progressive reading during inflation (**B**).



SP 119/HR/0.5
SP 119/HR/1.0

SP 119/ADJ/0.5
SP 119/ADJ/1.0
SP 119/ADJ/2.0

BOAT HANDLES

Handles made of PVC to be installed on boats.

Item	Part number	Material	Color	Dim. mm
333	A158416N	PVC	nero/black	90x280xh65
	A1584 06N	PVC	grigio/grey	90x280xh65
331	A158410N	PVC	nero/black	90x245xh47
	A158412N	PVC	grigio/grey	90x245xh47
322	A151322N	PVC	nero/black	90x220xh32
	A151323N	PVC	grigio/grey	90x220xh32
313 - BLACK	A151313N	PVC	nero/black	100x210xh38
306	A151306N	PVC	nero/black	260x110x45mm
	A158306N	PVC	grigio/grey	260x110x45mm
307	A151307N	PVC	nero/black	260x110x45mm
	A158307N	PVC	grigio/grey	260x110x45mm
321	A151321N	PVC	nero/black	70x205xh46
	A151324N	PVC	grigio/grey	70x205xh46

ON DEMAND, ONLY

Item	Part number	Material	Color	Dim. mm	MOQ
SP 119/ADJ/2.0	R151101N *	PVC	grigio/grey	100x210xh38	200 pcs

ART. 333

ART. 331

ART. 322

ART. 313

ART. 306 / ART. 307

To be ordered in pairs

ART. 321

BOAT OARLOK

Fixes oars for PVC dinghies

ART. 681

ART. 669

ART. 678

ART. 675



Item	Part number	Material	Color	Dim. mm	Hole mm
681	A309688N	PVC	grigio/grey	80x132xh44	Ø 32 - 35
669	A301669N	PVC	nero/black	64x91xh41	Ø 30
	A309669N	PVC	grigio/grey	64x91xh41	Ø 30
678	A301678N	PVC	nero/black	75xh118	Ø 35
	A309681N	PVC	grigio/grey	75xh118	Ø 35
675	A309676	PVC	grigio/grey	63x90xh22	Ø 10

BOAT ROWLOCK

Rowlocks of various sizes for fixing oars with different diameter openings.

Item	Part number	Material	Color	Dim. mm	Hole mm
122	A051123N	PVC	grigio/grey	130 x 91 x h 32	/

Item	Part number	Material	Color	Dim. mm	Hole mm
120 F	A059133N	PVC	grigio/grey	110 x 170 x h 40	/

Item	Part number	Material	Color	Dim. mm	Hole mm
141-90	A051410N	PVC	nero/black	90 x 200 x h 40	/
	A051420N	PVC	grigio/grey	90 x 200 x h 40	/
B1 H1	S241149N	nylon/nylon ottone/brass	nero/black	*see image pag. 93*	
	S241147N		grigio/grey		

Item	Part number	Material	Color	Dim. mm	Hole mm
145-90	A051451N	PVC	grigio/grey	90 x 200 x h 40	Ø 10

Item	Part number	Material	Color	Dim. mm	Hole mm
146-180	A051460N	PVC	nero/black	90 x 200 x h 40	Ø 10
	A051461N	PVC	grigio/grey	90 x 200 x h 40	Ø 10

Item	Part number	Material	Color	Dim. mm	Hole mm
140 F	A051400N	PVC	nero/black	90 x 200 x h 50	/
	A051401N	PVC	grigio/grey	90 x 200 x h 50	/

122

Can be combined with CH and BH rates

120 F

Can be combined with CH and BH rates

141-90

Can be combined with B1 and H1

145-90

To be used with oars with rose, Ø 10 mm.

146 -180

To be used with oars with rose window, Ø 10 mm.

140 F + Features

To be combined with BH

All types are removable without detaching the base. Pass-through top in all types.

BOAT OARLOCK HOLDERS

Rowlocks of various sizes for fixing oars with different diameter openings.

Item	Part number	Material	Color	Dim. mm	Hole mm
117	A051117N	PVC	nero/black	150 x 220 x h 30	/
	A059117N	PVC	grigio/grey	150 x 220 x h 30	/
620	A351620N	nylon	nero/black	80 x h 60 - Ø 35	/

Item	Part number	Material	Color	Dim. mm	Hole mm
BF	S241144N	nylon/nylon ottone/brass	nero/black	vedi immagine *see image*	vedi immagine *see image*
	S241178N		grigio/grey		
BH	S241176N		grigio/grey		
BL	S241173N		grigio/grey		
CH	S241151N		grigio/grey		
B1 H1	S241149N		nero/black		
	S241147N		grigio/grey		

117

620

B1 H1

BH

BF

BL



CH



BOAT ACCESSORIES

Practical and functional models of PVC cable ties and cord ties.

ART. 535

ART. 444

ART. 442

ART. 400

ART. 401

ART. 409



ART. 110

Oval mooring plate with nickel-plated brass ring.

Item	Part number	Material	Color	Dim. mm	Hole mm
535	A401535N	PVC	nero/black	250x200xh60	/
	A401536N	PVC	grigio/grey	250x200xh60	/
444	A201445N	PVC	grigio/grey	70x100xh33	Ø 13
442	A201443N	PVC	grigio/grey	88x58xh26	Ø 14
400	A205401N	PVC	nero/black	58x83xh24	Ø 13
	A205402N	PVC	grigio/grey	58x83xh24	Ø 13
401	A201401N	PVC	nero/black	Ø75-h19	Ø 13
	A291401N	PVC	grigio/grey	Ø75-h19	Ø 13
409	A201409	PVC	nero/black	73x62xh25	Ø 11
110	A051135N	PVC	nero/black	95x175xh22	/
	A051137N	PVC	grigio/grey	95x175xh22	/

AXLE SUPPORTS FOR BOATS

Plates to reinforce the stern mirror at the engine and distribute stresses over a wider area. Made of polypropylene, they help in the protection of the hull. Can be applied both inside and outside. Available in 4 sizes, grey or black.

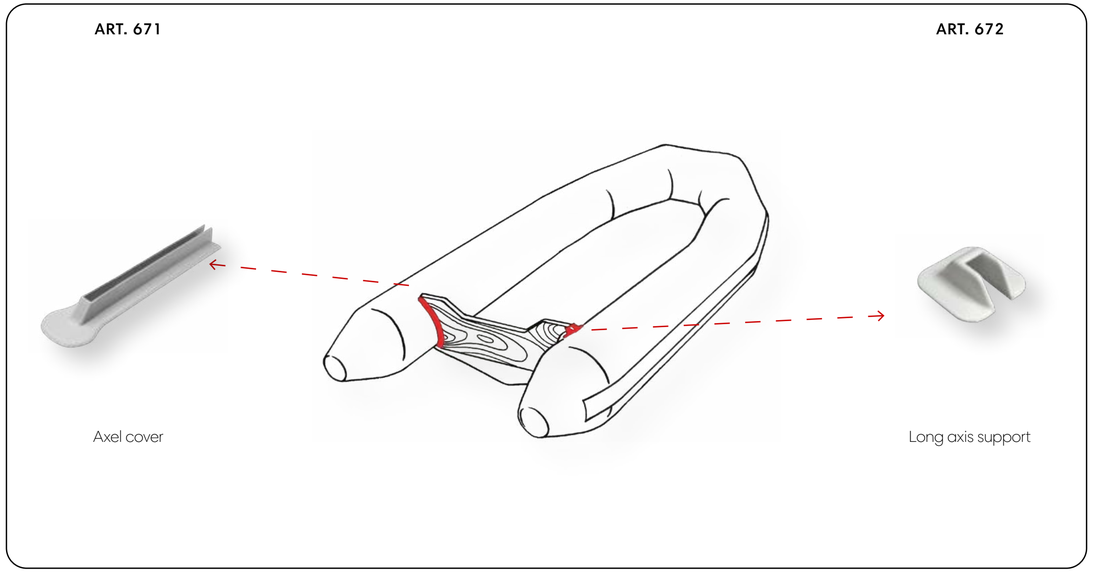

Item	Part number	Material	Color	Dim. mm	Hole mm
672	A401693N	PVC	nero/black	80x85xh32	22
	A401692N	PVC	grigio/grey	80x85xh32	22
671	A401672N	PVC	grigio/grey	540x100xh47	25,6
695	B184000N	PP	nero/black	223x84x5.5mm	/
	B184001N	PP	grigio/grey	223x84x5.5mm	/
696	B184010N	PP	nero/black	308x104x5.5mm	/
	B184011N	PP	grigio/grey	308x104x5.5mm	/
697	B184020N	PP	nero/black	300x209x7.5mm	/
	B184021N	PP	grigio/grey	300x209x7.5mm	/
698	B184030N	PP	nero/black	430x324x6.6mm	/
	B184031N	PP	grigio/grey	430x324x6.6mm	/

ART. 695

ART. 695

ART. 695

ART. 695

WATER DISCHARGES FOR BOAT

They are devices inserted in a hole on the bottom of a boat to allow water to flow out. It is a key component of a boat, preventing it from filling up with water and sinking.

ART. 612

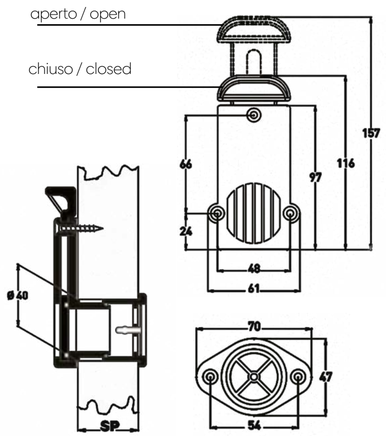

ART. 311

Emptying cap Ø37

Item	Part number	Material	Color	Model	Axis thickness
612	A403612	Nylon	grigio/grey	19/26	19 ÷ 26 mm
	A403613	Nylon	grigio/grey	25/39	25 ÷ 39 mm
	A403625	Nylon	grigio/grey	38/63	38 ÷ 63 mm
311	A401311N	Nylon	nero/black	/	/

ART. 615

Cones in PVC and rubber for inflatables and tender.

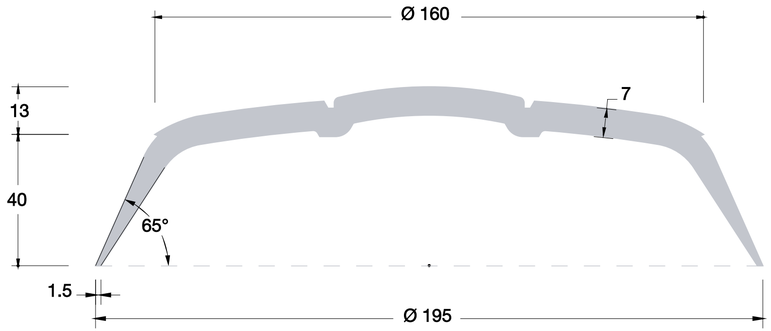

Item	Part number	Material	Color
615	A508001N	PVC	nero/black
	A401611N	PVC	grigio/grey
	A901613N	gomma/ rubber	grigio/grey

CENTRE FIN / FIN BASE

Removable fins ideal for inflatable SUP, and allow easy transport and storage.

CENTER FIN REMOVABLE BIG

REMOVABLE FIN SMALL

SIDE FIN SMALL

SIDE FIN BIG

CENTER FIN BASE BIG

FIN BASE SMALL

Item	Part number	Material	Color	Size
CENTER FIN BASE BIG	A401800N	ABS	nero/black	100 x 280 mm
CENTER FIN REMOVABLE BIG	A401801N	PA6 + 30% FIBERGLASS	nero/black	depth 220 mm
REMOVABLE FIN SMALL	A401803N	PA6 + 30% FIBERGLASS	nero/black	depth 140 mm
SIDE FIN SMALL	A401806N	PVC	nero/black	base 53 x 215 mm depth 75 mm
SIDE FIN BIG	A401807N	PVC	nero/black	base 55 x 195 mm depth 120 mm

ON DEMAND, ONLY

Item	Part number	Material	Color	Size
FIN BASE SMALL	A401802N	PVC / ABS	nero/black	75 x 200 mm

PROFESSIONAL LIFEGUARD

The particularly smooth surface and special shape make it easier to tow the life preserver to the person to be rescued.

The red colour allows excellent visibility even in adverse weather conditions. The rope is securely attached to the body to ensure maximum safety

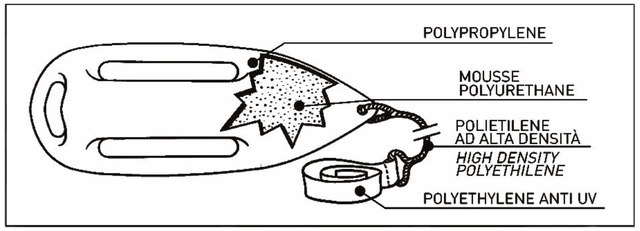



Item	Part number	Material	Color	Weight	Dimensions
Baywatch	6400300	PP / PE / PU	arancione / organge	1,2 kg	68 x 13 x 23 cm

VARIOUS ACCESSORIES

Accessories for the nautical world.

ART. 242



Ring of Lance

ART. 300

Handle

ART. 210

Pool valve

ART. 634

Oblique tail

ART. 639

Rod

Item	Part number	Material	Color	Dim. mm	Hole mm
242	A251242N	Expanded PVC	rosso/red	Immagine/Image	Ø100
300	A151300	PVC	nero/black	200 x 90 x h42	/
210	A101210	PVC	nero/black	61x h15	Ø29
634	A401634	PVC	nero/black	104 x 68 x h30	/
639	A401639N	Nylon	nero/black	265	/

VARIOUS ACCESSORIES

Accessories for the nautical world.

ART. 199



ART. 404

ART. 403

Item	Part number	Material	Color	Dimm. mm	Hole mm
199	A401500	Nylon	bianco/white	35x33xh15	Ø4
404	A201404	PVC	nero/black	Ø39-h16	Ø10
403	A201403	PVC	nero/black	Ø60-h19	Ø12
	A203403	PU	nero/black	Ø60-h19	Ø12

07. | SPARE PARTS

- FITTINGS AND PIPES
- VALVES AND COMPONENTS
- POWER SUPPLY AND BAGS

VALVE FITTINGS

SP 47	SP 712
R151047	R151048

Art. 711 / Art. 712
Valve fittings for foot and hand inflators

SP Z011
R210014

Bayonet fitting kit

RH0S0046

Valve fittings kit for TUBOMAX

SP 120
R551120

Art. 734
Valve fitting BRAVO 2000

SP 118
R151062

Art. 718
Bayonet fitting for BRAVO 2001/ BRAVO 2004/HR valves

SP 138	SP Z023
R151064	R210031

Art. 718/ADJ
Universal bayonet fitting
Interlocking version/ Connectable version

SP 139
R151065

Art. 718/2005
Bayonet fitting for BRAVO valve 2005

SP Z003
R151066

Art. 718/HRK
Bayonet fitting for H3 valves

SP Z022
R210030

Art. 718/2005-HR-HRK
Bayonet fitting for BRAVO valves 2005/HR/HRK
Version that can be connected

SP 143
R151068

Art. 718/HR
Bayonet fitting for BRAVO 2014/ HR/SUPER VALVE

SP Z135
R151136

Reduction gear ø 40-25 mm with bayonet exit

SP 15	SP 16
R151015	R151016

Triple fitting ø 20 mm / ø 25 mm

SP Z184
R333370

Dimensions:
1,25 m x Ø 20 mm - EPDM

Pumps:
GE BP-1 / GE 22 RC / GE 10-B A.R.S.

Tubo/Hose GE BTP-2
RH0S0024

Dimensions:
1,25 m x Ø 20 mm - EPDM

Pumps:
GE BTP-1 / GE BTP-2

SP 218
R151035

Dimensions:
1,25 m x Ø 20 mm - EPDM

Pumps:
GE 20-2 / GE 25 / GE 21-1A

SP 217
R151052

Dimensions:
1,5 m x Ø 25 mm (PU)

Pumps:
OV 10 / OV 6 / GE 2000 - A.R.S. (standard fitting) / GE 900 - A.R.S.

SP Z185
R811116N

Dimensions:
1,5 m x Ø 25 mm (PVC)

Pumps:
OV4 con connettori standard / *OV4 with standard connector*

SP Z009
R210012

Dimensions:
1,25 m x Ø 21 mm (PVC)

Pumps:
BRAVO 100 / BRAVO 100 D

SP Z050
R210050

Dimensions:
1,7 m x Ø 21 mm - PVC

Pumps:
GE 230/800 - GE 230/1000

SP Z188
R990047

Dimensions:
1,25 m x Ø 20 mm - EPDM

Pumps:
GE BP-1 / GE 22 RC / GE 10-B A.R.S.

SP Z189
R990048

Dimensions:
1,25 m x Ø 20 mm - EPDM

Pumps:
GE BTP-1 / GE BTP-2

SP Z190
R990049

Dimensions:
1,25 m x Ø 20 mm - EPDM

Pumps:
GE20-2 / GE 21-1A / GE25

SP Z094
R990023

Dimensions:
1,25 m x Ø 20 mm - EPDM

Pumps:
GE BP / BP 12 / GE BTP / BTP 12 / GE BTP-1

SP 214/NEW
R151025

Dimensions:
2,8 m x Ø 25 mm - PU

Pumps:
TURBO MAX (> 2011)

SP 212 S
R151017N

Dimensions:
1,25 m x Ø 20 mm - LDPE+EVA

Pumps:
GM 4 / BRAVO 4 SH

SP 212 SUP
R151022N

Dimensions:
1,25 m x Ø 20 mm - LDPE+EVA

Gonfiatori - *Pumps*:
BRAVO SUP / SUP HP / SUP-3

SP 212 S3-K
R151027N

Dimensions:
1,25 m x Ø 20 mm - LDPE+EVA

Pumps:
BRAVO SUP / SUP HP / SUP-3

SP 212 B
R151020N

Dimensions:
1,25 m x Ø 20 mm - LDPE+EVA

Pumps:
GM 4 ALU R.E.D

SP 212 BK
R151021N

Dimensions:
1,25 m x Ø 20 mm - LDPE+EVA

Pumps:
GM 4 ALU R.E.D. KITE

SP 235
R151051

Dimensions:
1,25 m x Ø 21 mm (PVC)

Pumps:
BRAVO 101 / BRAVO 110 / GM 5 / GM NX / GM NXS / GM 6 / GM 4 XS / GM 4 WD / GM 110 MIL

SP 13
R151013

Dimensions:
1,6 m x Ø 16 mm - PVC

Pumps:
BRAVO 6 / BRAVO 6M / BRAVO 6 MIL / BRAVO 12

SP 14
R151014

Dimensions:
1,7 m x Ø 21 mm - PVC

Pumps:
BRAVO 1 / BRAVO 2

SP Z180
R151087

Dimensions:
1,7 m x Ø 21 mm - PVC

Pumps:
BRAVO 10 / GP 10

SP Z141
R151078

Dimensions:
1,7 m x Ø 21 mm - PVC

Pumps:
GP 5

SP 213
R151018

Dimensions:
1,7 m x Ø 21 mm - PVC

Pumps:
BST 800 / BST 800 BATTERY / BST 300 / GE 10-3 / GE 10-8 / GE 10-B

RH0S0050

Dimensions:
1,5 m x Ø 25 mm - PU

Pumps:
GE 900 serie

SP 215
R151030

Dimensions:
1,5 m x Ø 25 mm - PU

Pumps:
OV10 / OV6 / GE2000 - A.R.S. (adapter 718/2005 glued in) / GE 900 - A.R.S.

SP Z006
R151131

SP Z006 - 1,5 m x Ø 40 mm - PVC

Pumps:
OV10-40 / GE 900 / GE 900 ARS / GE 230/2000 / GE 120-230/2000 + A.R.S.

EPDM hose
RH0S0030

Tubo EPDM -260HV / *EDPM hoes-260HV.*
- 1,5 m x Ø 40 m -

Pumps:
PCS / GE2000/65 / GE 1800 ROMA / GE 1800 EL

EPDM hose
RH0S0040

Tubo / *hoes* 260HV
1,5 m x Ø 40 m - EPDM

Pumps:
PCS / GE2000/65 / GE 1800 ROMA / GE 1800 EL

PVC hose
RH0S0052

Tubo / *hoes* 260HV
1,5 m x Ø 40 m - PVC

Gonfiatori - *Pumps*:
GE 1800 ROMA / GE 1800 EL

SP Z126
R151133

SP Z126 – 1,5 m x Ø 40 mm - EPDM

Pumps:
OV10-40 / GE 900 / GE 900 ARS / GE 230/2000 / GE 120-230/2000 + A.R.S.

SP Z036
R211007

Art. 810
Hose 25 m/ø 21 mm - PVC

SP Z031
R211002

25 m reel / Ø25 mm - PU

Pumps:
TURBOMAX

SP Z032
R211003

Art. 850
Hose 15 m x Ø 40 mm - EPDM

SP Z025
R210033

Art. 741 - Hose-Pump fitting for BRAVO 2000/BRAVO2000ARS /OV10/OV6 - ø 25 mm

SP Z024
R210032

Art. 741 - Hose-Pump fitting for BRAVO 2000/BRAVO2000AR S/OV10/OV6 - ø 40 mm

SP Z027
R210035



Art. 760
Fitting for valve 260 H.V.

SP Z134
R151134

Y hose-pump fitting

SP Z013
R210017

Hose-Pump fitting for PCS/BRAVO 2000 IP 65/ BRAVO2000ARSIP65-ø40mm

SP Z014
R210018

Hose-Pump fitting for PCS/BRAVO 2000 IP 65/ BRAVO2000ARSIP65-ø25mm

SP 46
R151046

Hose-Pump fitting for BRAVO 1/BRAVO 2/BRAVO 10

SP Z026
R210034

Art. 795 – PVC reduction Hose-Fitting - ø 25/20 mm
For ø25mm coils or tubes

SP Z115
R210053

Deflation fitting to be attached on the bottom.
For GE 230/1000

SP 20
R201020

Closing clip for GP 10

SP 157
R151024N

Fitting for pressure control hose and inflation valve (BRAVO 2005/H3)

SP 156
R151023N

Fitting for pressure control hose and inflation valve (HR)

SP Z034
R211005



Art. 866 – Hose for pressure control 15 m/ø 6 mm - PU

SP 216
R151032

Orange bayonet connector for TURBO MAX

SP Z125
R151050



Case for BST 800 BATT e GE10-B

KITS AND ACCESSORIES FOR INFLATABLES AND INFLATABLES

SP 55	SP 17
R101065	R101017

Glue kit (gr.5) and PVC foil / Professional adhesive for PVC (gr.28)

SP 50
R101060

Spare parts/repair kit:
1 x Screw Valve Cap
2 small caps
2 medium caps
1 inflator fitting
1 PVC leaf
1 tube of glue (5 g)

SP 75/B
R601075

Empty plug + BASE - black

SP 103
R601076

Empty plug (plug only) - black

SP 75/G
R601080

Empty plug + BASE - grey

SP 43
R201043

SP 129/2005/G	SP 129/2005/B
R601148	R601147

Inflation valve
BRAVO 2005 - grey / black

SP 129/2001/G	SP 129/2001/B
R601130	R601129

Inflation valve
BRAVO 2001 - grey / black

SP 129/2000/G	SP 129/2000/B
R601146	R601145

Inflation valve
BRAVO 2000 - grey / black

SP Z183
R801374

Key for valve BRAVO 260 H.V.

SP Z182
R801372

Key for valves
VA 280 / VA 30 / VA 50 / VA 285

SP 136
R601141

Key for BRAVO 2000 / BRAVO 2001/ BRAVO 2004 / BRAVO 2005 / BRAVO 2014 / SUPER VALVE/VA 100

PCS: 6

PCS: 6

PCS: 6

POWER SUPPLY FOR INFLATORS

SP 21
R210021

Batteria per GE20-2, GE21-1A e GE25SL, GE 10-B

Battery for GE20-2, GE21-1A and GE25SL, GE 10-B

SP Z136
R990055

Battery charger for GE25 HP (before 2023) and KIT HP

SP #33
R990033

Battery charger for GE 10-B, GE20-2, GE25 SL and KIT SL

SP #35
R990035

Battery charger for BST 800 BATT / BRAVO 12 BATT

SP #36
R990036

Battery charger for GE21-1A

SP 221
R151038

12V Cigarette plug for: GE20-2 and GE25

SP 228
R151034

12V Cigarette plug for: BST 800 BATT and BRAVO12 BATT

SP Z051
R210051

12V Cigarette plug for GE21-1A

SP Z093
R990022



Alligators for GE20-2 (K6130702), BP12 (K6131300) and BTP12 (K6131200)

SP Z155
R990068

0,5 m Cable with cigarette lighter forBST 300/800 / GE BP-1/ BTP-1 / 10-8 / 10- 3

WL0S0023

Power cable with alligators for BTP-2 MiMa

SP Z166
R401159

Connectors for TURBO MAX KIT

SP Z157
R990070

Power supply cable with cigarette lighter for GE BP-1/BTP-1/BTP-2
(For systems with maximum output current up to 20 A)

SP Z149
R990062

Clip for GE BP-1, Battery KIT and GE BTP series

BAGS & BATTERY

SP 225
R151042

TURBO MAX

SP 227
R151044

GE 20-2

SP Z002
R151045

GE 21-1A

SP Z140
R151077

GE 25 / GE 22 CAPRI

SP 222
R151039

BST 800 BATTERY / GE 10-B

SP 230
R151069

BST 300 / BST 800 / GE 10-3 / GE 10-8

SP Z138
R151074

GE BP / GE BP-1

SP Z139
R151075

GE BTP-1 / GE BTP-2

SP Z028
R210036

Sacca per pompe a mano

Transport mesh bag for hand pumps

SPARE PARTS FOR UPPER ACCESSORIES

SP 105	SP Z040	SP 106	SP 209	SP 211	SP Z158
R251010N	R212003	R251012	R151029N	R151033N	R605100N
Plastic screw collars for SUP paddles	*NBR foam handle for SUP paddles*	*Push-pin for SUP paddles*	*O-ring for BRAVO SUP / BRAVO SUP-3 pump*		*Safe deflate adapter*

08. | AEDRA - Luxury Watersports

- OVERVIEW
- ELECTRIC INFLATOR
- SUP KIT

OVERVIEW

AEDRA Luxury Watersports is a brand that belongs to the **Scoprega S.p.a.** group and it was born from the need to offer a range of high quality solutions, adapting to the changing needs of the market and anticipating trends.

AEDRA represents **high-end products such as Jetboards, SUP and the latest generation of electric inflators.** Our goal is clear: to position ourselves as one of the most contemporary, innovative and elegant brands in the world of boating and water sports.

The vision of AEDRA focuses on **reinterpreting experience.**

AEDRA is the place where water goes beyond the ordinary and **luxury becomes a way of life.** It is an exploration of an experiential aquatic ecosystem designed to offer maximum enjoyment. Immerse yourself in the maximum of satisfaction and redefine your way of living water.

MAXXIVE

The inflator is compact, easy to use and elegant.

It is tailor-made for boats with integrated inflation system.

The MAXXIVE offers excellent performance and the possibility of automatic pressure control (A.R.S.) with a low noise level.

Touchscreen display

Included accessories

Connector kit for electrical connection

Ø 21 mm hose

Valve fittings

LARGE BOATS SMALL BOATS

USER MANUAL

Item	Part number	Max. Pressure	Max air flow	Voltage	Max. Current	Weight
MAXXIVE 12V	AD2S0001	240 mbar (3.5 psi)	700 l/m	9 ÷ 16 Vdc	45-60 A	1.45 kg
MAXXIVE 24V	AD2S0005	240 mbar (3.5 psi)	700 l/m	18 ÷ 32 Vdc	23-30 A	1.45 kg

FUNZIONI

Gonfia e sgonfia

INFO & PRODUCT DETAILS

Go to website

INFINITE

The INFINITE inflator is distinguished by its high performance (1.2 bar and 500 l/min of initial volume) and the ability to inflate and deflate a wide range of objects, including kite, SUP, small inflatables, mats, etc...

With an integrated touch screen for intuitive control and a very low noise level, it ensures an easy, fast and quiet experience.

Touchscreen display

Included accessories

Ø 21 mm hose

Valve fittings

Electric cable connector

SUP | PLATFORM | KITES | KAYAK | LARGE BOATS | SMALL BOATS

USER MANUAL

Item	Part number	Max. Pressure	Max air flow	Voltage	Max. Current	Weight
INFINITE 12V	AD2S0006	1,25 bar (18,1 psi)	500 l/m - 150 l/m	9 ÷ 16 Vdc	45-60 A	2.15 kg
INFINITE 24V	AD2S0007	1,25 bar (18,1 psi)	500 l/m - 150 l/m	18 ÷ 32 Vdc	23-30 A	2.65 kg

FUNZIONI

Gonfia e sgonfia

INFO & PRODUCT DETAILS

Go to website

ESSENTIAL SUP KIT

The AEDRA ESSENTIAL KIT is currently the only one able to guarantee transport comfort combined with compactness and lightness.

Each object is stored and positioned in such a way that the weight is less noticeable and comfort is ensured.

The ESSENTIAL KIT is composed of a SUP board, a sturdy and compact backpack, a carbon fibre paddle and a hand pump.

As an option within the kit, in replacement for the hand pump, it is possible to have the electric inflator GE 22 CAPRI.

SUP - Dropstitch with EVA

Paddle

Light and compact backpack

Supuer F - Handpump

GE 22 CAPRI - optional

USER MANUAL

Item	Part number
ESSENTIAL SUP KIT	EIS5101

KIT 4 KIDS

The KIT 4 KIDS is the ideal kit for all young people who want to learn how to practice SUP.
The practical and light board allows everyone to make turns in total safety and speed, while the large platform offers space on which young people can lie.
The KIT is practical and convenient for carrying thanks to the handy bag.
Inside, in addition to the SUP board, there is a fiberglass paddle and a hand pump for inflating.

USER MANUAL

Item	Part number
KIT 4 KIDS - SUP KIT	EIS5301

COMPANY INFO

- DEALERS & DISTRIBUTORS
- TECHNICAL ASSISTANCE
- BUSINESS CONTACTS

RETAILERS & DISTRIBUTORS

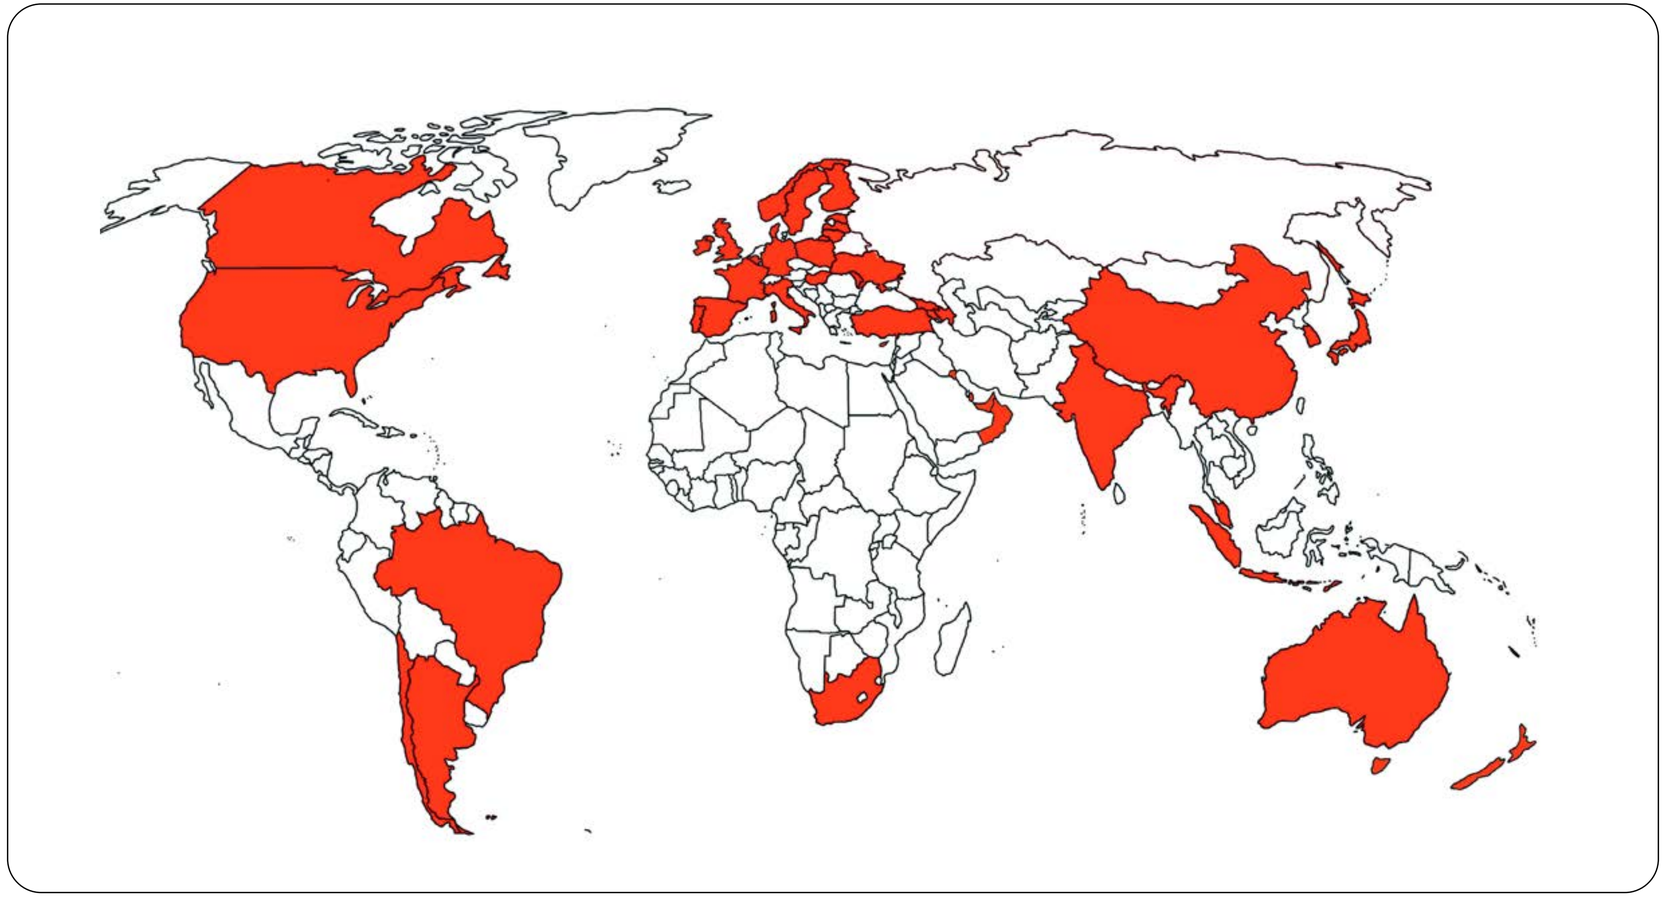

Through our network of distributors and specialized and qualified service centers, Scoprega offers the attention and care necessary for your product to be always performing. At our service centres you will always find professionalism and competence available. See **HERE** the complete list

TECHNICAL SUPPORT

Scoprega, on all products, thanks to the various centers located in Europe and America, offers technical assistance at international level.

In case of a product purchase, and a non-conformity finding during the Legal Warranty period, each service center will be able to help you, both for the repair of a product and for a support request.

The technical staff is certified by Scoprega and uses original spare parts for all repairs.

Areas	Authorised repairer	Address	Contacts
Europa	Scoprega S.p.A.	Via L. da Vinci 63 - 20062, Cassano D'Adda (MI) - Italy	customercare@scoprega.it
Repubblica Ceca	VODAK SPORT S.R.O.	BRATISLAVSKA 31, 60200, BRNO - Czech Republic	info@vodak-sport.cz
USA	PROKITESURF LLC	104 Cox Dr., 78374 Portland, Texas - USA	info@pksdistribution.com
Canada	North West Marine Distributors Ltd	26940 26TH AVENUE, ALDERGROVE, BC V4W 4A4 - CANADA	+1 604-607-7901
Canada	Auto Marine Specialties Ltd	4718 - 1 STREET SW, CALGARY, AB SW T2G 0A2 - CANADA	+1 (403) 287-2120

BUSINESS CONTACTS

Managing contacts within a business allows you to maintain strong relationships with customers, suppliers and partners.

Managing these contacts also allows us to understand the needs and preferences of our consumers, ensuring a personalized service and better loyalty.

This maintenance of positive relationships with our suppliers helps to ensure the constant supply and maintain high quality of the products or services we offer.

The **commercial references** of Scoprega S.p.A., with the relative **commercial areas.**

CRISTINA BRUSAMOLINO brusamolino@scoprega.it

Sales Area Manager

Algeria, Argentina, Belgium, Brazil, Bulgaria, Chile, Colombia, Costa Rica, Denmark, Finland, France, Hong Kong, Indonesia, Island, Malaysia, Mauritius, Mexico, Morocco, Panama, Portugal, Puerto Rico, Singapore, South Africa, South Korea, Spain, Taiwan, Thailand, Tunisia, Venezuela, Vietnam

VALENTINA FACCHINETTI facchinetti@scoprega.it

Sales Area Manager

Australia, Canada, Croatia, Cyprus, Egypt, Estonia, Greece, Hungary, India, Ireland, Israel, Italy, Japan, Kuwait, Latvia, Lithuania, Macedonia, Malta, Montenegro, New Caledonia, New Zealand, Norway, Oman, Qatar, Romania, Serbia, Slovak Republic, Slovenia, Sri Lanka, Sweden, Switzerland, Turkey, UAE, Uganda, Ukraine

DELIA BASSANINI bassanini@scoprega.it

Sales Area Manager

Austria, Czech Republic, Germany, Netherlands, Poland, UK, USA

SCOPREGA S.P.A.

Via L. Da Vinci 63 - Cassano d'Adda (Milan) Italy 20062

Phone: + 39 036364240

Fax: +39 0363 64171

info@scoprega.it

www.scoprega.it